

Overview

The H136 is an advanced application processor designed specifically for the projection market. It has a rich set of peripheral interfaces and many new features to provide a low-cost overall solution design.

Highlights

- Integrated 64-bit RISC CPU processor provides powerful computing performance.
- Embedded 128 MB DDR3L for reducing the BOM cost.
- Supports H.265/H.264 1080p@60fps video decoding, and MJPEG/JPEG 1080p@60fps video encoding.
- Rich peripheral interfaces: USB, GMAC, SDIO, UART, SPI, PWM, GPADC, GPIO_ADC, IR, and so on.
- Rich video interfaces: RGB888, Dual-LVDS, and MIPI-DSI for Display; DVP-CSI for video input.
- Important special characteristic: 2 x HDMI RX and 4-point keystone correction.

Features

CPU	<ul style="list-style-type: none"> • XuanTie C906 RISC-V CPU • 64 KB I-cache + 64 KB D-cache
Memory	<ul style="list-style-type: none"> • SiP 128 MB DDR3L • SD3.0, eMMC 4.41, SPI Nor Flash
Video Engine	<ul style="list-style-type: none"> • Video decoding <ul style="list-style-type: none"> -H.265 up to 1080p@60fps -H.264 up to 1080p@60fps -H.263, MPEG-1/2/4, VC-1, up to 1080p@60fps • Image decoding <ul style="list-style-type: none"> -JPEG up to 1080p@60fps • Video encoding <ul style="list-style-type: none"> - JPEG/MJPEG up to 1080p@60fps - Maximum resolution: 8192x8192 - Supports input picture scaling. The scaling ratio for width and height is 0.25 to 8.
Display Engine	<ul style="list-style-type: none"> • Allwinner Awonder1.1 Lite post processing for an excellent display experience • Supports keystone correction in online mode and [-360°,360°] rotation in offline mode • Supports de-interlace (DI) up to 1920x1080@60fps • Supports G2D hardware accelerator including rotate and mixer functions


Features

Video OUT	<ul style="list-style-type: none">• 1 x RGB888 output interface up to 1920 x 1080@60fps• Dual link LVDS interface up to 1920 x 1080@60fps• 4-lane MIPI DSI interface up to 1920 x 1200@60fps (reduced blanking)
Video IN	<ul style="list-style-type: none">• 2 x HDMI RX interfaces<ul style="list-style-type: none">- Up to 3840 x 2160 @30fps- Supports HDCP1.4, CEC, and ARC• 8-bit parallel CSI interface
Audio	<ul style="list-style-type: none">• 2 DACs• Analog audio interfaces: LINEOUTLP/N, LINEOUTRP/N• Digital audio interfaces: I2S/PCM, DMIC, OWA IN/OUT
Security	<ul style="list-style-type: none">• AES, DES, 3DES encryption and decryption algorithms• RSA signature verification algorithm• MD5/SHA and HMAC tamper proofing• Hardware random number generator• Integrated 2 Kbits eFuse storage space
Connectivity	<ul style="list-style-type: none">• 1 x USB2.0 DRD, 1 x USB2.0 Host• SDIO 3.0, LEDC, 2 x SPI, 6 x UART, 4 x TWI• 8-ch PWM, 1-ch GPADC, 3-ch GPIO_ADC(GPIO_ADC pad can be used by GPIO), IR TX&RX• 1 x 10/100/1000M Ethernet port with RMII and RGMII interfaces• 1 x 10/100 Ethernet port with RMII interface
Package	<ul style="list-style-type: none">• QFP128, 14 mm x 14 mm

Block Diagram



Application Diagram

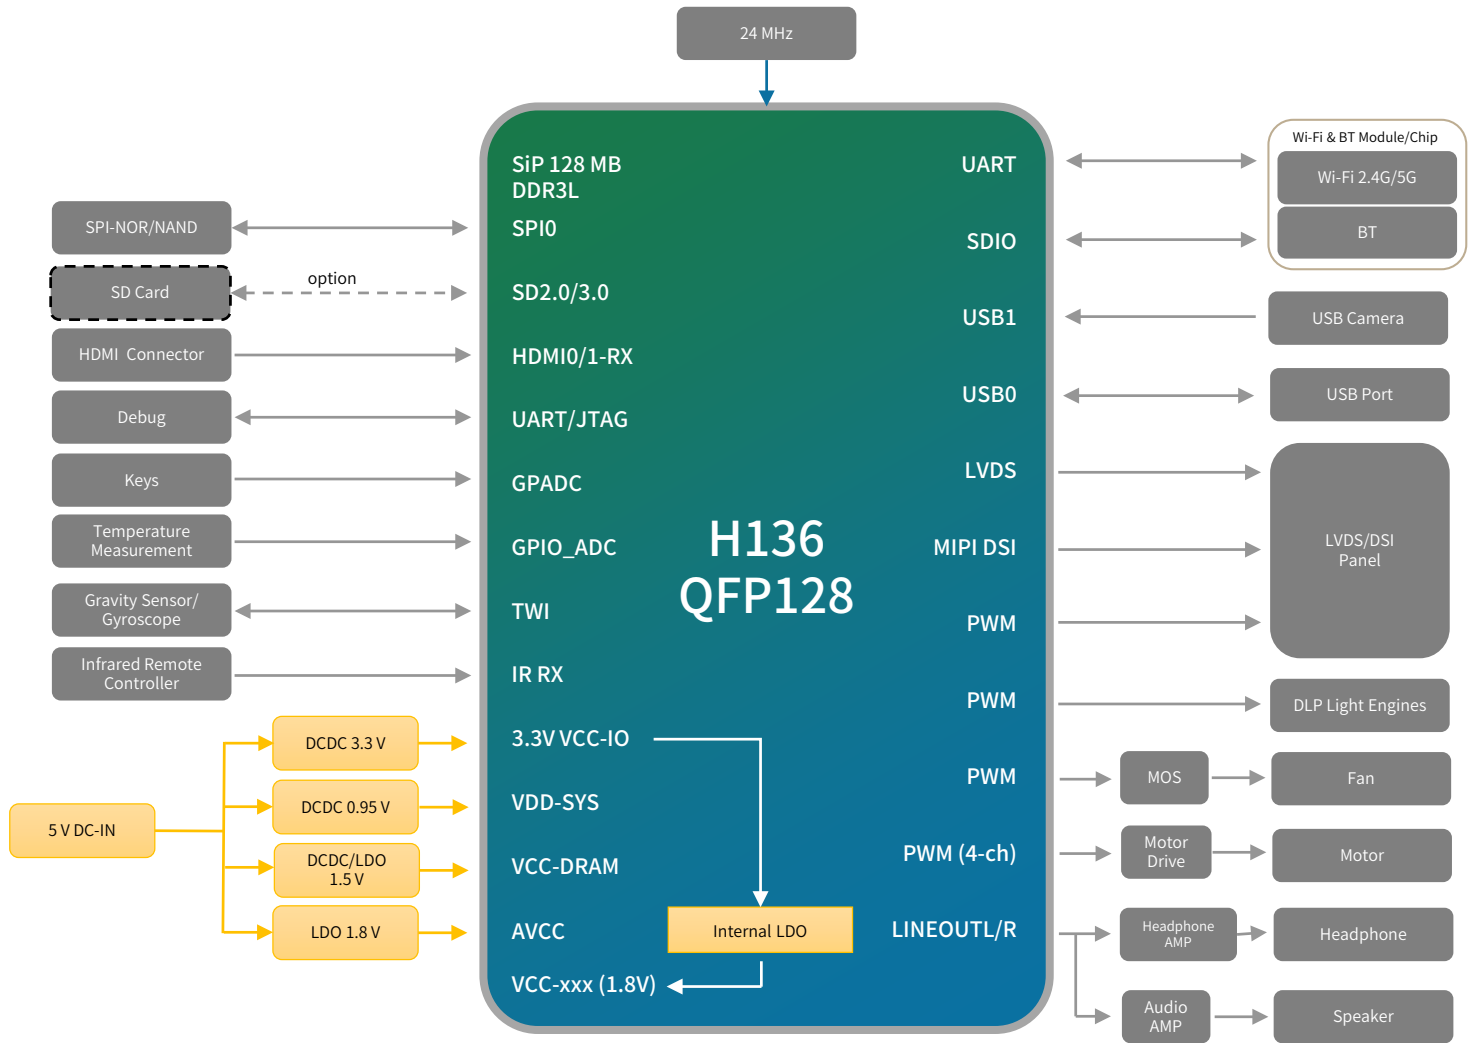

ABOUT ALLWINNER

Allwinner Technology, founded in 2007, is a outstanding designer dedicated to intelligent application SoC, high performance analog component and wireless connectivity IC. It is headquartered in Zhuhai China, with other R&D centers and offices in Shenzhen, HongKong, Xi'an, Beijing and Shanghai. Listed on the GEM of the Shenzhen Stock Exchange in 2015, with the stock code 300458.

Motivated by customer-oriented strategy, Allwinner aligns remarkable R&D teams with long-term core-technology investment in UHD video processing, high-performance multi-core CPU/GPU integration with AI and advanced manufacturing process in terms of high integration , ultra-low power consumption and full-stack integration platform, providing competitive turnkey solutions with considerate services. The products powered by Allwinner spread across from smart hardware, smart home, consumer electronics, HD media, smart video, connected car, industry control, wireless communication to analog products.

CONTACT US

Email: service@allwinnertech.com

This brief is for reference only and has no commitment. All content contained herein is subject to changes without notice.

©2025 Allwinner Technology Co., Ltd.