

# Fibocom

PERFECT WIRELESS EXPERIENCE

---

## FIBOCOM L610 Series

# AT Command

Version: V3.6.8

Date: 2020-06-16



### Application Type

No.	Product Model	Description
1	L610 Series	NA

FIBOCOM  
Confidential



## Copyright

Copyright ©2020 Fibocom Wireless Inc. All rights reserved.

Without the prior written permission of the copyright holder, any company or individual is prohibited to excerpt, copy any part of or the entire document, or transmit the document in any form.

## Attention

The document is subject to update from time to time owing to the product version upgrade or other reasons. Unless otherwise specified, the document only serves as the user guide. All the statements, information and suggestions contained in the document do not constitute any explicit or implicit guarantee.

## Trademark



The trademark is registered and owned by Fibocom Wireless Inc.

FIBOCOM  
Confidential

## Change History

Version	Author	Assessor	Approver	Update Date	Description
V3.6.8	Zhou ChaoSi	Long Zhongyou	Long Zhongyou	2020-06-16	1.Modify the default set of +MSMPD in chapter 4.1.11 2.Delete models not related to this document
V3.6.7	Zhou ChaoSi	Long Zhongyou	Long Zhongyou	2020-06-06	Modify format
V3.6.6	He Jiazhao	He Jiazhao	Wang Hailiang	2020-04-12	Standardized format
V3.6.5	Ron	Long ZhongYouCh eng TaoTao	Long ZhongYou	2020-03-31	Modify CMD +GTUSBMODE
V3.6.4	Long ZhongYou			2020-02-28	Modify format
V3.6.3	Long ZhongYou			2020-02-21	Modify font color
V3.6.2	Robin	Long ZhongYou	Long ZhongYou	2020-01-05	Delete CMD GTUMODE
V3.6.1	Robin	Long ZhongYou	Long ZhongYou	2019-11-30	Initial version
V3.6.0	Shu Min			2019-05-20	Update string type description etc.
V3.4.0	Shu Min			2018-09-25	Update MSMPD Command and so on
V3.3	Lv Yi			2018-07-23	Update the +CFUN/+GTACT/+ATV
V3.2	Lv Yi			2018-04-13	Update the +SMMFULL/GTRAT/MGAUTH/COPS/ CPBF
V3.1	Lv Yi			2018-02-28	Update some AT commands information
V3.0	Lv Yi			2018-01-04	Revise some AT commands to meet 3GPP Specification
V2.1	Lv Yi			2017-08-10	Revise some comments of AT

Version	Author	Assessor	Approver	Update Date	Description
					commands
V2.0	Lv Yi			2017-07-18	Use new format for all AT commands
V1.0	Li Junpeng			2013-05-01	Initial version

FIBOCOM  
 Confidential

# Contents

<b>1</b>	<b>Preface</b> .....	<b>11</b>
1.1	Manual Scope .....	11
1.2	Target Audience.....	11
<b>2</b>	<b>Introduction to AT Commands</b> .....	<b>11</b>
2.1	AT Commands Overview.....	11
2.2	General System Abbreviations .....	11
2.3	AT Commands Protocol .....	12
2.4	AT Commands Structure .....	13
2.4.1	<i>General Symbols Used in AT Commands Description</i> .....	13
2.4.2	<i>Command Structure</i> .....	13
2.4.3	<i>Results Code Structure</i> .....	14
2.5	Command Syntax.....	14
<b>3</b>	<b>Modem Information</b> .....	<b>15</b>
3.1	General information.....	15
3.1.1	<i>+CGMI, Request Manufacturer ID</i> .....	15
3.1.2	<i>+GMI, Request Manufacturer ID</i> .....	15
3.1.3	<i>+CGMM, Request Model ID</i> .....	16
3.1.4	<i>+GMM, Request Model ID</i> .....	17
3.1.5	<i>+CGMR, Request Revision</i> .....	18
3.1.6	<i>+GMR, Request Revision</i> .....	18
3.1.7	<i>+CGSN, Request Product Serial Number Identification</i> .....	19
3.1.8	<i>+GSN, Request Product Serial Number Identification</i> .....	20
3.1.9	<i>+CFSN, Request Factory Serial Number</i> .....	21
3.1.10	<i>+CIMI, Request IMSI</i> .....	22
3.1.11	<i>+CCID, Request Integrate Circuit Card Identity</i> .....	23
3.1.12	<i>+GTUSIM, Checks for USIM Card</i> .....	24
3.1.13	<i>+CLAC, List of All Available AT Commands</i> .....	24
<b>4</b>	<b>Modem Control and Status</b> .....	<b>25</b>
4.1	Modem control Commands .....	25
4.1.1	<i>V, Modem Response Format</i> .....	25
4.1.2	<i>Q, Result Code Suppression</i> .....	27
4.1.3	<i>E, Command Echo</i> .....	27
4.1.4	<i>X, Result Code Selection and Call Progress Monitoring Control</i> .....	28

4.1.5	S, Bit Map Registers .....	30
4.1.6	+WRIM, RI signal width setting .....	31
4.1.7	+GPIO, Set and Read GPIO .....	32
4.1.8	+MMAD, Get Current ADC Channel Voltage Level .....	33
4.1.9	+CBC, Battery Charger Connection .....	34
4.1.10	+MTSM, Temperature Sensor Measurement .....	35
4.1.11	+MSMPD, Enable/Disable SIM card hot plug .....	36
4.1.12	+CMUX, MUX Start up Command .....	37
4.1.13	+ICF, DTE DCE Character Framing .....	39
4.1.14	+CPWROFF, Switch off MS .....	40
4.1.15	+CFUN, Set Phone Functionality .....	40
4.1.16	+MSTART, Start message notification .....	42
4.1.17	+CLK26M, 26MHz Clock Output From CLK26M .....	43
4.2	Sleep Mode Command .....	43
4.2.1	S24, Set the Time of Enter Sleep Mode .....	43
4.2.2	+GTWAKE, Enable waking up host function .....	44
4.2.3	+GTLPMODE, Set Wake up And Sleep Mode .....	45
4.2.4	+GTPMTIME, Delay time for send data .....	46
<b>5</b>	<b>Call Control .....</b>	<b>47</b>
5.1	Voice Call Control AT Commands .....	47
5.1.1	+GTECC, Write Emergency Number .....	47
5.1.2	D, Dial Command .....	48
5.1.3	H, Hang-up Call .....	50
5.1.4	A, Answer Incoming Call .....	50
5.1.5	+CRC, Cellular Result Codes and RING, +CRING - Incoming Call Indication .....	51
5.1.6	+CLIP, Calling Line Identification .....	53
5.1.7	+CLIR, Calling Line Identification Restriction .....	55
5.1.8	+CMOD, Call Mode .....	56
5.1.9	+CHUP, Hang Up Call .....	57
5.1.10	+MHUP, Module Hung UP call .....	58
5.1.11	+MDC, Selection of Desired Message to Be Displayed Upon Connection of a Voice Call	60
5.1.12	+CBST, Select Bearer Service Type .....	61
5.1.13	+FCLASS, Service Class Selection and Identification .....	62

5.1.14	+CSTA, Select Type of Address.....	63
5.2	Call Status Messages.....	64
5.2.1	+CPAS, Phone Activity Status .....	64
5.2.2	+CLCC, List Current Calls .....	65
5.2.3	+CR, Service Reporting Control.....	67
5.2.4	+CAVIMS, Disable/Enable VOLTE.....	68
<b>6</b>	<b>System Date and Time Access Commands.....</b>	<b>69</b>
6.1	General command.....	69
6.1.1	+CCLK, Read/Set System Date and Time .....	69
6.1.2	+CTZU, Automatic Time Zone Update.....	70
6.1.3	+CTZR, Time Zone Reporting.....	71
<b>7</b>	<b>SMS.....</b>	<b>72</b>
7.1	SMS Commands .....	72
7.1.1	+CSCS, Select Terminal Character Set .....	72
7.1.2	+CSMS, Select Message Service .....	73
7.1.3	+CPMS, Preferred Message Storage .....	74
7.1.4	+CMGF, Message Format.....	76
7.1.5	+CSCA, Service Center Address .....	77
7.1.6	+CSMP, Set Text Mode Parameters .....	78
7.1.7	+CSDH, Show Text Mode Parameters .....	80
7.1.8	+CNMI, New Message Indications to Terminal .....	80
7.1.9	+CNMA, New Message Acknowledgment .....	84
7.1.10	+CMGL, List Messages .....	85
7.1.11	+CMGR, Read Message.....	88
7.1.12	+CMSS, Send Message from Storage.....	90
7.1.13	+CMGW, Write Message to Memory .....	91
7.1.14	+CMGD, Delete Message.....	92
7.1.15	+CGSMS, Select Service for MO SMS Messages.....	93
7.1.16	+CMGS, Send SMS to Network.....	94
7.1.17	+CSCB, Cell Broadcast Messages .....	95
7.1.18	+SMMFULL, Set Unsolicited Response (SMS Storage Space Full) .....	96
<b>8</b>	<b>Access and security .....</b>	<b>97</b>
8.1	Commands .....	97
8.1.1	A/, Repeat Last Command.....	97

8.1.2	AT, Check AT Communication.....	98
8.1.3	+CPIN, Enter PIN for Unlocking SIM or Enter PUK for Unlocking SIM.....	98
8.1.4	+TPIN, Query Number of Remaining SIM PIN/PUK Entering Attempts.....	100
8.1.5	+CPWD, Change Password.....	101
8.1.6	+CLCK, Facility Lock.....	103
8.1.7	+CPINR, Remaining PIN Retries.....	105
8.1.8	+CSIM, Generic SIM Access.....	106
8.1.9	+CRSM, Restricted SIM Access.....	107
<b>9</b>	<b>Network.....</b>	<b>109</b>
9.1	Network Commands.....	109
9.1.1	+CSQ, Signal Strength.....	109
9.1.2	+CESQ, Extended Signal Quality.....	110
9.1.3	+CRLP, Radio Link Protocol.....	112
9.1.4	+CREG, Network Registration Status.....	113
9.1.5	+CGREG, GPRS Network Registration.....	116
9.1.6	+CEREG, EPS Network Registration status.....	118
9.1.7	+COPS, Operator Selection.....	120
9.1.8	+CPLS, Selection of Preferred PLMN List.....	123
9.1.9	+CPOL, Preferred Operators.....	123
9.1.10	+GTRAT, Selection of Radio Access Technology.....	125
9.1.11	+GTACT, Select RAT and BAND.....	126
9.1.12	+GTCELLLOCK, Configure Cell lock information.....	129
9.1.13	+GTCCINFO, Get Cell Current Information.....	130
9.1.14	+COPN, Read Operator Names.....	137
9.1.15	+CEMODE, UE modes of operation for EPS.....	138
9.1.16	+MCELL, Module Cell Description.....	138
9.1.17	+MCELL Indication.....	140
<b>10</b>	<b>Hardware Information.....</b>	<b>142</b>
10.1	UART Parameter Commands.....	142
10.1.1	+IPR, Fixed DTE Rate.....	142
10.1.2	+CBAUD, Baud Rate Regulation.....	143
10.1.3	&K, RTS/CTS Flow Control.....	145
10.1.4	+IFC, RTS/CTS Flow Control.....	146
10.1.5	&C, Circuit 109 Behavior.....	147

10.1.6	&D, Circuit 108 (Data Terminal Ready) behaviour .....	148
<b>11</b>	<b>GPRS.....</b>	<b>149</b>
11.1	GPRS Functionality .....	149
11.2	GPRS Commands.....	150
11.2.1	+CGCLASS, GPRS Mobile Station Class.....	150
11.2.2	+CGDCONT, Define PDP Context .....	152
11.2.3	+CGQMIN, Quality of Service Profile (Min Acceptable) .....	155
11.2.4	+CGQREQ, Quality of Service Profile (Requested) .....	156
11.2.5	+CGATT, Packet Domain Attach or Detach .....	157
11.2.6	D*99, Request GPRS Service "D" .....	158
11.2.7	+CGACT, PDP Context Activate or Deactivate .....	160
11.2.8	+CGPADDR, GPRS Addresses .....	162
11.2.9	+GTDNS, Request DNS Addresses .....	163
11.2.10	+CGCMOD, PDP Context Modify.....	164
11.2.11	+CGDATA, Enter Data State .....	164
11.2.12	+MGAUTH, Set type of authentication.....	165
11.2.13	+CGEQOS, Define EPS Quality Of Service .....	167
<b>12</b>	<b>Fibocom Proprietary Commands .....</b>	<b>168</b>
12.1	Set Profile Commands .....	168
12.1.1	+GTUSBMODE, Set USB Configuration Profile .....	168
12.1.2	+GTRNDIS, RNDIS Configuration .....	170
<b>13</b>	<b>Error Handling and Error Code.....</b>	<b>171</b>
13.1	Error Handling Commands.....	171
13.1.1	+CMEE, Report Mobile Equipment Error .....	171
13.1.2	+CEER, Extended Error Report.....	172
13.2	CME Error .....	174
13.3	CMS Error .....	177

# 1 Preface

## 1.1 Manual Scope

This manual introduces the AT commands set of Fibocom family products, and describes how the users can communicate with the devices using these commands. It describes the specification of syntax and parameters of the listed AT commands.

## 1.2 Target Audience

This manual is intended for the developers who need to communicate with the Fibocom family devices using the AT commands.

# 2 Introduction to AT Commands

## 2.1 AT Commands Overview

AT commands are sets of commands used for communication with the cellular modem. AT commands are comprised of assemblies of ASCII characters which start with the "AT" prefix (except the commands A/ and +++). The AT prefix is derived from the word Attention, which asks the modem to pay attention to the current request (command).

AT commands are used to request services from the cellular modem, such as:

- ◆ Call services: dial, answer and hang up
- ◆ Cellular utilities: send/receive SMS
- ◆ Modem profiles: Auto Answer
- ◆ Cellular Network queries: GSM signal quality

## 2.2 General System Abbreviations

The basic system configuration contains a modem and a terminal.

The Fibocom family is the modem unit and may be referred to as the DCE or TA, such as the phone, the mobile or the radio.

The terminal (PC or MCU) may be referred to as the DTE or the TE.


## 2.3 AT Commands Protocol

The AT commands interface is basically a Modem Services upon Request.

Communication (almost) always begins from the TE side. This means that any service should be requested from the TE. Thus a request is called a "Command".

Each command must be answered by a "Results code" from the TA. The results code reports the command status to the TE. Some commands may include several "Results code" to send data back to the TE. Some commands may initiate a mode in which, when specified events are generated in the modem, "Indicator" messages are sent data asynchronously. The "indicators" can be called "Unsolicited results code".

The Modem can echo characters received from the TE (commands) back to the TE.

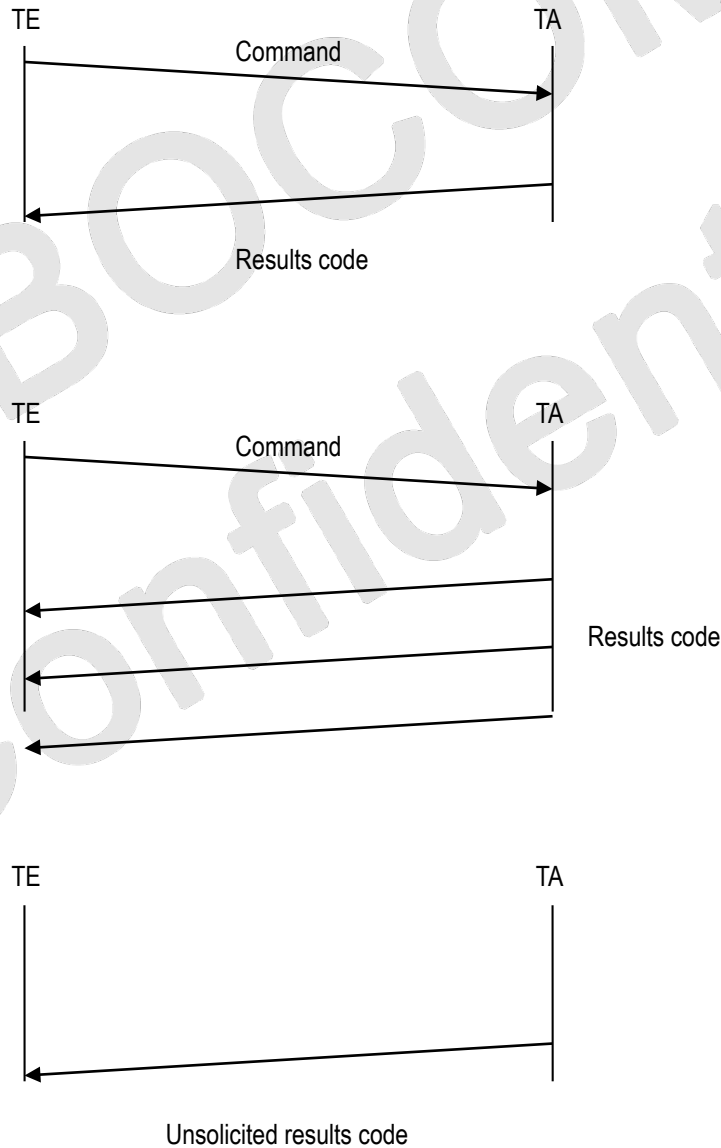

## 2.4 AT Commands Structure

### 2.4.1 General Symbols Used in AT Commands Description

The following syntax definitions apply in this chapter:

Syntax	Definition
<CR>	Carriage returns character, specified by the value of the S3-register.
<LF>	Line-feed character, specified by the value of the S4-register.
<...>	Name enclosed in angle brackets is a syntax element. The brackets themselves do not appear in the command line.
[...]	Optional sub-parameter of a command or an optional part of terminal information response, enclosed in square brackets. The brackets themselves do not appear in the command line. When the sub-parameter is not provided in the parameter type commands, the new value equals its previous value. In action type commands, the action should be performed on the basis of the recommended default setting of the sub-parameter.
//	Denotes a comment, and should not be included in the command.

### 2.4.2 Command Structure

Each AT command has the "AT" or "at" prefix string (except the commands A/ and +++).

Each AT command has the suffix <CR> (except the commands A/ and +++).

Example:

```
AT+CSQ<CR>
```

```
ATS24?<CR>
```

An AT command line may contain one or more commands. Delimiters are used to separate the commands from each other. The delimiter is either a semicolon ";" or none, meaning space (basic commands).

Example:

```
ATS0=1V1Q0E0<CR>
```

```
AT+IFC=0,0;+ICF=3,4;+CNMI=2,1,0,0,0<CR>
```

### 2.4.3 Results Code Structure

By default, the Modem responds with verbose response codes. The results code prefix is <CR><LF>. The results code suffix is <CR><LF>.

Example:

```
<CR><LF>+CSQ: 99,99<CR><LF>
<CR><LF>OK<CR><LF>
```

The unsolicited results code is same as the Results code.



**Note:**

- The <CR> and <LF> characters are not explicitly presented in the response format in this document.
- To reduce the print length, the empty line in actual response may be removed in the examples.

## 2.5 Command Syntax

<b>Execute command syntax</b>	AT+xxx ATxxx ATxxx;
<b>Parameter set command syntax</b>	AT+xxx=<Value> ATxxx=<Value>
<b>Parameter read Command syntax</b>	AT+xxx? ATxxx?
<b>Parameter test Command syntax</b>	AT+xxx=? ATxxx=?

<Value> consists of either a numeric constant or a string constant. <compound\_value> consist of several <value> parameters separated by commas.

Example of compound\_value: <value1>, <value2>, ..., <valueN>

◆ **Numeric Constants**

Numeric constants are expressed in decimal, hexadecimal, or binary form. In the Modem, the definition of each command specifies which form is used for values associated with that command.

◆ **String Constants**

String constants consist of a sequence of characters, bounded at the beginning and end by the double-quote character (").

## 3 Modem Information

These commands allow user to query the type of device that is attached, the technology used in the device, as well as basic operating information about the modem unit.

### 3.1 General information

#### 3.1.1 +CGMI, Request Manufacturer ID

##### Description

This command displays the manufacturer identification. The modem unit outputs a string containing manufacturer identification information

##### Syntax

Command	Possible Response(s)
+CGMI	<manufacturer> OK
+CGMI?	+CGMI: "<manufacturer>" OK
+CGMI=?	OK

##### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

##### Defined Values

<manufacturer>: One or more lines of information text related to the manufacturer.

#### 3.1.2 +GMI, Request Manufacturer ID

##### Description

This command displays manufacturer identification. The modem unit outputs a string containing manufacturer identification information.

## Syntax

Command	Possible Response(s)
+GMI	<manufacturer> OK
+GMI?	+GMI: "<manufacturer>" OK
+GMI=?	OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<manufacturer>: One or more lines of information text related to the manufacturer.

### 3.1.3 +CGMM, Request Model ID

#### Description

This command requests the model identification. The modem outputs a string containing information about the specific model, including a list of the supported technology used, and the particular model number.

#### Syntax

Command	Possible Response(s)
+CGMM	<model> OK
+CGMM?	+CGMM: "<model>","<modelabbrev>" OK
+CGMM=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<model>: Information text related to the model identification.

<modelabbrev>: Short name related to the model identification.

## 3.1.4 +GMM, Request Model ID

### Description

This command requests the model identification. The modem outputs a string containing information about the specific model, including a list of the supported technology used, and the particular model number.

### Syntax

Command	Possible Response(s)
+GMM	<model> OK
+GMM?	+GMM: "<model>","<model abbrev>" OK
+GMM=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<model>: Information text related to the model identification.

<model abbrev>: Short name related to the model identification.

### 3.1.5 +CGMR, Request Revision

#### Description

This command requests the revision identification. The modem outputs a string containing the revision identification information of the software running in the device.

#### Syntax

Command	Possible Response(s)
+CGMR	<revision> OK
+CGMR?	+CGMR: "<revision>" OK
+CGMR=?	OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

#### Defined Values

<revision>: One or more lines of information text related to the software revision.

### 3.1.6 +GMR, Request Revision

#### Description

These commands request the revision identification. The modem outputs a string containing the revision identification information of the software version contained within the device.

#### Syntax

Command	Possible Response(s)
+GMR	<revision> OK
+GMR?	+GMR: "<revision>"

Command	Possible Response(s)
	OK
+GMR=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<revision>: One or more lines of information text related to the software revision.

## 3.1.7 +CGSN, Request Product Serial Number Identification

### Description

This command displays the product serial number identification IMEI (International Mobile Equipment Identification). It can be used even when the SIM card is not inserted.

### Syntax

Command	Possible Response(s)
+CGSN[=<snt>]	<p><b>When &lt;snt&gt;=0 (or omitted) and command successful:</b></p> <p>&lt;imei&gt;</p> <p><b>When &lt;snt&gt;=1 and command successful:</b></p> <p>+CGSN: &lt;imei&gt;</p> <p><b>When &lt;snt&gt;=2 and command successful:</b></p> <p>+CGSN: &lt;imeisv&gt;</p> <p><b>When &lt;snt&gt;=3 and command successful:</b></p> <p>+CGSN: &lt;svn&gt;</p> <p><b>or</b></p> <p>+CME ERROR: &lt;err&gt;</p>
+CGSN?	+CGSN: "<imei>" OK
+CGSN=?	<p><b>When TE supports &lt;snt&gt; and command successful:</b></p> <p>+CGSN: (list of supported &lt;snt&gt;s)</p>

Command	Possible Response(s)
	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<snt>: integer type indicating the serial number type that has been requested.

0 returns the IMEI (International Mobile Station Equipment Identity)

1 returns the IMEI (International Mobile Station Equipment Identity)

2 returns the IMEISV (International Mobile Station Equipment Identity and Software Version number)

3 returns the SVN (Software Version Number)

<imei>: Decimal format indicating the IMEI; IMEI is composed of Type Allocation Code (TAC) (8 digits), Serial Number (SNR) (6 digits) and the Check Digit (CD) (1 digit). Character set used in <imei> is as specified by command Select TE Character Set +CSCS.

<imeisv>: Decimal format indicating the IMEISV; The 16 digits of IMEISV are composed of Type Allocation Code (TAC) (8 digits), Serial Number (SNR) (6 digits) and the software version (SVN) (2 digits).

<svn>: Decimal format indicating the current SVN which is a part of IMEISV; This allows identifying different software versions of a given mobile.

## 3.1.8 +GSN, Request Product Serial Number Identification

### Description

This command displays the product serial number identification IMEI (International Mobile Equipment Identification). It can be used even when the SIM card is not inserted.

### Syntax

Command	Possible Response(s)
+GSN[=<snt>]	<p><b>When &lt;snt&gt;=0 (or omitted) and command successful:</b></p> <p>&lt;imei&gt;</p> <p><b>When &lt;snt&gt;=1 and command successful:</b></p> <p>+GSN: &lt;imei&gt;</p> <p><b>When &lt;snt&gt;=2 and command successful:</b></p> <p>+GSN: &lt;imeisv&gt;</p> <p><b>When &lt;snt&gt;=3 and command successful:</b></p>

Command	Possible Response(s)
	+GSN: <svn>  or +CME ERROR: <err>
+GSN?	+GSN: "<imei>"  OK
+GSN=?	<b>When TE supports &lt;snt&gt; and command successful:</b>  +GSN: (list of supported <snt>s)  OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<snt>: integer type indicating the serial number type that has been requested.

- 0 returns the IMEI (International Mobile Station Equipment Identity)
- 1 returns the IMEI (International Mobile Station Equipment Identity)
- 2 returns the IMEISV (International Mobile Station Equipment Identity and Software Version number)
- 3 returns the SVN (Software Version Number)

<imei>: Decimal format indicating the IMEI; IMEI is composed of Type Allocation Code (TAC) (8 digits), Serial Number (SNR) (6 digits) and the Check Digit (CD) (1 digit). Character set used in <imei> is as specified by command Select TE Character Set +CSCS.

<imeisv>: Decimal format indicating the IMEISV; The 16 digits of IMEISV are composed of Type Allocation Code (TAC) (8 digits), Serial Number (SNR) (6 digits) and the software version (SVN) (2 digits).

<svn>: Decimal format indicating the current SVN which is a part of IMEISV; This allows identifying different software versions of a given mobile.

## 3.1.9 +CFSN, Request Factory Serial Number

### Description

This command is used to read the factory serial number.

### Syntax

Command	Possible Response(s)
+CFSN	+CFSN: <FSN>  OK

Command	Possible Response(s)
	or ERROR
+CFSN?	+CFSN: <FSN> OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	Yes	< 1s

### Defined Values

<FSN>: string type with 10-char string that can be <A-Z> or <0-9> characters or both; e.g. "1234567890"

### 3.1.10 +CIMI, Request IMSI

#### Description

This command displays the International Mobile Subscriber Identity number.

#### Syntax

Command	Possible Response(s)
+CIMI	<IMSI> OK or ERROR
+CIMI?	+CIMI: <IMSI> OK or ERROR

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

## Defined Values

<IMSI>: string type; International Mobile Subscriber Identity (string without double quotes); e.g. 314566320021400

### 3.1.11 +CCID, Request Integrate Circuit Card Identity

#### Description

This command returns the card identification number in SIM (SIM file EFICCID, see GSM 11.11 Chap.10.1.1) as string type.

#### Syntax

Command	Possible Response(s)
+CCID	+CCID: <ID> OK or ERROR
+CCID?	+CCID: <ID> OK or ERROR
+CCID=?	OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<ID>: string type; Integrate Circuit Card Identity (string without double quotes); e.g. 89860018190839008096

### 3.1.12 +GTUSIM, Checks for USIM Card

#### Description

This command is used to check what the type of currently used SIM card is.

#### Syntax

Command	Possible Response(s)
+GTUSIM	+GTUSIM: <state> OK or ERROR
+GTUSIM?	+GTUSIM: <state> OK or ERROR

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

#### Defined Values

<state>: integer type

- 0 SIM (For GSM)
- 1 USIM (For WCDMA and TD-SCDMA and LTE)

### 3.1.13 +CLAC, List of All Available AT Commands

#### Description

This command prints out all AT Commands supported by the Modem.

#### Syntax

Command	Possible Response(s)
+CLAC	<ATx> OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 2s

## Defined Values

<ATx>: Available AT commands; e.g. ATS or ATD or ATA and so on

# 4 Modem Control and Status

## 4.1 Modem control Commands

The modem holds certain data items in selected memory space, named Software Registers (S-registers) and Modem Registers. Some of these registers are used as bitmaps, where one register holds more than one data item. All S-registers can be accessed using the S command, described in "S, Bit Map Registers". Some registers can also be accessed using dedicated commands, detailed below.

### 4.1.1 V, Modem Response Format

#### Description

This command determines the response format of the data adapter and the contents of the header and trailer transmitted with the result codes and information responses. This command also determines whether the result codes are transmitted in a numeric or an alphabetic ("verbose") form. The text portion of information responses is not affected by this setting.

The following table shows the effect that setting this parameter has on the format of information text and result codes.

#### Syntax

Command	Possible Response(s)
ATV[<value>]	<b>If &lt;value&gt;=0:</b> <numeric code> or

Command	Possible Response(s)
	If <value>=1 or without parameter: <verbose code>

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<value>: integer type

0 Transmits limited headers and trailers, and numeric text.

1 Transmits full headers and trailers, and verbose response text. Default value.

<numeric code>: integer type

0 OK

1 CONNECT

2 RING

3 NO CARRIER

4 ERROR

5 RESERVED

6 NO DIALTONE

7 BUSY

8 NO ANSWER

<verbose code>: string type; And supported verbose code as below:

OK

CONNECT

RING

NO CARRIER

ERROR

RESERVED

NO DIALTONE

BUSY

NO ANSWER

## 4.1.2 Q, Result Code Suppression

### Description

This command determines whether to output the result codes. Information text transmitted in response to commands is not affected by the setting of this parameter.

### Syntax

Command	Possible Response(s)
ATQ[<value>]	OK or +CME ERROR: <err> or No result return if <value>=1

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<value>: integer type

- 0 Transmit result codes. Default value.
- 1 Suppress result codes.

## 4.1.3 E, Command Echo

### Description

This command defines whether input characters are echoed to output. If so, these characters are echoed at the same rate, parity and format at which they were received.

### Syntax

Command	Possible Response(s)
ATE<n>	OK

Command	Possible Response(s)
	or +CME ERROR: <err>
ATE?	<value> OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<n>: integer type

0 Does not echo characters

1 Echoes characters

<value>: integer type

000 Does not echo characters

001 Echoes characters; Default value



**Note:**

if without parameter, it means <value>=0.

## 4.1.4 X, Result Code Selection and Call Progress Monitoring Control

### Description

This command defines the CONNECT result code format. It determines whether or not the Modem transmits particular result codes to the user. It also controls whether the Modem verifies the presence of dial tone when it first goes off-hook to begin dialing, and whether the engaged tone (busy signal) detection is enabled.

### Syntax

Command	Possible Response(s)
ATX<n>	OK or

Command	Possible Response(s)
	+CME ERROR: <err>
ATX?	<value> OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<n>: integer type;

- 0 CONNECT result code given upon entering online data state:
  - Dial tone detection - Disabled
  - Busy detection - Disabled
- 1 CONNECT <text> result code given upon entering online data state:
  - Dial tone detection - Disabled
  - Busy detection - Disabled
- 2 CONNECT <text> result code given upon entering online data state:
  - Dial tone detection - Enabled
  - Busy detection - Disabled
- 3 CONNECT<text> result code given upon entering online data state:
  - Dial tone detection - Disabled
  - Busy detection - Enabled
- 4 CONNECT <text> result code given upon entering online data state; Default value.
  - Dial tone detection - Enabled
  - Busy detection – Enabled

<value>: integer type;

- 000 CONNECT result code given upon entering online data state:
  - Dial tone detection - Disabled
  - Busy detection - Disabled
- 001 CONNECT <text> result code given upon entering online data state:
  - Dial tone detection - Disabled
  - Busy detection - Disabled

002 CONNECT <text> result code given upon entering online data state:

Dial tone detection - Enabled

Busy detection - Disabled

003 CONNECT<text> result code given upon entering online data state:

Dial tone detection - Disabled

Busy detection - Enabled

004 CONNECT<text> result code given upon entering online data state; Default value.

Dial tone detection - Enabled

Busy detection – Enabled

<text>: string type and it is manufacturer-specific text that may specify DTE speed, line speed, error control, data compression, or other status

### 4.1.5 S, Bit Map Registers

#### Description

This command reads/writes values of the S-registers. The Modem supports this command for various S values, according to official specifications (ITU-I, ETSI, or manufacturer specific).

#### Syntax

Command	Possible Response(s)
ATS<n>=<value>	OK or +CME ERROR: <err>
ATS<n>?	current <value> of S-register n OK or +CME ERROR: <err>

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

The following table shows the different S-registers and their associated values

<n>	Description	Min	Max	Default
0	Sets/gets number of rings before auto answer.	000	255	000
3	Sets/gets carriage return code character.	000	31	013
4	Sets/gets line feed code character.	000	31	010
5	Sets/gets command line editing character (Default 8=<Backspace>).	000	31	008
24	Sets/get the duration of inactivity (in units of second) to put the UART into sleep state (zero means disable the sleep for UART)	000	255	000



### Note:

- Default value 000 means disabled.
- For ATS0, the duration time to perform expected ring should be not over the allowed time by network

## 4.1.6 +WRIM, RI signal width setting

### Description

This command is used to set the duration time of UART\_RING pulse with low voltage when modem receives a SMS or Call or data.



### Note:

the RI pin will keep on high voltage if there is no incoming SMS or call or data.

### Syntax

Command	Possible Response(s)
AT+WRIM=<type>,<duration>	OK or ERROR
AT+WRIM?	+WRIM: <type>,<duration> OK or

Command	Possible Response(s)
	ERROR
AT+WRIM=?	+WRIM: (list of supported <type>s),(list of supported <duration>s) OK or ERROR

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<type>: integer type

- 0 take effect on voice call
- 1 take effect on SMS
- 2 take effect on TCP/IP Data

<duration>: integer type; Default value is 0

- 0 means default setting: < type>,<duration> as (0,1000) and (1,150) and (2,0)
- 1 to 2000 1~2000ms

## 4.1.7 +GPIO, Set and Read GPIO

### Description

This command intends to configure supported GPIO pins and gets value from output pin. Modem support 1 GPIO pins. All these pins can be set to output and input mode. The default configuration is input, but it's better to set direction before use. The high voltage level is 1.8V/3.3V.

### Syntax

Command	Possible Response(s)
AT+GPIO=<pin>,<direct>[,<value>]	When <direct> is 1: OK

Command	Possible Response(s)
	When <direct> is 2: <value> is omitted +GPIO: value OK or +CME ERROR: <err>
AT+GPIO?	OK
AT+GPIO=?	+GPIO: <pin>,<direct>,<value> OK or ERROR

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<pin>: integer type;

**Note: Use AT+GPIO=? to know about the supported pin before setting pin value.**

<direct>: integer type;

- 1 Output
- 2 Query output value of the single pin

<value>: integer type;

- 0 Low level
- 1 High level

## 4.1.8 +MMAD, Get Current ADC Channel Voltage Level

### Description

This command is used to obtain the voltage value of the current ADC channel.

## Syntax

Command	Possible Response(s)
AT+MMAD	+MMAD: <index>[,<Voltage>][,<index>,<Voltage>]  OK
AT+MMAD?	+MMAD: <index>[,<Voltage>][,<index>,<Voltage>]  OK
AT+MMAD=?	+MMAD: (range of <index>),(range of <Voltage>)  OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<index>: integer type; Determined by the ADC channel set by the hardware design.

<Voltage>: integer type; The voltage value of the load above the current ADC channel, the unit is mV.



### Note:

After exec this command, please reset the modem. Because this command affects the normal function of the ADC.

## 4.1.9 +CBC, Battery Charger Connection

### Description

This command intends to query the battery voltage level.

### Syntax

Command	Possible Response(s)
AT+CBC	+CBC: <bcs>,<bcl>  OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<bc>: integer type

0 MT is powered by the battery (default)

<bcl>: integer type; Voltage with mV

## 4.1.10 +MTSM, Temperature Sensor Measurement

### Description

This command measures the current temperature sensor value in Celsius degrees.

This temperature is taken from a thermistor internally.



**Note:**

All the parameters restore to default values when Modem restart and the default value is 0.

### Syntax

Command	Possible Response(s)
AT+MTSM=<Report>[,<Rate>]	<p><b>If &lt;Report&gt;=0</b></p> <p>OK</p> <p><b>If &lt;Report&gt;=1</b></p> <p>+MTSM: &lt;Temp&gt;</p> <p>OK</p> <p><b>If &lt;Report&gt;=2</b></p> <p>OK</p> <p>+MTSM: &lt;Temp&gt;</p> <p>...</p>

Command	Possible Response(s)
	+MTSM: <Temp>  or +CME ERROR: <err>
AT+MTSM?	+MTSM: <Report>[,<Rate>]  OK
AT+MTSM=?	+MTSM: (range of <Report>),(range of <Rate>)  OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<Report>: integer type;

- 0 Deactivate unsolicited report.
- 1 Report once the current temperature.
- 2 Activate unsolicited report.

<Rate>: integer type and range 1-255; Select the time interval in seconds between the unsolicited reports.

And default value: 1

## 4.1.11 +MSMPD, Enable/Disable SIM card hot plug

### Description

This command can Enable/Disable SIM card hot plug feature. The default status is disable this feature.

The parameter will be saved in NVM and can restore at power cycle.

### Syntax

Command	Possible Response(s)
AT+MSMPD=<status>	OK  or

Command	Possible Response(s)
	+CME ERROR: <err>
AT+MSMPD?	+MSMPD: <status> OK
AT+MSMPD=?	+MSMPD: (list of supported <status>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	No	< 1s

### Defined Values

<status>: integer type;

- 0 Disable the SIM card hot plug feature. Default value.
- 1 Enable the SIM card hot plug feature.

## 4.1.12 +CMUX, MUX Start up Command

### Description

This command is used to start the GSM MUX multiplexing protocol stack. When the Modem received a valid +CMUX command, it returns OK and changes its state to MUX-Init. If the parameters are left out, the default value is used.

### Syntax

Command	Possible Response(s)
AT+CMUX=<mode>[,<subset>[,<port_speed>[,<N1>[,<T1>[,<N2>[,<T2>[,<T3>[,<k>]]]]]]]]	OK or +CME ERROR: <err>
AT+CMUX?	+CMUX: <mode>[,<subset>[,<port_speed>[,<N1>[,<T1>[,<N2>[,<T2>[,<T3>[,<k>]]]]]]]]

Command	Possible Response(s)
	OK or +CME ERROR: <err>
AT+CMUX=?	+CMUX: (list of supported <mode>s),(list of supported<subset>s),[(list of supported <port_speed>s)],(list of supported <N1>s),(list of supported <T1>s),(list of supported <N2>s),(list of supported <T2>s),(list of supported <T3>s),(list of supported <k>s)

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<mode>: integer type; MUX mode:

- 0 Basic
- 1 Advanced

<subset>: integer type; Defines how the MUX control channel is set up. The virtual channel is set up according to this setting.

- 0 UIH frames used only

<port\_speed>: integer type;

- 1 9600 bit/sec
- 2 19200 bit/sec
- 3 38400 bit/sec
- 4 57600 bit/sec
- 5 115200 bit/sec(default)
- 6 230400 bit/sec

<N1>: integer type and range 1-1509; Maximum frame size. Default value is 31 in Basic mode.

<T1>: integer type and range 1-255; Acknowledgement timer (in units of 10ms). Default value is 10

<N2>: integer type and range 0-100; Maximum number of re-transmissions. Default value is 3.

<T2>: integer type and range 2-255; Response timer for the DLC0 (in unit of 10ms). Default value is 30

**Note:**<T2> must be longer than <T1>.

<T3>: integer type and range 1-255; Wake up response timer (in seconds). Default value is 10.

<k>: integer type and range 1-7; Window size, for Advanced option with Error-Recovery Mode. Default value is 2.

### 4.1.13 +ICF, DTE DCE Character Framing

#### Description

This extended-format compound parameter is used to determine the local serial port start-stop(asynchronous) character framing that the DCE shall use while accepting DTE commands and while transmitting information text and result code, if this is not automatically determined.

#### Syntax

Command	Possible Response(s)
AT+ICF=[<format>[,<parity>]]	
AT+ICF?	+ICF: <format>,<parity>
AT+ICF=?	+ICF: (list of supported <format> values),(list of supported <parity> values)

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

#### Defined Values

<format>: integer type; determines the number of bits in the data bits, the presence of a parity bit, and the number of stop bits in the start-stop frame.

- 1 8 data, 2 stop
- 2 8 data, 1 parity, 1 stop
- 3 8 data, 1 stop

<parity>: determines how the parity bit is generated and checked, if present (when format is 2 or 5)

- 0 Odd
- 1 Even

### 4.1.14 +CPWROFF, Switch off MS

#### Description

This command is used to switch off the Modem and make detach procedure

#### Syntax

Command	Possible Response(s)
AT+CPWROFF	OK or +CME ERROR: <err>
AT+CPWROFF=?	OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	<2s

### 4.1.15 +CFUN, Set Phone Functionality

#### Description

This command is used to select the level of functionality <fun> in the modem.

#### Syntax

Command	Possible Response(s)
AT+CFUN=<fun>[,<rst>]	OK or +CME ERROR: <err>
AT+CFUN?	+CFUN: <power mode> OK or +CME ERROR: <err>

Command	Possible Response(s)
AT+CFUN=?	+CFUN: (list of supported <fun>s), (list of supported<rst>s) OK or +CME ERROR: <err>

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<fun>: integer type;

- 0 Minimum functionality (Switch off MS and make detach procedure).
- 1 Full functionality. Enable the transmit and receive RF circuits for all supported radio access technologies (Online mode).
- 4 Disable both MT transmit and receive RF circuits (Airplane mode).
- 8 Disable Fetching of proactive Commands.
- 15 Reset

Note 1: <rst> is not supported when <fun> = 15

Note 2: When <fun> value is 0 or 15, the OK response may be missed due to race condition

Note 3: The <fun> value whether is persistent or not depends on the implementation of target products.

<rst>: integer type;

- 0 Do not reset the MT before setting it to <fun> power level
- 1 Reset the MT before setting it to <fun> power level

<power\_mode>: integer type;

- 1 MS is switched on.
- 2 Invalid Mode.
- 4 Airplane Mode.

## 4.1.16 +MSTART, Start message notification

### Description

This command is used to enable/disable module outputting starting message when power up.

### Syntax

Command	Possible Response(s)
AT+MSTART=<at ready>,<sim ready>	OK or ERROR
AT+MSTART?	+MSTART: <at ready>,<sim ready> OK
AT+MSTART=?	+MSTART: (list of supported <at ready>s),(list of supported <sim ready>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	Yes	< 1s

### Defined Values

<at ready>: integer type;

- 0 Do not output "AT command ready" from UART
- 1 Output "AT command ready" from UART (default value)

<sim ready>: integer type;

- 0 Do not output "+SIM READY" after phonebook initialize completely
- 1 Output "+SIM READY" after phonebook initialize completely (default value)

### Note:

"AT command ready" is not allowed to be output from USB port even if set to 1. "+SIM READY" can output from UART and USB port according to setting.

## 4.1.17 +CLK26M, 26MHz Clock Output From CLK26M

### Description

This command is used to control the 26MHz clock output from CLK26M.

### Syntax

Command	Possible Response(s)
AT+CLK26M=<n>	OK or +CME ERROR: <err>
AT+CLK26M?	OK
AT+CLK26M=?	+CLK26M: (list of supported <n>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<n>: integer type

- 0 disable 26MHz clock output. Default value.
- 1 enable 26MHz clock output.

## 4.2 Sleep Mode Command

### 4.2.1 S24, Set the Time of Enter Sleep Mode

#### Description

This command is used to set the time of the module enter sleep mode.

Note: This command is applicable when not allow UART automatically go into sleep mode, or else it will return error.

### Syntax

Command	Possible Response(s)
ATS24=<value>	OK or ERROR
ATS24?	<value> OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<value>: integer type and in seconds

000      Disable the module enters sleep mode. Default value; the max value is 255

Other value      Enable the module enter sleep mode after a specified time.

## 4.2.2 +GTWAKE, Enable waking up host function

### Description

This command is used to enable or disable wake up host function.

### Syntax

Command	Possible Response(s)
AT+GTWAKE=<mode>[,<sub_mode>]	OK or ERROR
AT+GTWAKE?	+GTWAKE: <mode>[,<sub_mode>] OK
AT+GTWAKE=?	+GTWAKE: (list of supported <mode>s),(list of

Command	Possible Response(s)
	supported<sub_mode>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<mode>: integer type

- 0 Disable waking up host function. Default value.
- 1 Enable waking up host function via WAKEUP\_HOST pin
- 2 Enable waking up host function via UART RI pin

<sub\_mode>: integer type

- 0 Module set WAKEUP\_HOST/RI pin to high level when want host wake up. Default value.
- 1 Module set WAKEUP\_HOST/RI pin to low level when want host wake up.
- 2 Module set WAKEUP\_HOST pina 100ms pulse signal when want host wake up.  
(RI pulse signal, according to WRIM define)

## 4.2.3 +GTLPMODE, Set Wake up And Sleep Mode

### Description

This command controls the module how to enter sleep or wake up from sleep.

### Syntax

Command	Response/Action
+GTLPMODE=<main_mode>[,<sub_mode>]	OK or +CME ERROR: <err>
+GTLPMODE?	+GTLPMODE: <main_mode>[,<sub_mode>]

Command	Response/Action
	OK or +CME ERROR: <err>
+GTLPMODE=?	+GTLPMODE: (list of supported <main_mode>s),(list of supported <sub_mode>s)  OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	Yes	< 1s

### Defined Values

<main\_mode>: integer type and range 0-2;

- 0 Use the command AT24 to control module enter sleep; Default value.
- 1 Control module go into sleep/wakeup mode via WAKEUP pin level only.
- 2 Control module go into sleep/wakeup mode via UART\_DTR pin level only

<sub\_mode>: integer type and range 0-2; It takes effect only when <main\_mode>=1 or 2.

- 0 Module enters sleep mode when WAKEUP/UART\_DTR pin turns to high level, and wake up module in low level. Default value.
- 1 Module enters sleep mode when WAKEUP/UART\_DTR pin turns to low level, and wake up module in high level.
- 2 Module exits sleep mode when WAKEUP/DTR pin has a pulse signal

**Note:** AT24 doesn't take effect when <main\_mode>=1 or 2.

## 4.2.4 +GTPMTIME, Delay time for send data

### Description

This command controls the delay time for send data.

## Syntax

Command	Response/Action
+GTPMTIME=<delay-out>[,<delay-in>[,<sleeptime>]]	OK or +CME ERROR: <err>
+GTPMTIME?	+GTPMTIME: <delay-out>, <delay-in>, <sleeptime>  OK
+GTPMTIME=?	+GTPMTIME: (100-1000), (100-1000), (1000-5000)  OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	Yes	< 1s

## Defined Values

<delay-out>: integer type and range 100-1000ms, default is 200;

Note: Module will wait this delay time for send data after wakeup host signal has been set.

<delay-in>: integer type and range 100-1000ms, default is 200;

Note: Host will wait this delay time for send data after wakeup module signal has been set.

<sleeptime>: integer type and range 1000-5000ms, default is 2000;

Note: The module will go into sleep mode after wakeup by WAKEUP/DTR pin pulse.

# 5 Call Control

## 5.1 Voice Call Control AT Commands

### 5.1.1 +GTECC, Write Emergency Number

#### Description

This command is used to write and read emergency number.

## Syntax

Command	Possible Response(s)
AT+GTECC=<index>,<ecc_num>	OK or +CME ERROR: <err>
AT+GTECC?	[+GTECC: <index1>,<ecc_num>[<CR><LF>+GTECC: <index2>,<ecc_num>][...]] OK or +CME ERROR: <err>
AT+GTECC=?	+GTECC: (list of supported <index>s),<max_ecc_length> OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<index>: integer type and range 1-5; Emergency number index.

<ecc\_num>: string type and the maximum length is 15. Emergency number, e.g. 0 1 2 3 4 5 6 7 8 9 \* #

<max\_ecc\_length>: integer type; The maximum length of <ecc\_num>.

### 5.1.2 D, Dial Command

#### Description

This command makes a DATA/VOICE call on the current network.



#### Note:

If a DATA call was originated and answered by the remote side, a "OK" notification is sent to the terminal from the Modem, and it moves to the online Data state.

For more information about call failure, should use the AT+CEER command

## Syntax

Command	Possible Response(s)
ATD<number>[:;]	<p><b>For Voice call:</b></p> <p>OK</p> <p>OK or CONNECT or Nothing (depend on +MDC setting) is shown once voice call is connected.</p> <p>Note: First OK means successfully executing this command.</p> <p><b>For CSD call:</b></p> <p>OK or CONNECT or Nothing (depend on +MDC setting) is shown once CSD call is connected.</p> <p>If the originated call is failed, returns below causes:</p> <ol style="list-style-type: none"> <li>1. Connection Failure - NO CARRIER or BUSY or NO ANSWER</li> <li>2. General Failure - ERROR</li> <li>3. Security reason (such as SIM not present) - SIM NOT INSERTED</li> <li>4. Unknown reason - UNKNOWN CALLING ERROR</li> </ol>

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 30s

## Defined Values

<number>: Telephone number or Special number(e.g. \*99# or \*99\*\*\*1#)



**Note:**

- number with; at the end is for voice call
- number without; at the end is for data call (CSD call or PS call)

### 5.1.3 H, Hang-up Call

#### Description

This command hangs up call. The Modem terminates all call regardless it is a data or voice call, and whether it is an incoming, originating, waiting, or connected call.

A NO CARRIER message is returned to the terminal after the regular OK approval.

#### Syntax

Command	Possible Response(s)
ATH	OK NO CARRIER

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<30s

#### Defined Values

None

### 5.1.4 A, Answer Incoming Call

#### Description

This command answers an incoming VOICE/DATA call after a RING/+CRING indication is sent to the terminal.

If the incoming call is answered (CSD connected), the Modem sends a CONNECT notification to the terminal.

If the MT call fails, the possible notifications are:

- NO CARRIER - Connection Failure
- ERROR - General Failure

### Syntax

Command	Possible Response(s)
ATA	OK or +CME ERROR: <err>

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<2s

### Defined Values

None

## 5.1.5 +CRC, Cellular Result Codes and RING, +CRING - Incoming Call Indication

### Description

This command controls whether or not to present the extended format of an incoming call indication. The RING/+CRING indication is sent from the Modem to the terminal when the Modem is alerted by an incoming call from the network. Once this indication is sent, information is available on the calling line via +CLIP. When +CRC is disabled, the indication is RING, and when +CRC is enabled, the indication is +CRING.

### Syntax

Command	Possible Response(s)
AT+CRC=<mode>	OK
AT+CRC?	+CRC: <mode> OK
AT+CRC=?	+CRC: (list of supported <mode>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

## Defined Values

<mode>: integer type

0 disables extended format. Default value.

1 enables extended format. When enabled, an incoming call is indicated to the terminal with an unsolicited result code +CRING: <type> instead of the normal RING.

<type>:string type

ASYNC [,<priority>[,<subaddr>,<satype>]] **asynchronous transparent**

SYNC [,<priority>[,<subaddr>,<satype>]] **synchronous transparent**

REL ASYNC [,<priority>[,<subaddr>,<satype>]] **asynchronous non-transparent**

REL SYNC [,<priority>[,<subaddr>,<satype>]] **synchronous non-transparent**

FAX [,<priority>[,<subaddr>,<satype>]] **facsimile (TS 62)**

VOICE [,<priority>[,<subaddr>,<satype>]] **normal voice (TS 11) (see NOTE 2)**

VOICE/VIDEO [,<ccid>[,<priority>[,<subaddr>,<satype>]]] **voice or video call (see NOTE 2)**

VOICE/XXX [,<priority>[,<subaddr>,<satype>]] **voice followed by data (BS 81) (XXX is ASYNC, SYNC, REL ASYNC or REL SYNC)**

ALT VOICE/XXX [,<priority>[,<subaddr>,<satype>]] **alternating voice/data, voice first (BS 61)**

ALT XXX/VOICE [,<priority>[,<subaddr>,<satype>]] **alternating voice/data, data first (BS 61)**

ALT VOICE/FAX [,<priority>[,<subaddr>,<satype>]] **alternating voice/fax, voice first (TS 61)**

ALT FAX/VOICE [,<priority>[,<subaddr>,<satype>]] **alternating voice/fax, fax first (TS 61)**

GPRS <PDP\_type>, <PDP\_addr>[, [<L2P>][,<APN>]] **GPRS network request for PDP context**

### activation

VGC <GCA>, <GId>, <ackflag> [,<priority>] **voice group call (TS 91)**

VBC <GCA>, <GId>, <ackflag> [,<priority>] **voice broadcast call (TS 92)**

NOTE 2: The <type>=VOICE/VIDEO is used for voice and/or video calls. It is implementation specific whether this type will replace the <type>=VOICE or if both the types <type>=VOICE/VIDEO and <type>=VOICE are supported.

<priority>: indicates the eMLPP priority level of the incoming call by paging, notification or setup message.

The priority level values are as defined in eMLPP specification 3GPP TS 22.067 [54].

<subaddr>: string type subaddress of format specified by <satype>

<satype>: type of subaddress octet in integer format (refer 3GPP TS 24.008 subclause 10.5.4.8) or RFC 4715 [122] appendix A.

<ccid>: integer type. Call identification number, see +CLCCS.

<PDP\_type>, <PDP\_addr> and <APN>: string types as defined in the Define PDP Context (+CGDCONT) command.

<L2P>: string type proposes a layer 2 protocol to use between the MT and the TE. It is defined in the Enter GPRS Data Mode (+CGDATA) command. If the MT is unable to announce to the TE the network's request (for example it is in V.250 online data state) the MT shall reject the request. No corresponding unsolicited result code shall be issued when the MT returns to a command state.

<GCA>: string type (consisting of digits only) is a part of the group call reference as specified in 3GPP TS 23.003 [7] and indicates group call area. See the commands +CAJOIN, +CAREJ and +CALCC.

<GId>: string type (consisting of digits only) is a part of the group call reference as specified in 3GPP TS 23.003 [7] and indicates group call identification. See the commands +CAJOIN, +CAREJ and +CALCC.

<ackflag>: integer type proposes that a predefined confirmation procedure is to be used after the call is ended. The value 1 indicates that a predefined confirmation procedure is to be used after the call is ended. The value 0 indicates that no confirmation procedure is required. See the parameter <ack\_flag> of command +CALCC.

## 5.1.6 +CLIP, Calling Line Identification

### Description

This command enables a called subscriber to get the calling line identity (CLI) of the calling party when receiving a mobile terminated call.

Set command enables or disables the presentation of the CLI at the TE. It has no effect on the execution of the supplementary service CLIP in the network.

When <n>=1, the presentation of the calling line identity at the TE is enabled and when the calling subscriber allows, the unsolicited result code

+CLIP: <number>,<type>[,<subaddr>,<satype>[,<alpha>][,<CLI\_validity>]] is returned . It is manufacturer specific if this response is used when normal voice call is answered. The unsolicited result code +CLIP does not support numbers of the SIP URI format.

When <n>=0, the presentation of the calling line identity at the TE with unsolicited result code +CLIP is

disabled.

## Syntax

Command	Possible Response(s)
AT+CLIP=[<n>]	OK or +CME ERROR: <err>
AT+CLIP?	+CLIP: <n>,<m> OK
AT+CLIP=?	+CLIP: (0,1) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

## Defined Values

<n>: integer type (parameter sets/shows the result code presentation status to the TE)

0 disable; Default value.

1 enable

<m>: integer type (parameter shows the subscriber CLIP / OIP service status in the network).

0 CLIP / OIP not provisioned

1 CLIP / OIP provisioned

2 unknown (e.g. no network, etc.)

<number>: string type phone number of format specified by <type>

<type>: type of address octet in integer format (refer 3GPP TS 24.008 subclause 10.5.4.7)

<subaddr>: string type subaddress of format specified by <satype>

<satype>: type of subaddress octet in integer format (refer 3GPP TS 24.008 subclause 10.5.4.8)

<alpha>: optional string type alphanumeric representation of <number> corresponding to the entry found in phonebook; used character set should be the one selected with command Select TE Character Set +CSCS

<CLI\_validity>: integer type. This parameter can provide details why <number> does not contain a calling

party BCD number (refer 3GPP TS 24.008 subclause 10.5.4.30).

0 CLI valid

1 CLI has been withheld by the originator (refer 3GPP TS 24.008 [8] table 10.5.135a/3GPP TS 24.008 code "Reject by user")

2 CLI is not available due to interworking problems or limitations of originating network (refer 3GPP TS 24.008 [8] table 10.5.135a/3GPP TS 24.008 code "Interaction with other service")

3 CLI is not available due to calling party being of type payphone (refer 3GPP TS 24.008 [8] table 10.5.135a/3GPP TS 24.008 code "Coin line/payphone")

4 CLI is not available due to other reasons (refer 3GPP TS 24.008 [8] table 10.5.135a/3GPP TS 24.008 code "Unavailable").

### 5.1.7 +CLIR, Calling Line Identification Restriction

#### Description

This command instructs the Modem to query, enable or disable the presentation of the CLI (calling line ID) of a MO call to the called party. The restriction of the CLI (disable presentation) is dependent both on the Modem and on the network.

The network enables three possible provisions of CLIR:

- Not provisioned (CLIR Off - presentation allowed)
- Provisioned permanently
- Provisioned with Temporary mode

The provision is fixed and cannot be changed by an AT command. Temporary Mode:

Temporary mode can be in one of two states:

- A - Presentation restricted (CLIR On) as default.
- B - Presentation allowed (CLIR Off) as default. A subscriber to Temporary mode always has a default subscription to state A or B. Temporary-mode provisioning means that the terminal can request the Modem to switch the default mode from A to B, and vice versa.

#### Syntax

Command	Possible Response(s)
AT+CLIR=<n>	OK or +CME ERROR: <err>

Command	Possible Response(s)
AT+CLIR?	+CLIR: <n>,<m> OK
AT+CLIR=?	+CLIR: (list of supported<n>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<n>: integer type (parameter sets the adjustment for outgoing calls).

0 presentation indicator is used according to the subscription of the CLIR / OIR service.

1 CLIR / OIR invocation

2 CLIR / OIR suppression; Default value.

<m>: integer type (parameter shows the subscriber CLIR / OIR service status in the network).

0 CLIR / OIR not provisioned

1 CLIR / OIR provisioned in permanent mode

2 unknown (e.g. no network, etc.)

3 CLIR / OIR temporary mode presentation restricted

4 CLIR / OIR temporary mode presentation allowed

## 5.1.8 +CMOD, Call Mode

### Description

This command selects call mode of further dialing commands (D) or for next answering command (A).

### Syntax

Command	Possible Response(s)
AT+CMOD=[<mode>]	OK +CME ERROR: <err>

Command	Possible Response(s)
AT+CMOD?	+CMOD: <mode> OK
AT+CMOD=?	+CMOD: (list supported <mode>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<mode>: integer type

0 single mode (default)

## 5.1.9 +CHUP, Hang Up Call

### Description

This command causes the Modem to hang up the current and held call.

### Syntax

Command	Possible Response(s)
AT+CHUP	OK or +CME ERROR: <err>

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 30s

### 5.2.16.4 Defined Values

None

## 5.1.10 +MHUP, Module Hung UP call

### Description

This command is used to hung up a call specified by call id or all call if not specify the call id and report a specific disconnect cause to the NW.

### Syntax

Command	Possible Response(s)
AT+MHUP=<cause>[,<call_id>]	OK or +CME ERROR: <err>
AT+MHUP?	+MHUP: <call_id> OK or +CME ERROR: <err>
AT+MHUP=?	+MHUP: (list of supported <cause>s),(list of supported <call_id>s)

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<30s

### Defined Values

<cause>: integer type

- 1 Unassigned (unallocated) number
- 3 No route to destination
- 6 Channel unacceptable
- 8 Operator determined barring
- 16 Normal Call Clearing (default)
- 17 User Busy
- 18 User not responding

- 19 User alerting no answer
- 21 Call rejected
- 22 Number changed
- 25 Pre-emption
- 26 Non selected user clearing
- 27 Destination out of order
- 28 Invalid number format (incomplete number)
- 29 Facility rejected
- 30 Response to STATUS ENQUIRY
- 31 Normal, Unspecified
- 34 No circuit/channel available
- 38 Network out of order
- 41 Temporary failure
- 42 Switching equipment congestion
- 43 Access information discarded
- 44 Requested circuit/channel not available
- 47 Resources unavailable, unspecified
- 49 Quality of service unavailable
- 50 Requested facility not subscribed
- 55 Incoming calls barred within the CUG
- 57 Bearer capability not authorized
- 58 Bearer capability not presently available
- 63 Service or option not available, unspecified
- 65 Bearer service not implemented
- 68 ACM equal to or greater than ACMmax
- 69 Requested facility not implemented
- 70 Only restricted digital information bearer capability is available
- 79 Service or option not implemented, unspecified
- 81 Invalid transaction identifier value
- 87 User not member of CUG
- 88 Incompatible destination
- 91 Invalid transit network selection
- 95 Semantically incorrect message
- 96 Invalid mandatory information

- 97 Message type non-existent or not implemented
- 98 Message type not compatible with protocol state
- 99 Information element non-existent or not implemented

<call\_id>: integer type; Index of the call id (same as <idx> in +CLCC command) and the supported indexes depends on target platform.

- 0 All calls (default).
- Other Specific call id.

### 5.1.11 +MDC, Selection of Desired Message to Be Displayed Upon Connection of a Voice Call

#### Description

This AT command enables you to select the desired messages to be displayed upon connection of a voice call with a remote party. The OK and CONNECT messages are available.

#### Syntax

Command	Possible Response(s)
AT+MDC=<mode>	OK or +CME ERROR: <err>
AT+MDC?	+MDC: <mode> OK
AT+MDC=?	+MDC: (list of supported <mode>s) OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	Yes	Yes	Yes	< 1s

#### Defined Values

<mode>: integer type

- 0 Show OK once voice call is connected. Default Values
- 1 Show CONNECT once voice call connected.
- 2 Show Nothing

## 5.1.12 +CBST, Select Bearer Service Type

### Description

This command sets the bearer service (data circuit duplex asynchronous and synchronous). It chooses one of the bearer services, the data rate of the service (actually the modulation when modem IWFs are used), and enables or disables the Radio Link Protocol.

### Syntax

Command	Possible Response(s)
AT+CBST=[<speed>[,<name>[,<ce>]]]	OK +CME ERROR: <err>
AT+CBST?	+CBST: <speed>,<name>,<ce> OK
AT+CBST=?	+CBST: (list of supported <speed>s),(list of supported <name>s),(list of supported <ce>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

#### Note:

- The default values of below parameters are depended on the target products.
- Not all combinations of below parameters are supported by target products.

<speed>: integer type

- 0 Auto-bauding (automatic selection of the speed; this setting is possible in case of 3.1 kHz modem and non-transparent service)
  - 7 9600 bps (V.32)
  - 12 9600 bps (V.34)
  - 14 14400 bps (V.34)
  - 16 28800 bps (V.34)
  - 17 33600 bps (V.34)
  - 39 9600 bps (V.120)
  - 43 14400 bps (V.120)
  - 48 28800 bps (V.120)
  - 51 56000 bps (V.120)
  - 71 9600 bps (V.110 or X.31 flag stuffing)
  - 75 14400 bps (V.110 or X.31 flag stuffing)
  - 80 28800 bps (V.110 or X.31 flag stuffing)
  - 81 38400 bps (V.110 or X.31 flag stuffing)
  - 83 56000 bps (V.110 or X.31 flag stuffing; this setting can be used in conjunction with asynchronous non-transparent UDI or RDI service in order to get FTM)
  - 84 64000 bps (X.31 flag stuffing; this setting can be used in conjunction with asynchronous non-transparent UDI service in order to get FTM)
  - 116 64000 bps (bit transparent)
  - 134 64000 bps (multimedia)
- <name>: integer type
- 0 Data circuit asynchronous (UDI or 3.1 kHz modem).
  - 1 data circuit synchronous (UDI or 3.1 kHz modem)
  - 4 data circuit asynchronous (RDI)
- <ce>: integer type
- 0 Transparent
  - 1 Non-transparent

## 5.1.13 +FCLASS, Service Class Selection and Identification

### Description

This command puts the MS into a particular mode of operation (data, fax, voice etc.).

### 5.2.19.2 Syntax

Command	Possible Response(s)
AT+FCLASS=[<class>]	OK or +CME ERROR: <err>
AT+FCLASS?	<class> OK
AT+FCLASS=?	(list of supported <class>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<class>: integer type

0 data (default)

8 voice

## 5.1.14 +CSTA, Select Type of Address

### Description

This set command selects the type of number for further dialing commands (D) according to GSM specifications.

### Syntax

Command	Possible Response(s)
AT+CSTA=[<type>]	OK or +CME ERROR: <err>
AT+CSTA?	+CSTA: <type> OK

Command	Possible Response(s)
AT+CSTA=?	+CSTA: (list of supported <type>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<type>: integer type

- 145 Dialing string shall include international access code character "+"
- 129 Dial string begins with a digit or it is a local number (default)

## 5.2 Call Status Messages

### 5.2.1 +CPAS, Phone Activity Status

#### Description

This command displays the current activity status of the Modem; like call in progress, or ringing.

#### Syntax

Command	Possible Response(s)
AT+CPAS	+CPAS: <pas> OK or +CME ERROR: <err>
AT+CPAS=?	+CPAS: (list of supported <pas>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

## Defined Values

<pas>: integer type

- 0 Ready - The Modem allows commands from the terminal
- 1 Unavailable(MT does not allow commands from TA/TE)
- 2 Unknown - The Modem is not guaranteed to respond to instructions
- 3 Ringing (MT calls) - The Modem is ready for commands from the terminal, but the ringer is active
- 4 Call in progress - The Modem is ready for commands from the terminal, but a call is in progress
- 5 Asleep(MT is unable to process commands from TA/TE because it is in a low functionality state)

### 5.2.2 +CLCC, List Current Calls

#### Description

This command displays a list of all current Modem calls and their statuses, and also enables/disables the unsolicited indication of the call list. (If no calls are received, no information response is sent to the terminal.)

If the command succeeds but no calls are available, no information response is sent to the terminal.

The maximum number of simultaneous multiparty calls is 5+1 (5 in active group and 1 on hold).

#### Syntax

Command	Possible Response(s)
AT+CLCC=<state>	OK or +CME ERROR: <err>
AT+CLCC	+CLCC: <idx>,<dir>,<stat>,<mode>,<empty>,<number>,<type> [<CR><LF> +CLCC: <idx>,<dir>,<stat>,<mode>,<empty>,<number>,<type>

Command	Possible Response(s)
	[...] OK
AT+CLCC?	+CLCC: <state> OK
AT+CLCC=?	+CLCC: (list of supported <state>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<state>: integer type, disable or enable +CLCC unsolicited report. Default value is 0.

- 0 disable
- 1 enable

<idx>: integer type. Call identification number as described in 3GPP TS 22.030 subclause 6.5.5.1. This number can be used in +CHLD command operations. Value range is from 1 to N. N, the maximum number of simultaneous call control processes is implementation specific.

<dir>: integer type

- 0 mobile originated (MO) call
- 1 mobile terminated (MT) call

<stat>: integer type (state of the call)

- 0 active
- 1 held
- 2 dialing (MO call)
- 3 alerting (MO call)
- 4 incoming (MT call)
- 5 waiting (MT call)
- 6 released

<mode>: integer type (bearer/teleservice)

- 0 voice

- 1 data
- 2 fax
- 3 voice followed by data, voice mode
- 4 alternating voice/data, voice mode
- 5 alternating voice/fax, voice mode
- 6 voice followed by data, data mode
- 7 alternating voice/data, data mode
- 8 alternating voice/fax, fax mode
- 9 unknown

<empty>: integer type

- 0 call is not one of multiparty (conference) call parties
- 1 call is one of multiparty (conference) call parties

<number>: string type phone number in format specified by <type>.

<type>: type of address octet in integer format (refer 3GPP TS 24.008 subclause 10.5.4.7).

### 5.2.3 +CR, Service Reporting Control

#### Description

This command controls whether the extended format of an outgoing call is displayed or not. The unsolicited result code: +CR: <serv> indication is sent from the Modem to the terminal whenever a data call is initiated by the Modem if <mode>=1.

#### Syntax

Command	Possible Response(s)
AT+CR=[<mode>]	OK
AT+CR?	+CR: <mode> OK
AT+CR=?	+CR: (list of supported <mode>s) OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
----------------	------------	-----------	--------------------	------------------

Yes	No	Yes	Yes	< 1s
-----	----	-----	-----	------

### Defined Values

<mode>: integer type

- 0 Extended format disabled (default)
- 1 Extended format enabled

<serv>: string type; Type of outgoing data calls:

- ASYNC Asynchronous transparent
- SYNC Synchronous transparent
- REL ASYNC Asynchronous non-transparent
- REL SYNC Synchronous non-transparent

## 5.2.4 +CAVIMS, Disable/Enable VOLTE

### Description

This command controls Disable/Enable VOLTE

### Syntax

Command	Possible Response(s)
AT+CAVIMS=[<mode>]	OK
AT+CAVIMS?	+CAVIMS: <mode> OK
AT+CAVIMS=?	+CAVIMS: (list of supported <mode>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<mode>: integer type

- 0 Disable VOLTE
- 1 Enable VOLTE

## 6 System Date and Time Access Commands

### 6.1 General command

#### 6.1.1 +CCLK, Read/Set System Date and Time

##### Description

This command reads and sets the Modem current date, time and time zone.

##### Syntax

Command	Possible Response(s)
AT+CCLK=<time>	OK or +CME ERROR: <err>
AT+CCLK?	+CCLK: <time> OK or +CME ERROR: <err>
AT+CCLK=?	OK

##### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

##### Defined Values

<time>: string type value; format is "yy/MM/dd,hh:mm:ss±zz", where characters indicate year (two last digits), month, day, hour, minutes, seconds and time zone (indicates the difference, expressed in quarters of an hour, between the local time and GMT; range -96...+96). E.g. 6th of May 1994, 22:10:00 GMT+2

hours equals to "94/05/06,22:10:00+08"

- yy 2-digit year [00-99]
- MM 2-digit month [01-12]
- dd 2-digit day of month [00-31]
- hh 2-digit hour [00-23]
- mm 2-digit minute [00-59]
- ss 2-digit seconds [00-59]
- zz (optional) time zone offset from GMT, in quarter-hours [-47...+48]. If this value is not specified, the time zone offset will be 0.

## 6.1.2 +CTZU, Automatic Time Zone Update

### Description

This command enables/disables (on/off) the automatic update of the time zone via NITZ.

### Syntax

Command	Possible Response(s)
AT+CTZU=<onoff>	OK or +CME ERROR: <err>
AT+CTZU?	+CTZU: <onoff> OK
AT+CTZU=?	+CTZU: (list of supported <onoff>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<onoff>: integer type value indicating

- 0 Disable automatic time zone update via NITZ; Default value.

- 1 Enable automatic time zone update via NITZ.

### 6.1.3 +CTZR, Time Zone Reporting

#### Description

This command enables/disables the time zone change event and Daylight saving time reporting. If reporting is enabled the MT returns the unsolicited result code +CTZV: <tz>, or +CTZE: <tz>,<dst>,[<time>].

#### Syntax

Command	Possible Response(s)
AT+CTZR=[<reporting>]	OK or +CME ERROR: <err>
AT+CTZR?	+CTZR: <reporting> OK
AT+CTZR=?	+CTZR: (list of supported <reporting>s) OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect	Time of Duration
Yes	No	Yes	Immediately	< 1s

#### Defined Values

<reporting>: integer type value indicating:

- 0 Disable time zone change event reporting. Default value.
- 1 Enable time zone change event reporting by unsolicited result code +CTZV: <tz>.
- 2 Enable extended time zone and local time reporting by unsolicited result code +CTZE: <tz>,<dst>,[<time>].

<tz>: integer value indicating the time zone.

<time>: string type value; format is "yy/MM/dd, hh:mm:ss", wherein characters indicates year, month, day, hour, minute, second.

minutes, seconds

<dst>: integer value; daylight savings time:

- 0 No adjustment for Daylight Saving Time
- 1 +1 hour adjustment for Daylight Saving Time
- 2 +2 hours adjustment for Daylight Saving Time

## 7 SMS

### 7.1 SMS Commands

Modem supports SMS PDU and SMS TEXT mode according to ETSI specifications 3GPP TS 27.005 & 3GPP TS 03.40/23.0400.

#### 7.1.1 +CSCS, Select Terminal Character Set

##### Description

This command selects the Modem character set. The modem supports the following character sets: "IRA", "GSM", "UCS2", "HEX". The default value is "IRA".

##### Syntax

Command	Possible Response(s)
AT+CSCS=<chset>	OK or +CME ERROR: <err>
AT+CSCS?	+CSCS: <chset> OK
AT+CSCS=?	+CSCS: (list of supported <chset>s) OK

##### Attributes

Pin Restricted	Persistent	Sync Mode	Effect	Time of Duration
			Immediately	

No	No	Yes	Yes	< 1s
----	----	-----	-----	------

### Defined Values

<chset>: string type; Character Set

“IRA” International Reference Alphabet (ITU-T T.50)

“GSM” GSM default alphabet (GSM 03.38 subclause 6.2.1)

“UCS2” 2-byte Universal Character Set, Unicode (ISO/IEC 10646 [32])

“HEX” Character strings consist only of hexadecimal numbers from 00 to FF

“8859-1” ISO-8859-1; And it only be supported in G5 series products.

## 7.1.2 +CSMS, Select Message Service

### Description

This command handles the selection of the messaging service. It returns the types of messages that are supported by the Modem.

### Syntax

Command	Possible Response(s)
AT+CSMS=<service>	+CSMS: <mt>,<mo>,<bm>  OK  or  +CMS ERROR: <err>
AT+CSMS?	+CSMS: <service>,<mt>,<mo>,<bm>  OK
AT+CSMS=?	+CSMS: (list of supported <service>s)  OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<service>: integer type;

- 0 SMS AT command grammar is compatible with GSM Phase 2
- 1 SMS AT command grammar is compatible with GSM Phase 2+

<mt>: integer type; Mobile terminated messages

- 0 Not supported by the Modem
- 1 Supported by the Modem

<mo>: integer type; Mobile originated messages

- 0 Not supported by the Modem
- 1 Supported by the Modem

<bm>: integer type; Broadcast type messages

- 0 Not supported by the Modem
- 1 Supported by the Modem

### 7.1.3 +CPMS, Preferred Message Storage

#### Description

This command handles the selection of the preferred message storage area. The message storage area is divided into three parts, mem1, mem2 and mem3.

#### Syntax

Command	Possible Response(s)
AT+CPMS=<mem1>[,<mem2>[,<mem3>]]	+CPMS: <used1>,<total1>,<used2>,<total2>,<used3>,<total3>  OK  or  +CMS ERROR: <err>
AT+CPMS?	+CPMS:  <mem1>,<used1>,<total1>,<mem2>,<used2>,<total2>,<mem3>,<used3>,<total3>  OK

Command	Possible Response(s)
	or +CMS ERROR: <err>
AT+CPMS=?	+CPMS: (list of supported<mem1>s),(list of supported <mem2>s),(list of supported <mem3>s) OK or +CMS ERROR: <err>

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

## Defined Values

<mem1>: string type; Memory from which messages are read and deleted.

<mem2>: string type; Memory to which writing operation is made.

<mem3>: string type; Memory to which received SMS are stored (unless forwarded directly to TE).

### Note:

Supported values for <mem1>,<mem2>,<mem3> may be:

"BM" Broadcast message storage

"SM" (U)SIM message storage

"ME" ME message storage

"SR" Status report storage

### Note:

- <mem1>,<mem2>,<mem3> may be restored to "SM" after power cycle device
- L8 family products only support "SM" storage for<mem1>,<mem2>,<mem3>
- L7 family products support as below combinations:  
  - <mem1> : "BM", "SM", "SR", "ME"
  - <mem2> and <mem3> : "SM", "ME"
- L6 family products only support "SM", "ME" storage for <mem1>,<mem2>,<mem3>

## 7.1.4 +CMGF, Message Format

### Description

This command is a basic command.

The Set command handles the selection of the message format used with send, list, read and write commands, as well as the format of unsolicited result codes resulting from message receipts.

The Modem supports both PDU mode (where entire TP data units are used) and text mode (where the body of the message and its headers are given as separate parameters).

### Syntax

Command	Possible Response(s)
AT+CMGF=<mode>	OK or +CME ERROR: <err>
AT+CMGF?	+CMGF: <mode> OK
AT+CMGF=?	+CMGF: (list of supported <mode>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<mode>: integer type; Message format:

- 0 PDU mode (default)
- 1 Text mode

## 7.1.5 +CSCA, Service Center Address

### Description

This command enables to write/read SCA to/from SIM. In SMS text mode, SCA stored in SIM is added to any stored and sent SMS. In SMS PDU mode, SCA stored in SIM is added to stored SMS and send SMS only when SCA address length coded in PDU equals zero.

### Syntax

Command	Possible Response(s)
AT+CSCA=<sca>[,<tosca>]	OK or +CME ERROR: <err>
AT+CSCA?	+CSCA: <sca>,<tosca> OK
AT+CSCA=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<sca>: string type and range is 1-20; Service Center Address."+" character prefix of <sca> indicates <tosca> of 145. Each character is represented by semi octets (excluding '+' character). If <sca> contains an odd number of digits, bits 4 to 7 of the last octet shall be filled with an end mark coded "1111".

<tosca>: type of service center address.

<tosca> of 129 is mostly use for local number and 145 for International.

<tosca> of 129 is default value.

<tosca> values are in range of 0-255. Valid values are defined according to: GSM03.40 v7.4.0 section 9.1.2.5 as follow:

Bit 7 is 1

Bits 6,5-4 - Present Type of number as follow:

Bits 6 5 4

- 0 0 0 Unknown
- 0 0 1 International number
- 0 1 0 National number
- 0 1 1 Network specific number
- 1 0 0 Subscriber number
- 1 0 1 Alphanumeric, (coded according to GSM TS 03.38 7-bit default alphabet)
- 1 1 0 Abbreviated number
- 1 1 1 Reserved for extension

Numbering-plan-identification (applies for Type-of-number = 000,001,010)

Bits 3 2 1 0

- 0 0 0 0 Unknown
- 0 0 0 1 ISDN/telephone numbering plan (E.164/E.163)
- 0 0 1 1 Data numbering plan (X.121)
- 0 1 0 0 Telex numbering plan
- 1 0 0 0 National numbering plan
- 1 0 0 1 Private numbering plan
- 1 0 1 0 ERMES numbering plan (ETSI DE/PS 3 01-3)
- 1 1 1 1 Reserved for extension.

All other values are reserved.

## 7.1.6 +CSMP, Set Text Mode Parameters

### Description

This command is a basic command and is used to select values for additional parameters needed when SMS is sent to the network or placed in storage when TEXT mode is selected.

### Syntax

Command	Possible Response(s)
AT+CSMP=[<fo>[,<vp>[,<pid>[,<dc>]]]]	OK or +CME ERROR: <err>
AT+CSMP?	+CSMP: <fo>,<vp>,<pid>,<dc> OK

Command	Possible Response(s)
AT+CSMP=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<fo>: integer type; Depending on the command or result code: first octet of 3GPP TS 23.040 [3] SMS-DELIVER, SMS-SUBMIT(default 17), SMS-STATUS-REPORT, or SMS-COMMAND(default 2) in integer format.

<vp>: integer type; Validity Period, depending on SMS-SUBMIT <fo>, TP-Validity-Period-Format bits setting. If there is no correlation between the VPF and the VP value. an error message will be returned. Either in integer format (see Table) or in time-string format ("yy/MM/dd, hh:mm:ss±zz"). If in integer format the vp will write to SIM EF and read from SIM EF when use it.

**Note:** The following table shows the VP format.

<Parameter>	Description
0 to 143	(TP-VP + 1) x 5 minutes (i.e. 5 minutes intervals up to 12 hours)
144 to 167	12 hours + ((TP-VP - 143) x 30 minutes)
168 to 196	(TP-VP - 166) x 1 day
197 to 255	(TP-VP - 192) x 1 week

<pid>: integer type; Protocol-Identifier. The one octet information element by which the SM-TL either refers to the higher layer protocol being used, or indicates interworking with a certain type of telematic device.

"0 - no interworking, SME-to-SME protocol (default) "Any value between 0-255 will be accepted.

The SC may reject messages with a TP-Protocol-Identifier containing a reserved value or one, which is not supported.

<dcs>: integer type; One octet of Data Coding Scheme, indicates the data coding scheme of the DATA, and may indicate a message class; Default value is 0

## 7.1.7 +CSDH, Show Text Mode Parameters

### Description

This command controls whether detailed header information is shown in text mode result codes.

### Syntax

Command	Possible Response(s)
AT+CSDH=[<show>]	OK or +CME ERROR: <err>
AT+CSDH?	+CSDH: <show> OK
AT+CSDH=?	+CSDH: (list of supported <show>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<show>: integer type

- 0 do not show header values defined in commands +CSCA and +CSMP (<sca>, <tosca>, <fo>, <vp>, <pid> and <dcs>) nor <length>, <toda> or <toa> in +CMT, +CMGL, +CMGR result codes for SMS-DELIVERs and SMS-SUBMITs in text mode; for SMS-COMMANDs in +CMGR result code, do not show <pid>, <mn>, <da>, <toda>, <length> or <cdata>; Default value.
- 1 show the values in result codes

## 7.1.8 +CNMI, New Message Indications to Terminal

### Description

This command handles enabling of unsolicited notifications to the terminal when an SMS is received by the Modem.

After sending an unsolicited response to the TE, the Modem will expect a +CNMA (new message acknowledgement) from the TE within a predefined timeout of 15 seconds. Within the timeout the Modem will not send another unsolicited response to the TE before the previous one is acknowledgement. If the Modem does not receive acknowledgment within the required time, CNMI parameters will NOT be reset automatically and the unsolicited response will send to the TE again.

## Syntax

Command	Possible Response(s)
AT+CNMI=[<mode>[,<mt>[,<bm>[,<ds>[,<bfr>]]]]]	OK or +CME ERROR: <err>
AT+CNMI?	+CNMI: <mode>,<mt>,<bm>,<ds>,<bfr> OK
AT+CNMI=?	+CNMI: (list of supported <mode>s),(list of supported <mt>s),(list of supported <bm>s),(list of supported <ds>s),(list of supported <bfr>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

## Defined Values

<mode>: integer type, Default value is 0.

- 0 Buffer unsolicited result codes in the TA. If TA result code buffer is full, indications can be buffered in some other place or the oldest indications may be discarded and replaced with the new received indications.
- 1 Discard indication and reject new received message unsolicited result codes when TA-TE link is reserved (e.g. in on-line data mode). Otherwise forward them directly to the TE.
- 2 Buffer unsolicited result codes in the TA when TA-TE link is reserved (e.g. in on-line data mode) and flush them to the TE after reservation. Otherwise forward them directly to the TE.

<mt>: integer type (the rules for storing received SMS depend on its data coding scheme (refer 3GPP TS 23.038 [2]), preferred memory storage (+CPMS) setting and this value; refer table 8.1.8-1; Default value is 0.

- 0 No SMS-DELIVER indications are routed to the TE.
- 1 If SMS-DELIVER is stored into ME/TA, indication of the memory location is routed to the TE using unsolicited result code:
- 2 SMS-DELIVERs (except class 2 messages and messages in the message waiting indication group (store message)) are routed directly to the TE using unsolicited result code:

+CMTI: <mem>,<index>

+CMT: [<alpha>,<length><CR><LF><pdu> (PDU mode enabled); or

+CMT: <oa>,<alpha>,<scts>,<tooa>,<fo>,<pid>,<dcsc>,<sca>,<tosca>,<length>]<CR><LF><data>(text mode enabled; about parameters in italics, refer command Show Text Mode Parameters +CSDH)

If ME has its own display device then class 0 messages and messages in the message waiting indication group (discard message) may be copied to both ME display and to TE. In this case, ME shall send the acknowledgement to the network.

Class 2 messages and messages in the message waiting indication group (store message) result in indication as defined in <mt>=1.

- 3 Class 3 SMS-DELIVERs are routed directly to TE using unsolicited result codes defined in <mt>=2. Messages of other data coding schemes result in indication as defined in <mt>=1

Table 8.1.8-1: <mt> parameter

<mt>	Receiving procedure for different message data coding schemes (refer 3GPP TS 23.038 [2])
0	no class: as in 3GPP TS 23.038 [2], but use <mem3> as preferred memory class 0: as in 3GPP TS 23.038 [2], but use <mem3> as preferred memory if message is tried to be stored class 1: as in 3GPP TS 23.038 [2], but use <mem3> as preferred memory class 2: as in 3GPP TS 23.038 [2] class 3: as in 3GPP TS 23.038 [2], but use <mem3> as preferred memory message waiting indication group (discard message): as in 3GPP TS 23.038 [2], but use <mem3> as preferred memory if message is tried to be stored message waiting indication group (store message): as in 3GPP TS 23.038 [2], but use <mem3> as preferred memory
1	as <mt>=0 but send indication if message stored successfully
2	no class: route message to TE class 0: as in 3GPP TS 23.038 [2], but also route message to TE and do not try to store it in memory class 1: route message to TE class 2: as <mt>=1 class 3: route message to TE message waiting indication group (discard message): as in 3GPP TS 23.038 [2], but also route message to TE and do not try to store it in memory message waiting indication group (store message): as <mt>=1
3	class 3: route message to TE others: as <mt>=1

<bm> integer type (the rules for storing received CBMs depend on its data coding scheme (refer 3GPP TS 23.038 [2]), the setting of Select CBM Types (+CSCB) and this value; refer table 8.1.8-2); Default value is 0.

- 0 No CBM indications are routed to the TE.
- 1 If CBM is stored into ME/TA, indication of the memory location is routed to the TE using unsolicited result code:

+CBMI: <mem>,<index>

- 2 New CBMs are routed directly to the TE using unsolicited result code:

+CBM: <length><CR><LF><pdu> (PDU mode enabled); or

+CBM: <sn>,<mid>,<dc>,<page>,<pages><CR><LF><data> (text mode enabled)

If ME supports data coding groups which define special routing also for messages other than class 3 (e.g. (U)SIM specific messages), ME may choose not to route messages of such data coding schemes into TE (indication of a stored CBM may be given as defined in <bm>=1).

- 3 Class 3 CBMs are routed directly to TE using unsolicited result codes defined in <bm>=2. If CBM storage is supported, messages of other classes result in indication as defined in <bm>=1.

**Table 8.1.8-2: <bm> parameter**

<bm>	Receiving procedure for different message data coding schemes (refer 3GPP TS 23.038 [2])
0	all schemes: as in 3GPP TS 23.038 [2]; if CBM storage is supported, store message to "BM" (or some manufacturer or data coding scheme specific memory)
1	all schemes: as <bm>=0 but send indication if message stored successfully
2	all schemes: route message to TE unless ME has detected a special routing to somewhere else (e.g. to (U)SIM; an indication may be sent if message stored successfully)
3	class 3: route message to TE others: as <bm>=1 (if CBM memory storage is supported)

<ds>: integer type; Default value is 0.

- 0 No SMS-STATUS-REPORTs are routed to the TE.
- 1 SMS-STATUS-REPORTs are routed to the TE using unsolicited result code:  
+CDS: <length><CR><LF><pdu> (PDU mode enabled); or  
+CDS: <fo>,<mr>,<ra>,<tora>,<scts>,<dt>,<st> (text mode enabled)
- 2 If SMS-STATUS-REPORT is stored into ME/TA, indication of the memory location is routed to the TE using unsolicited result code:

+CDSI: <mem>,<index>

**Table 8.1.8-3: SMS-STATUS-REPORT result code and acknowledgement summary**

<ds>	result codes and commands
1	+CDS&+CNMA <sup>1)</sup>
2	+CDSI
<sup>1)</sup>	acknowledgement command must be sent when +CSMS<service> value equals 1

<bfr>: integer type; Default value is 0.

- 0 TA buffer of unsolicited result codes defined within this command is flushed to the TE when <mode> 1...3 is entered (OK response shall be given before flushing the codes).
- 1 TA buffer of unsolicited result codes defined within this command is cleared when <mode> 1...3 is entered.

### 7.1.9 +CNMA, New Message Acknowledgment

#### Description

This command acknowledges the receipt of a +CMT and +CDS response from the terminal to the Modem. A +CMT response receipt confirms the correct reception of a new SMS-DELIVER message, which was routed directly to the terminal. A +CDS response receipt confirms the correct reception of a new SMS-STATUS-REPORT message, which was routed directly to the terminal.

When the Modem sends a +CDS response to the terminal, it waits a predefined timeout of 15 seconds for the +CNMA acknowledgment. The Modem will not send another +CDS result code to the terminal before the previous one is acknowledged, or the timeout expires.

When the Modem sends a +CMT response to the terminal, it waits a predefined timeout of 15 seconds for the +CNMA acknowledgment. The Modem will not send another +CMT result code to the terminal before the previous one is acknowledged, or the timeout expires. Upon receipt of the +CNMA command, the Modem sends RP-ACK to the network. The acknowledged SMS will not be saved in message storage. If the command is executed but no acknowledgment is expected, or some other Modem related error occurs, the final result code +CMS ERROR: <err> is returned.

#### Syntax

Command	Possible Response(s)
<b>For text mode (+CMGF=1)</b> AT+CNMA	OK or
<b>For PDU mode (+CMGF=0)</b>	+CME ERROR: <err>

Command	Possible Response(s)
AT+CNMA[=<n>[,<length>[<CR>PDU<ctrl-Z/ESC>]]]	
AT+CNMA=?	OK in text mode or +CNMA: (list of supported <n>s) in PDU mode

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<n>: integer type

- 0 command operates similarly as defined for the text mode
- 1 send RP-ACK
- 2 send RP-ERROR

<length>: integer type; Length of the PDU in PDU mode

## 7.1.10 +CMGL, List Messages

### Description

These commands display a list of all SMS with the status value <stat>, from the Modem message storage <mem1> (selected using the +CPMS command). The command returns a series of responses, one per message, each item containing the message index, status, and data. If the status of a message is "RECEIVED UNREAD", execution of the +CMGL command changes the status of the message to "RECEIVED READ".

### Syntax

Command	Possible Response(s)
AT+CMGL[=<stat>]	if text mode (+CMGF=1), command successful and SMS-

Command	Possible Response(s)
	<p>SUBMITs and/or SMS-DELIVERs:</p> <p>+CMGL:            &lt;index&gt;,&lt;stat&gt;,&lt;oa/da&gt;,&lt;alpha&gt;,&lt;scts&gt;,&lt;tooa/to da&gt;,&lt;br&gt;           &lt;length&gt;&lt;CR&gt;&lt;LF&gt;&lt;data&gt;&lt;CR&gt;&lt;LF&gt;</p> <p>+CMGL:            &lt;index&gt;,&lt;stat&gt;,&lt;da/oa&gt;,&lt;alpha&gt;,&lt;scts&gt;,&lt;tooa/to da&gt;,&lt;br&gt;           &lt;length&gt;&lt;CR&gt;&lt;LF&gt;&lt;data&gt;[...]</p> <p>if text mode (+CMGF=1), command successful and SMS-STATUS-REPORTs:</p> <p>+CMGL:            &lt;index&gt;,&lt;stat&gt;,&lt;fo&gt;,&lt;mr&gt;,&lt;ra&gt;,&lt;tora&gt;,&lt;scts&gt;,&lt;dt&gt;,&lt;st&gt;&lt;br&gt;           [&lt;CR&gt;&lt;LF&gt;</p> <p>+CMGL:            &lt;index&gt;,&lt;stat&gt;,&lt;fo&gt;,&lt;mr&gt;,&lt;ra&gt;,&lt;tora&gt;,&lt;scts&gt;,&lt;dt&gt;,&lt;st&gt;&lt;br&gt;           [...]</p> <p>if text mode (+CMGF=1), command successful and SMS-COMMANDs:</p> <p>+CMGL: &lt;index&gt;,&lt;stat&gt;,&lt;fo&gt;,&lt;ct&gt;&lt;CR&gt;&lt;LF&gt;</p> <p>+CMGL: &lt;index&gt;,&lt;stat&gt;,&lt;fo&gt;,&lt;ct&gt;[...]</p> <p>if text mode (+CMGF=1), command successful and CBM storage:</p> <p>+CMGL: &lt;index&gt;,&lt;stat&gt;,&lt;sn&gt;,&lt;mid&gt;,&lt;page&gt;,&lt;pages&gt;&lt;br&gt;           &lt;CR&gt;&lt;LF&gt;&lt;data&gt;&lt;CR&gt;&lt;LF&gt;</p> <p>+CMGL: &lt;index&gt;,&lt;stat&gt;,&lt;sn&gt;,&lt;mid&gt;,&lt;page&gt;,&lt;pages&gt;&lt;br&gt;           &lt;CR&gt;&lt;LF&gt;&lt;data&gt;[...]</p> <p>otherwise:            +CMS ERROR: &lt;err&gt;</p>
AT+CMGL=?	+CMGL: (list of supported <stat>s)

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<5s

## Defined Values

<index> 1-352 Index of message in storage.

<stat> Status of message in memory:

PDU mode	Text mode	Description
0	“REC UNREAD”	Received unread messages (default)
1	“REC READ”	Received read messages
2	“STO UNSENT”	Stored unsent messages
3	“STO SENT”	Stored sent message
4	“ALL”	All messages

For fault tolerance, two modes can be trade off

<oa/da> Original/destination address.

<data> Message contents in text mode

<length> In PDU mode: Size of message, in octets, excluding SMSC data. InTEXT mode: Number of characters included in <data>.

<pdu> Message header and contents in PDU mode format. See description in “+CMGR, Read Message”.

<toda/toda> Type of origination address / destination address

<fo> First octet of the SMS

<mr> Message Reference

<ra> Recipient-Address

<tora> Type of Recipient address

<scts> Service center time stamp

<ct> Command type

<sn> Message serial number

<mid> Message ID

<page> Current page number

<pages> Total number of pages

<dt> Discharge-Time

<st> Status

## 7.1.11 +CMGR, Read Message

### Description

These commands handle the reading of SMS. The command displays the message in location <index> of the preferred message storage <mem1> (selected using the +CPMS command). If the status of the message is "RECEIVED UNREAD", the +CMGR command changes the status to "RECEIVED READ".

### Syntax

Command	Possible Response(s)
AT+CMGR=<index>	<p>if text mode (+CMGF=1), command successful and SMS-DELIVER:</p> <p>+CMGR:            &lt;stat&gt;,&lt;oa&gt;,[&lt;alpha&gt;],&lt;scts&gt;[,&lt;tooa&gt;,&lt;fo&gt;,&lt;pid&gt;,&lt;dc&gt;,&lt;sca&gt;,&lt;tosca&gt;,&lt;length&gt;]&lt;CR&gt;&lt;LF&gt;&lt;data&gt;</p> <p>if text mode (+CMGF=1), command successful and SMS-SUBMIT:</p> <p>+CMGR:            &lt;stat&gt;,&lt;da&gt;,[&lt;alpha&gt;][,&lt;toda&gt;,&lt;fo&gt;,&lt;pid&gt;,&lt;dc&gt;,[&lt;vp&gt;],&lt;sca&gt;,&lt;tosca&gt;,&lt;length&gt;]&lt;CR&gt;&lt;LF&gt;&lt;data&gt;</p> <p>if text mode (+CMGF=1), command successful and SMS-STATUS-REPORT:</p> <p>+CMGR: &lt;stat&gt;,&lt;fo&gt;,&lt;mr&gt;,[&lt;ra&gt;],[&lt;tora&gt;],&lt;scts&gt;,&lt;dt&gt;,&lt;st&gt;</p> <p>if text mode (+CMGF=1), command successful and SMS-COMMAND:</p> <p>+CMGR:            &lt;stat&gt;,&lt;fo&gt;,&lt;ct&gt;[,&lt;pid&gt;,[&lt;mn&gt;],[&lt;da&gt;],[&lt;toda&gt;],&lt;length&gt;]            &lt;CR&gt;&lt;LF&gt;&lt;ldata&gt;]</p> <p>if text mode (+CMGF=1), command successful and CBM storage:</p> <p>+CMGR:            &lt;stat&gt;,&lt;sn&gt;,&lt;mid&gt;,&lt;dc&gt;,&lt;page&gt;,&lt;pages&gt;&lt;CR&gt;&lt;LF&gt;&lt;data&gt;</p>

Command	Possible Response(s)
	otherwise: +CMS ERROR: <err>
AT+CMGR=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<2s

### Defined Values

<index> Integer type and value starts from 1; Index in storage of the message to be retrieved.

<stat> Status of message in memory:

PDU mode	Text mode	Description
0	“REC UNREAD”	Received unread messages (default)
1	“REC READ”	Received read messages
2	“STO UNSENT”	Stored unsent messages
3	“STO SENT”	Stored sent message
4	“ALL”	All messages

<alpha> Alpha ID of message (not present).

<length> In PDU mode: Size of message, in octets, excluding SMSC data. In TEXT mode: Number of characters included in <data>.

<pdu> Message header and contents in PDU mode format. See description in the table below.

<oa/da> Original/destination address.

<data> Message contents in text mode

<toda/toda> Type of origination address / destination address

<fo> First octet of the SMS

<pid> Protocol Identifier

<dcs> Data Coding Scheme

<sca> Service Center Address

<tosca> Type of Service Center Address

<vp> Validity Period. Either in integer format or in time-string format (“yy/MM/dd, hh: mm: ss±zz”)

<mr> Message reference

<scts> Service center time stamp

<ct>	Command type
<sn>	Message serial number
<mn>	Message Number
<cdata>	Command-Data
<mid>	Message ID
<page>	Current page number
<pages>	Total number of pages
<mr>	Message reference
<ra>	Message Recipient address
<tora>	Type of Recipient address
<scts>	Service center time stamp
<dt>	Discharge-Time
<st>	Status

## 7.1.12 +CMSS, Send Message from Storage

### Description

This command sends a pre-stored message, written previously using the +CMGW command. The <da>, <toda> parameters are optional. If a DA is given, the message is sent to that address. Otherwise the message is sent to the DA it was stored with (if any was entered). If no DA is found, an error occurs.

When the given index is an incoming message index the header settings will be as follows:

- ◆ <first-octet> will be SMS-SUBMIT and VPF - relative.
- ◆ The TP-RP and TP-UDHI settings will be taken from the incoming message's first octet.
- ◆ <vp> - will be set to the default value -167 - as defined in 03.40.
- ◆ <sca>, <tosca>, <pid> and <dcs> will be set according the incoming message parameters.
- ◆ If <da> and/or <toda> are not given by the command, the <oa> and <tooa> will be set instead.

### Syntax

Command	Possible Response(s)
AT+CMSS=<index>[,<da>[,<toda>]]	+CMSS: <mr> or +CMS ERROR: <err>
AT+CMSS=?	OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<60s

## Defined Values

<index>: integer type; Index in storage of the message to be sent.

<da>: string type; Destination address in quoted string. This field contains a single phone number.

<todo>: string type; Type of DA. Value between 128-255 (according to GSM 03.40, 9.1.2.5). If this field is not given and first character of <da> is '+', <todo> will be 145, otherwise 129.

<mr>: integer type; Sent message reference number.

### 7.1.13 +CMGW, Write Message to Memory

#### Description

This command sends a pre-stored message, written previously using the +CMGW command. The <da>, <todo> parameters are optional. If a DA is given, the message is sent to that address. Otherwise the message is sent to the DA it was stored with (if any was entered). If no DA is found, an error occurs.

When the given index is an incoming message index the header settings will be as follows:

- ◆ <first-octet> will be SMS-SUBMIT and VPF - relative.
- ◆ The TP-RP and TP-UDHI settings will be taken from the incoming message's first octet.
- ◆ <vp> - will be set to the default value -167 - as defined in 03.40.
- ◆ <sca>, <tosca>, <pid> and <dcs> will be set according the incoming message parameters.
- ◆ If <da> and/or <todo> are not given by the command, the <oa> and <tooa> will be set instead.

#### Syntax

Command	Possible Response(s)
If text mode (+CMGF=1): AT+CMGW[=<da>[,<todo>[,<stat>]]]<CR> >text is entered<ctrl-Z/ESC>	+CMGW: <index> or +CMS ERROR: <err>
if PDU mode (+CMGF=0): AT+CMGW=<length>[,<stat>]<CR>	

Command	Possible Response(s)
PDU is given<ctrl-Z/ESC>	

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<2s

### Defined Values

<da>: string type; destination address, string type represented in the currently selected character set.

<tda>: integer type; type of destination address.

129 number in national format

145 number in international format (contains the "+")

<stat>:string type; message status.

"REC UNREAD" new received message unread (default for DELIVER messages)

"REC READ" received message read

"STO UNSENT" message stored not yet sent (default for SUBMIT messages)

"STO SENT" message stored already sent

## 7.1.14 +CMGD, Delete Message

### Description

This command handles deletion of a single message from memory location <index>, or multiple messages according to <delflag>. If the optional parameter <delflag> is entered, and is greater than 0, the <index> parameter is practically ignored. If deletion fails, result code +CMS ERROR: <err> is returned.

### Syntax

Command	Possible Response(s)
AT+CMGD=<index>[,<delflag>]	OK or +CME ERROR: <err>
AT+CMGD=?	+CMGD: (list of valid<index>s),(list of valid<delflag>s)

Command	Possible Response(s)
	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<5s

### Defined Values

<index>: integer type; Index in the SMS memory of the message to be deleted.

<delflag>: integer type, indicating multiple message deletion request as follows:

- 0 Delete the message specified in <index>
- 1 Delete all read messages from preferred message storage, leaving unread messages and stored mobile originated messages (whether sent or not) untouched
- 2 Delete all read messages from preferred message storage and sent mobile originated messages, leaving unread messages and unsent mobile originated messages untouched
- 3 Delete all read messages from preferred message storage, sent and unsent mobile originated messages leaving unread messages untouched.
- 4 Delete all messages from preferred message storage including unread messages.

## 7.1.15 +CGSMS, Select Service for MO SMS Messages

### Description

This command handles the selection of the service or service preference used by the Modem to send mobile-originated SMS messages.

### Syntax

Command	Possible Response(s)
AT+CGSMS=[<service>]	OK or +CME ERROR: <err>
AT+CGSMS?	+CGSMS: <service> OK

Command	Possible Response(s)
AT+CGSMS=?	+CGSMS: (list of currently available <service>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<service>: integer type; indicates the service or service preference to be used. The default value is manufacturer specific.

- 0 Packet Domain
- 1 Circuit switched; Note: Suggest use this one as Default setting
- 2 Packet Domain preferred (use circuit switched if GPRS not available)
- 3 Circuit switched preferred (use Packet Domain if circuit switched not available)

## 7.1.16 +CMGS, Send SMS to Network

### Description

This command sends an SMS from the Modem to the network. The message reference value <mr> is returned to the Modem upon successful delivery of the message.

Valid <tda> will be any value between 128-255.

The header parameters in TEXT mode will be set according to CSMP settings.

### Syntax

Command	Possible Response(s)
<b>If text mode (+CMGF=1):</b> AT+CMGS=<da>[,<tda>]<CR>text is entered<ctrl-Z/ESC>	if text mode (+CMGF=1) and sending successful: +CMGS: <mr>[,<scts>] OK
<b>If PDU mode (+CMGF=0):</b> AT+CMGS=<length><CR> PDU is entered<ctrl-Z/ESC>	if PDU mode (+CMGF=0) and sending successful: +CMGS: <mr> OK if sending fails:

Command	Possible Response(s)
	+CMS ERROR: <err>
AT+CMGS=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	<60s

### Defined Values

<da>: string type; Destination address in quoted string. This field contains a single MIN number.

<tda>: integer type; Type of DA. Value between 128-255 (according to GSM 03.40, 9.1.2.5). If this field is not given and first character of <da> is '+', <tda> will be 145, otherwise 129.

<length>: integer type; Size of message in PDU mode format, in octets, excluding SMSC data.

<mr>: integer type; Sent message reference number.

## 7.1.17 +CSCB, Cell Broadcast Messages

### Description

This command handles the selection of cell broadcast message types and data coding schemes received by the Modem.

### Syntax

Command	Possible Response(s)
AT+CSCB=[<mode>[,<mids>[,<dcss>]]]	If mode=0 and <mids> is not specified, then no channels are accepted, and the Modem channel/mid list is cleared.  OK  or  +CMS ERROE: <err>
AT+CSCB?	+CSCB: <mode>,<mids>,<dcss>  OK
AT+CSCB=?	+CSCB: (list of supported <mode>s)

Command	Possible Response(s)
	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<mode>: integer type

0 message types specified in <mids> and <dcss> are accepted

1 message types specified in <mids> and <dcss> are not accepted; Default value

<mids>: string type and range is 0-65535; all different possible combinations of CBM message identifiers (refer <mid>) (default is empty string); e.g. "0,1,5,320-478,922"

<dcss>: string type and range is 0-255; all different possible combinations of CBM data coding schemes (refer <dc>) (default is empty string); e.g. "0-3,5"

## 7.1.18 +SMMFULL, Set Unsolicited Response (SMS Storage Space Full)

### Description

This command handles the unsolicited response when the SMS storage space is full, if enabled the unsolicited response, we will receive a message about storage space full when received SMS.

### Syntax

Command	Possible Response(s)
AT+SMMFULL=<report_flag>	OK or +CME ERROR: <err>
AT+SMMFULL?	+SMMFULL: <report_flag> OK
AT+SMMFULL=?	+SMMFULL: (list of supported <report_flag>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<report\_flag>: integer type

0 disable unsolicited response, default value.

1 enable unsolicited response

Note: This command is not applicable to SG-9600-00

## 8 Access and security

### 8.1 Commands

#### 8.1.1 A/, Repeat Last Command

##### Description

This command repeats the last command. It is not necessary to press <Enter> after this command.

##### Syntax

Command	Possible Response(s)
A/	Repeats last command

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

None

### 8.1.2 AT, Check AT Communication

#### Description

This command only returns OK.

#### Syntax

Command	Possible Response(s)
AT	OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

None

### 8.1.3 +CPIN, Enter PIN for Unlocking SIM or Enter PUK for Unblocking SIM

#### Description

Set command sends to the MT a password which is necessary before it can be operated (SIM PIN, SIM PUK, PH-SIM PIN, etc.). If the PIN is to be entered twice, the TA shall automatically repeat the PIN. If no PIN request is pending, no action is taken towards MT and an error message, +CME ERROR, is returned to TE. Refer CME ERROR for possible <err> values.



#### NOTE:

SIM PIN, SIM PUK, PH-SIM PIN, PH-FSIM PIN, PH-FSIM PUK, SIM PIN2 and SIM PUK2 refer to the PIN of the selected application on the UICC. For example, in an UTRAN context, the selected application on the currently selected UICC should be a USIM and the SIM PIN then

represents the PIN of the selected USIM. See 3GPP TS 31.101 [65] for further details on application selection on the UICC.

If the PIN required is SIM PUK or SIM PUK2, the second pin is required. This second pin, <newpin>, is used to replace the old pin in the SIM.



**NOTE:**

Commands which interact with MT that are accepted when MT is pending SIM PIN, SIM PUK, or PH-SIM are: +CGMI, +CGMM, +CGMR, +CGSN, D112; (emergency call), +CPAS, +CFUN, +CPIN, +CPINR, +CDIS (read and test command only), and +CIND (read and test command only). It is implementation specific whether additional commands can be accepted when MT is pending SIM PIN, SIM PUK, or PH-SIM.

Read command returns an alphanumeric string indicating whether some password is required or not.

**Syntax**

Command	Possible Response(s)
AT+CPIN=<pin>[,<newpin>]	OK or +CME ERROR: <err>
AT+CPIN?	+CPIN: <code> OK or +CME ERROR: <err>
AT+CPIN=?	OK

**Attributes**

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

**Defined Values**

<pin>, <newpin>: string type values

<code> values reserved by the present document:

READY      MT is not pending for any password

SIM PIN	MT is waiting SIM PIN to be given
SIM PUK	MT is waiting SIM PUK to be given
PH-SIM PIN	MT is waiting phone-to-SIM card password to be given
PH-FSIM PIN	MT is waiting phone-to-very first SIM card password to be given
PH-FSIM PUK	MT is waiting phone-to-very first SIM card unblocking password to be given
SIM PIN2	MT is waiting SIM PIN2 to be given (this <code> is recommended to be returned only when the last executed command resulted in PIN2 authentication failure (i.e. +CME ERROR: 17); if PIN2 is not entered right after the failure, it is recommended that MT does not block its operation)
SIM PUK2	MT is waiting SIM PUK2 to be given (this <code> is recommended to be returned only when the last executed command resulted in PUK2 authentication failure (i.e. +CME ERROR: 18); if PUK2 and new PIN2 are not entered right after the failure, it is recommended that MT does not block its operation)
PH-NET PIN	MT is waiting network personalization password to be given
PH-NET PUK	MT is waiting network personalization unblocking password to be given
PH-NETSUB PIN	MT is waiting network subset personalization password to be given
PH-NETSUB PUK	MT is waiting network subset personalization unblocking password to be given
PH-SP PIN	MT is waiting service provider personalization password to be given
PH-SP PUK	MT is waiting service provider personalization unblocking password to be given
PH-CORP PIN	MT is waiting corporate personalization password to be given
PH-CORP PUK	MT is waiting corporate personalization unblocking password to be given

## 8.1.4 +TPIN, Query Number of Remaining SIM PIN/PUK Entering Attempts

### Description

This command returns the number of remaining attempts of entering the PIN and PUK for the SIM card in use. The command returns the number of remaining attempts for PIN1 (CHV1), PIN2 (CHV2), PUK1 (unlock CHV1) and PUK2 (unlock CHV2).

Number of available attempts is provider dependent. Typically, it is 3 attempts for PIN, 10 attempts for PUK.

This command will return error if SIM is not inserted.

## Syntax

Command	Possible Response(s)
AT+TPIN?	+TPIN: <chv1>,<unb1_chv1>,<chv2>,<unb1_chv2>  or  +CME ERROR: <err>

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

## Defined Values

<chv1>: integer type; number of remaining PIN attempts

<chv2>: integer type; number of remaining PIN2 attempts

<unbl\_chv1>: integer type; number of remaining PUK attempts

<unbl\_chv2>: integer type; number of remaining PUK2 attempts

## 8.1.5 +CPWD, Change Password

### Description

This command sets a new password for the facility lock. The password can only be changed once the required facility is enabled by the +CLCK command.

A password can be changed only if the provided password <oldpwd> has been verified. The entered password <newpwd> must also comply to the password rules. The facility value <fac> is not case-sensitive. In the password value, letters are not allowed.

## Syntax

Command	Possible Response(s)
AT+CPWD=<fac>,<oldpwd>,<newpwd>	OK  or  +CME ERROR: <err>

Command	Possible Response(s)
AT+CPWD=?	+CPWD: list of Supported (<fac>,<pwdlength>)s  OK  or  +CME ERROR: <err>

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<fac>: string type

- "SC" SIM (lock SIM/UICC card installed in the currently selected card slot) (SIM/UICC asks password in MT power-up and when this lock command issued)
- "AO" BAOC (Barr All Outgoing Calls) (refer 3GPP TS 22.088 [6] clause 1)
- "OI" BOIC (Barr Outgoing International Calls) (refer 3GPP TS 22.088 [6] clause 1)
- "OX" BOIC-exHC (Barr Outgoing International Calls except to Home Country) (refer 3GPP TS 22.088 clause 1)
- "AI" BAIC (Barr All Incoming Calls) (refer 3GPP TS 22.088 [6] clause 2)
- "IR" BIC-Roam (Barr Incoming Calls when Roaming outside the home country) (refer 3GPP TS 22.088 clause 2)
- "AB" All Barring services (refer 3GPP TS 22.030 [19]) (applicable only for <mode>=0)
- "AG" All outGoing barring services (refer 3GPP TS 22.030 [19]) (applicable only for <mode>=0)
- "AC" All inComing barring services (refer 3GPP TS 22.030 [19]) (applicable only for <mode>=0)
- "P2" SIM PIN2

<oldpwd>, <newpwd>: string type; <oldpwd> shall be the same as password specified for the facility from the MT user interface or with command Change Password +CPWD and <newpwd> is the new password; maximum length of password can be determined with <pwdlength>

<pwdlength>: integer type maximum length of the password for the facility



- "AO" BAOC (Barr All Outgoing Calls) (refer 3GPP TS 22.088 [6] clause 1)
  - "OI" BOIC (Barr Outgoing International Calls) (refer 3GPP TS 22.088 [6] clause 1)
  - "OX" BOIC-exHC (Barr Outgoing International Calls except to Home Country) (refer 3GPP TS 22.088 clause 1)
  - "AI" BAIC (Barr All Incoming Calls) (refer 3GPP TS 22.088 [6] clause 2)
  - "IR" BIC-Roam (Barr Incoming Calls when Roaming outside the home country) (refer 3GPP TS 22.088 clause 2)
  - "AB" All Barring services (refer 3GPP TS 22.030 [19]) (applicable only for <mode>=0)
  - "AG" All outGoing barring services (refer 3GPP TS 22.030 [19]) (applicable only for <mode>=0)
  - "AC" All inComing barring services (refer 3GPP TS 22.030 [19]) (applicable only for <mode>=0)
  - "PS" PH-SIM (lock PHone to SIM/UICC card installed in the currently selected card slot) (MT asks password when other than current SIM/UICC card inserted; MT may remember certain amount of previously used cards thus not requiring password when they are inserted)
  - "FD" SIM card or active application in the UICC (GSM or USIM) fixed dialling memory feature (if PIN2 authentication has not been done during the current session, PIN2 is required as <passwd>)
  - "PN" Network Personalization (refer 3GPP TS 22.022 [33])
  - "PU" network sUbsset Personalization (refer 3GPP TS 22.022 [33])
  - "PP" service Provider Personalization (refer 3GPP TS 22.022 [33])
  - "PC" Corporate Personalization (refer 3GPP TS 22.022 [33])
- <mode>: integer type
- 0 unlock
  - 1 lock
  - 2 query status
- <status>: integer type
- 0 not active
  - 1 active
- <passwd>: string type; shall be the same as password specified for the facility from the MT user interface or with command Change Password +CPWD
- <class> is a sum of integers each representing a class of information (default 7 - voice, data and fax):
- 1 voice (telephony)
  - 2 data (refers to all bearer services; with <mode>=2 this may refer only to some bearer service if TA does not support values 16, 32, 64 and 128)
  - 4 fax (facsimile services)
  - 8 short message service

- 16 data circuit sync
- 32 data circuit async
- 64 dedicated packet access
- 128 dedicated PAD access

### 8.1.7 +CPINR, Remaining PIN Retries

#### Description

Set command cause the MT to return the number of remaining PIN retries for the MT passwords with intermediate result code +CPINR: <cod>,<retries>[,<default\_retries>]for standard PINs. One line with one intermediate result code is returned for every<cod> selected by <sel\_code>. When execution command is issued without the optional parameter <sel\_code>, intermediate result codes are returned for all <cod>s. In the intermediate result codes, the parameter <default\_retries> is an optional(manufacturer specific) parameter, per <cod>.

#### Syntax

Command	Possible Response(s)
AT+CPINR[=<sel_code>]	OK or +CME ERROR: <err>
AT+CPINR=?	OK

#### Attributes

Pin Restricted	Persisten	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

#### Defined Values

<retries>: integer type. Number of remaining retries per PIN.

<default\_retries>: integer type. Number of default/initial retries per PIN.

<code>: Type of PIN. All values listed under the description of the AT+CPIN command, <code> parameter, except 'READY'.

<ext\_code>: Extended, manufacturer specific codes.

<sel\_code>: String type. Same values as for the <code> and <ext\_code> parameters. These values are strings and shall be indicated within double quotes. It is optional to support wildcard match by '\*', meaning match any (sub-)string.

Example: AT+CPINR="SIM\*" will return the lines:

```
+CPINR: SIM PIN,<retries>,<default_retries>
+CPINR: SIM PUK,<retries>,<default_retries>
+CPINR: SIM PIN2,<retries>,<default_retries>
+CPINR: SIM PUK2,<retries>,<default_retries>
```

## 8.1.8 +CSIM, Generic SIM Access

### Description

This command allows a direct control of the SIM by a distant application on the TE.

### Syntax

Command	Possible Response(s)
AT+CSIM=<length>,<command>	+CSIM: <length>,<response> OK or +CME ERROR: <err>
AT+CSIM=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	<2s

### Defined Values

<length>: integer type; length of the characters that are sent to TE in <command> or <response> (two times the actual length of the command or response)

<command>: String type. Command passed on by the MT to the SIM in the format as described in 3GPP TS 51.011 (hexadecimal character format; refer +CSCS)

<response>: String type. Response to the command passed on by the SIM to the MT in the format as described in 3GPP TS 51.011 (hexadecimal character format; refer +CSCS)

## 8.1.9 +CRSM, Restricted SIM Access

### Description

This command provides limited access to the Elementary Files on the SIM. Access to the SIM database is restricted to the commands which are listed at <command>. All parameters of AT+CRSM are used as specified by 3GPP TS 51.011(2G) and TS 31.101(3G). As response to the command, the Modem sends the actual SIM information parameters and response data. Error result code "+CME ERROR" may be returned if the command cannot be transferred to the SIM, e.g. if the SIM is not inserted, or defected, or PIN1/PUK authentication required, or required input parameters not present. However, failure in the execution of the command in the SIM is reported in <sw1> and <sw2> parameters.

Some of the AT+CRSM commands require PIN/PIN2 authentication.

### Syntax

Command	Possible Response(s)
AT+CRSM=<command>[,<file_id>[,<P1>,<P2>,<P3>[,<data>[,<pathid>]]]]	+CRSM: <sw1>,<sw2>[,<response>] OK or +CME ERROR: <err>
AT+CRSM=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	<2s

### Defined Values

<command>: (command passed on by the MT to the SIM; refer 3GPP TS 51.011 [28]):

- 176 READ BINARY
- 178 READ RECORD
- 192 GET RESPONSE

- 214 UPDATE BINARY
- 220 UPDATE RECORD
- 242 STATUS
- 203 RETRIEVE DATA
- 219 SET DATA

all other values are reserved

Note1: The MT internally executes all commands necessary for selecting the desired file, before performing the actual command.

<fileid>: integer type; this is the identifier of a elementary datafile on SIM. Mandatory for every command except STATUS

Note2: The range of valid file identifiers depends on the actual SIM and is defined in 3GPP TS 51.011 [28]. Optional files may not be present at all.

<P1>, <P2>, <P3>: integer type; parameters passed on by the MT to the SIM. These parameters are mandatory for every command, except GET RESPONSE and STATUS. The values are described in 3GPP TS 51.011 [28]

<data>: String type. Information which shall be written to the SIM (hexadecimal character format; refer +CSCS)

<pathid>: string type; contains the path of an elementary file on the SIM/UICC in hexadecimal format as defined in ETSI TS 102 221 [60] (e.g. "7F205F70" in SIM and UICC case). The <pathid> shall only be used in the mode "select by path from MF" as defined in ETSI TS 102 221 [60].

Note3: Since valid elementary file identifiers may not be unique over all valid dedicated file identifiers the <pathid> indicates the targeted UICC/SIM directory path in case of ambiguous file identifiers. For earlier versions of this specification or if <pathid> is omitted, it could be implementation specific which one will be selected.

<sw1>, <sw2>: integer type; information from the SIM about the execution of the actual command. They can be refer TS102.221

<response>: String type. Response of a successful completion of the command previously issued (hexadecimal character format; refer +CSCS). STATUS and GET RESPONSE return data, which gives information about the current elementary datafield. This information includes the type of file and its size (refer 3GPP TS 51.011 [28]). After READ BINARY, READ RECORD or RETRIEVE DATA command the requested data will be returned. <response> is not returned after a successful UPDATE BINARY, UPDATE RECORD or SET DATA command.

# 9 Network

## 9.1 Network Commands

### 9.1.1 +CSQ, Signal Strength

#### Description

This command displays the received signal strength indication <rssi> and channel bit error rate <ber> from the Modem.

#### Syntax

Command	Possible Response(s)
AT+CSQ	+CSQ: <rssi>,<ber> OK
AT+CSQ?	+CSQ: <rssi>,<ber> OK
AT+CSQ=?	+CSQ: (list of supported <rssi>s),(list of supported <ber>s) OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

#### Defined Values

<rssi>: integer type

- 0 -113 dBm or less
- 1 -111 dBm
- 2...30 -109... -53 dBm
- 31 -51 dBm or greater
- 99 not known or not detectable

<ber>: integer type; channel bit error rate (in percent)

0...7 as RXQUAL values in the table in 3GPP TS 45.008 subclause 8.2.4

99 not known or not detectable

## 9.1.2 +CESQ, Extended Signal Quality

### Description

Execution command returns received signal quality parameters. If the current serving cell is not a GERAN cell, <rxlev> and <ber> are set to value 99. If the current serving cell is not a UTRA FDD or UTRA TDD cell, <rscp> is set to 255. If the current serving cell is not a UTRA FDD cell, <ecno> is set to 255. If the current serving cell is not an E-UTRA cell, <rsrq> and <rsrp> are set to 255.

### Syntax

Command	Possible Response(s)
AT+CESQ	+CESQ: <rxlev>,<ber>,<rscp>,<ecno>,<rsrq>,<rsrp> OK or +CME ERROR: <error>
AT+CESQ=?	+CESQ: (list of supported <rxlev>s),(list of supported <ber>s),(list of supported <rscp>s),(list of supported <ecno>s),(list of supported <rsrq>s),(list of supported <rsrp>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<rxlev>: integer type, received signal strength level (see 3GPP TS 45.008 subclause 8.1.4).

0 rssi < -110 dBm

1 -110 dBm ≤ rssi < -109 dBm

2  $-109 \text{ dBm} \leq \text{rssi} < -108 \text{ dBm}$

: : : :

61  $-50 \text{ dBm} \leq \text{rssi} < -49 \text{ dBm}$

62  $-49 \text{ dBm} \leq \text{rssi} < -48 \text{ dBm}$

63  $-48 \text{ dBm} \leq \text{rssi}$

99 not known or not detectable

<ber>: integer type; channel bit error rate (in percent)

0...7 as RXQUAL values in the table in 3GPP TS 45.008 subclause 8.2.4

99 not known or not detectable

<rscp>: integer type, received signal code power (see 3GPP TS 25.133 subclause 9.1.1.3 and 3GPP TS 25.123 subclause 9.1.1.1.3).

0  $\text{rscp} < -120 \text{ dBm}$

1  $-120 \text{ dBm} \leq \text{rscp} < -119 \text{ dBm}$

2  $-119 \text{ dBm} \leq \text{rscp} < -118 \text{ dBm}$

: : : :

94  $-27 \text{ dBm} \leq \text{rscp} < -26 \text{ dBm}$

95  $-26 \text{ dBm} \leq \text{rscp} < -25 \text{ dBm}$

96  $-25 \text{ dBm} \leq \text{rscp}$

255 not known or not detectable

<ecno>: integer type, ratio of the received energy per PN chip to the total received power spectral density (see 3GPP TS 25.133 subclause).

0  $\text{Ec/lo} < -24 \text{ dB}$

1  $-24 \text{ dB} \leq \text{Ec/lo} < -23.5 \text{ dB}$

2  $-23.5 \text{ dB} \leq \text{Ec/lo} < -23 \text{ dB}$

: : : :

47  $-1 \text{ dB} \leq \text{Ec/lo} < -0.5 \text{ dB}$

48  $-0.5 \text{ dB} \leq \text{Ec/lo} < 0 \text{ dB}$

49  $0 \text{ dB} \leq \text{Ec/lo}$

255 not known or not detectable

<rsrq>: integer type, reference signal received quality (see 3GPP TS 36.133 subclause 9.1.7).

0  $\text{rsrq} < -19.5 \text{ dB}$

1  $-19.5 \text{ dB} \leq \text{rsrq} < -19 \text{ dB}$

2  $-19 \text{ dB} \leq \text{rsrq} < -18.5 \text{ dB}$

: : : :

- 32  $-4 \text{ dB} \leq \text{rsrq} < -3.5 \text{ dB}$
- 33  $-3.5 \text{ dB} \leq \text{rsrq} < -3 \text{ dB}$
- 34  $-3 \text{ dB} \leq \text{rsrq}$
- 255 not known or not detectable

<rsrp>: integer type, reference signal received power (see 3GPP TS 36.133 subclause 9.1.4).

- 0  $\text{rsrp} < -140 \text{ dBm}$
- 1  $-140 \text{ dBm} \leq \text{rsrp} < -139 \text{ dBm}$
- 2  $-139 \text{ dBm} \leq \text{rsrp} < -138 \text{ dBm}$
- :
- :
- :
- :
- 95  $-46 \text{ dBm} \leq \text{rsrp} < -45 \text{ dBm}$
- 96  $-45 \text{ dBm} \leq \text{rsrp} < -44 \text{ dBm}$
- 97  $-44 \text{ dBm} \leq \text{rsrp}$
- 255 not known or not detectable

### 9.1.3 +CRLP, Radio Link Protocol

#### Description

This command is used to change the Radio Link Protocol(RLP) parameters used when non-transparent data calls are originated.

#### Syntax

Command	Possible Response(s)
AT+CRLP=[<iws>[,<mws>[,<T1>[,<N2>[ ,<ver>[,<T4>]]]]]]	OK or +CME ERROR: <err>
AT+CRLP?	+CRLP: <iws>,<mws>,<T1>,<N2>[,<ver1>[,<T4>]]][<CR><LF> > +CRLP: <iws>,<mws>,<T1>,<N2>[,<ver2>[,<T4>]]][...] OK
AT+CRLP=?	+CRLP: (list of supported <iws>s),(list of supported <mws>s), (list of supported <T1>s),(list of supported <N2>s)[,<ver1> [,(list of supported <T4>s)]]][<CR><LF> +CRLP: (list of supported <iws>s),(list of supported <mws>s),(list of supported <T1>s),(list of supported <N2>s)

Command	Possible Response(s)
	[,<ver2>[(list of supported <T4>s)]] [...] OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<ver>, <verx>: RLP version number in integer format; when version indication is not present it shall equal 0

NOTE: Version 0 and 1 share the same parameter set. Read and test commands shall return only one line for this set (where <verx> is not present).

<iws>: integer type; IWF to MS window size. Default value is 61 when RLP<ver0> and RLP<ver1>. Default value is 240 when RLP<ver2>

<mws>: integer type; MS to IWF window size. Default value is 61 when RLP<ver0> and RLP<ver1>. Default value is 240 when RLP<ver2>

<T1>: integer type; Acknowledgement timer T1. Default value is 48 when RLP<ver0> and RLP<ver1>. Default value is 52 when RLP<ver2>

<N2>: integer type; Retransmission attempts N2 in integer format (refer to GSM 04.22 subclause 5.4.3).  
Default: 6

<T4>: integer type; re-sequencing period T4. T1 and T4 are in units of 10ms

### 9.1.4 +CREG, Network Registration Status

#### Description

Set command controls the presentation of an unsolicited result code as below:

+CREG: <stat> when <n>=1 and there is a change in the MT's circuit mode network registration status in GERAN/UTRAN/E-UTRAN.

or

+CREG: <stat>[,<lac>],[<ci>],[<AcT>]] when <n>=2 and there is a change of the network cell in GERAN/UTRAN/E-UTRAN. The parameters <AcT>, <lac> and <ci> are sent only if available.

or

+CREG: <stat> [, <lac>,<ci>[,<AcT>[,<reject type>[,<reject cause>]]]] when <n>=3,when available, when the value of <stat> changes.

Read command returns the status of result code presentation and an integer <stat> which shows whether the network has currently indicated the registration of the MT. Location information elements <lac>, <ci> and <AcT>, if available, are returned only when <n>=2 and MT is registered in the network. The parameters [,<cause\_type>,<reject\_cause>], if available, are returned when <n>=3.

## Syntax

Command	Possible Response(s)
AT+CREG=<n>	OK or +CME ERROR: <err>
AT+CREG?	+CREG: <n>,<stat> [,<lac>,<ci>[,<AcT>[,<reject_type> [,<reject_cause>]]]] OK
AT+CREG=?	+CREG: (list of supported <n>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<n>: integer type; It is only applicable to L850 with <n>=3

- 0 disable network registration unsolicited result code; Default value
- 1 enable network registration unsolicited result code +CREG: <stat>
- 2 enable network registration and location information unsolicited result code  
+CREG: <stat>[,<lac>],<ci>[,<AcT>]]
- 3 enable network registration, location information and cause value information unsolicited result code +CREG: <stat>[,<lac>],<ci>[,<AcT>],<cause\_type>,<reject\_cause>]];

<stat>: integer type; circuit mode registration status

- 0 not registered, MT is not currently searching a new operator to register to

- 1 registered, home network
- 2 not registered, but MT is currently searching a new operator to register to
- 3 registration denied
- 4 unknown (e.g. out of GERAN/UTRAN/E-UTRAN coverage)
- 5 registered, roaming
- 6 registered for "SMS only", home network (applicable only when <AcT> indicates E-UTRAN)
- 7 registered for "SMS only", roaming (applicable only when <AcT> indicates E-UTRAN)
- 8 attached for emergency bearer services only (see NOTE 2) (not applicable)
- 9 registered for "CSFB not preferred", home network (applicable only when <AcT> indicates E-UTRAN)
- 10 registered for "CSFB not preferred", roaming (applicable only when <AcT> indicates E-UTRAN)

<lac>: string type; two byte location area code (when <AcT> indicates value 0 to 6), or tracking area code (when <AcT> indicates value 7). In hexadecimal format (e.g. "00C3" equals 195 in decimal).

<ci>: string type; four byte GERAN/UTRAN/E-UTRAN cell ID in hexadecimal format.

<AcT>: integer type; access technology of the serving cell

- 0 GSM
- 1 GSM Compact
- 2 UTRAN
- 3 GSM w/EGPRS (see NOTE 3)
- 4 UTRAN w/HSDPA (see NOTE 4)
- 5 UTRAN w/HSUPA (see NOTE 4)
- 6 UTRAN w/HSDPA and HSUPA (see NOTE 4)
- 7 E-UTRAN

NOTE 3: 3GPP TS 44.060 [71] specifies the System Information messages which give the information about whether the serving cell supports EGPRS.

NOTE 4: 3GPP TS 25.331 [74] specifies the System Information blocks which give the information about whether the serving cell supports HSDPA or HSUPA.

<reject\_type>: integer type; indicates the type of <reject\_cause>.

- 0 Indicates that <reject\_cause> contains an MM cause value, see 3GPP TS 24.008 [8] Annex G.
- 1 Indicates that <reject\_cause> contains a manufacturer specific cause.

<reject\_cause>: integer type; contains the cause of the failed registration. The value is of type as defined by <cause\_type>.

## 9.1.5 +CGREG, GPRS Network Registration

### Description

The set command controls the presentation of an unsolicited result code +CGREG: <stat> when <n>=1 and there is a change in the MT's GPRS network registration status in GERAN/UTRAN, or unsolicited result code +CGREG: <stat>[,<lac>],[<ci>],[<AcT>],[<rac>]] when <n>=2 and there is a change of the network cell in GERAN/UTRAN. The parameters <AcT>, <lac>, <rac> and <ci> are provided only if available. The value <n>=3 further extends the unsolicited result code with [,<cause\_type>,<reject\_cause>], when available, when the value of <stat> changes.

The read command returns the status of result code presentation and an integer <stat> which shows whether the network has currently indicated the registration of the MT. Location information elements <lac>, <ci>, <AcT> and <rac>, if available, are returned only when <n>=2 and MT is registered in the network.

Test command returns the range of supported network registration mode (i.e. <n>).

### Syntax

Command	Possible Response(s)
AT+CGREG=[<n>]	OK or +CME ERROR: <err>
AT+CGREG?	+CGREG: <n>,<stat>[,<lac>],[<ci>],[<AcT>],[<rac>][,<cause_type>,<reject_cause>]] OK
AT+CGREG=?	+CGREG: (list of supported <n>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<n>: integer type

- 0 disable network registration unsolicited result code; Default value
- 1 enable network registration unsolicited result code +CGREG: <stat>
- 2 enable network registration and location information unsolicited result code  
+CGREG: <stat>[,<[lac>,<[ci>,<[AcT>,<[rac>]]
- 3 enable network registration, location information and GMM cause value information unsolicited  
result code +CGREG: <stat>[,<[lac>,<[ci>,<[AcT>,<[rac>]],<[cause\_type>,<[reject\_cause>]]

<stat>: integer type; indicates the GPRS registration status

- 0 not registered, MT is not currently searching an operator to register to
- 1 registered, home network
- 2 not registered, but MT is currently trying to attach or searching an operator to register to
- 3 registration denied
- 4 unknown (e.g. out of GERAN/UTRAN coverage)
- 5 registered, roaming
- 6 registered for "SMS only", home network (not applicable)
- 7 registered for "SMS only", roaming (not applicable)
- 8 attached for emergency bearer services only (see NOTE 2) (applicable only when <AcT> indicates  
2,4,5,6)
- 9 registered for "CSFB not preferred", home network (not applicable)
- 10 registered for "CSFB not preferred", roaming (not applicable)

<lac>: string type; two byte location area code in hexadecimal format (e.g. "00C3" equals 195 in decimal)

<ci>: string type; four byte GERAN/UTRAN cell ID in hexadecimal format

<AcT>: integer type; indicates the access technology of the serving cell

- 0 GSM
- 1 GSM Compact
- 2 UTRAN
- 3 GSM w/EGPRS (see NOTE 3)
- 4 UTRAN w/HSDPA (see NOTE 4)
- 5 UTRAN w/HSUPA (see NOTE 4)
- 6 UTRAN w/HSDPA and HSUPA (see NOTE 4)
- 7 E-UTRAN (not applicable)

NOTE 3: 3GPP TS 44.060 [71] specifies the System Information messages which give the information about whether the serving cell supports EGPRS.

NOTE 4: 3GPP TS 25.331 [74] specifies the System Information blocks which give the information about

whether the serving cell supports HSDPA or HSUPA.

<rac>: string type; one byte routing area code in hexadecimal format

<cause\_type>: integer type; indicates the type of <reject\_cause>.

0 Indicates that <reject\_cause> contains a GMM cause value, see 3GPP TS 24.008 [8] Annex G.

1 Indicates that <reject\_cause> contains a manufacturer-specific cause.

<reject\_cause>: integer type; contains the cause of the failed registration. The value is of type as defined by <cause\_type>.

## 9.1.6 +CEREG, EPS Network Registration status

### Description

The set command controls the presentation of an unsolicited result code +CEREG:<stat> when <n>=1 and there is a change in the MT's EPS network registration status, or code +CEREG:

<stat>[,<tac>,<ci>[,<AcT>]] when <n>=2 and there is a change of the network cell, code +CEREG:

<stat>[,<tac>[,<ci>[,<AcT>[,<reject type>[,<reject cause>]]]]] when <n>=3.

### Syntax

Command	Possible Response(s)
AT+CEREG=[<n>]	OK or +CME ERROR: <err>
AT+CEREG?	when <n>=0, 1, 2 or 3, stat=0, 3 or 4, and command successful: +CEREG: <n>,<stat>[,<tac>[,<ci>[,<AcT>[,<cause_type>,<reject_cause>]]]] when <n>=0, 1, 2 or 3, stat=1 or 5, and command successful: +CEREG: <n>,<stat>[,<tac>[,<ci>[,<AcT>]]] when <n>=4 or 5 and command successful: +CEREG: <n>,<stat>[,<tac>[,<ci>[,<AcT>][,<cause_type>[,<reject_cause>][,<Active-Time>[,<Periodic-TAU>]]]]] OK

Command	Possible Response(s)
AT+CEREG=?	+CEREG: (list of supported <n>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<n>: integer type

- 0 disable network registration unsolicited result code; Default value
- 1 enable network registration unsolicited result code +CEREG: <stat>
- 2 enable network registration and location information unsolicited result code  
+CEREG: <stat>[,<tac>],[<ci>],[<AcT>]]
- 3 enable network registration, location information and EMM cause value information unsolicited result code +CEREG: <stat>[,<tac>],[<ci>],[<AcT>][,<cause\_type>,<reject\_cause>]]
- 4 For a UE that wants to apply PSM, enable network registration and location information unsolicited result code +CEREG: <stat>[,<tac>],[<ci>],[<AcT>][,],[<Active-Time>],[<Periodic-TAU>]]]]
- 5 For a UE that wants to apply PSM, enable network registration, location information and EMM cause value information unsolicited result code  
+CEREG: <stat>[,<tac>],[<ci>],[<AcT>][,<cause\_type>],[<reject\_cause>][,<Active-Time>],[<Periodic-TAU>]]]]

<stat>: integer type; indicates the EPS registration status

- 0 not registered, MT is not currently searching an operator to register to
- 1 registered, home network
- 2 not registered, but MT is currently trying to attach or searching an operator to register to
- 3 registration denied
- 4 unknown (e.g. out of E-UTRAN coverage)
- 5 registered, roaming
- 6 registered for "SMS only", home network (not applicable)
- 7 registered for "SMS only", roaming (not applicable)
- 8 attached for emergency bearer services only (See NOTE 2)
- 9 registered for "CSFB not preferred", home network (not applicable)

10 registered for "CSFB not preferred", roaming (not applicable)

<ta>: string type; two byte tracking area code in hexadecimal format (e.g. "00C3" equals 195 in decimal)

<ci>: string type; four byte E-UTRAN cell ID in hexadecimal format

<AcT>: integer type; indicates the access technology of the serving cell

0 GSM (not applicable)

1 GSM Compact (not applicable)

2 UTRAN (not applicable)

3 GSM w/EGPRS (see NOTE 3) (not applicable)

4 UTRAN w/HSDPA (see NOTE 4) (not applicable)

5 UTRAN w/HSUPA (see NOTE 4) (not applicable)

6 UTRAN w/HSDPA and HSUPA (see NOTE 4) (not applicable)

7 E-UTRAN

NOTE 3: 3GPP TS 44.060 [71] specifies the System Information messages which give the information about whether the serving cell supports EGPRS.

NOTE 4: 3GPP TS 25.331 [74] specifies the System Information blocks which give the information about whether the serving cell supports HSDPA or HSUPA.

<cause\_type>: integer type; indicates the type of <reject\_cause>.

0 Indicates that <reject\_cause> contains an EMM cause value, see 3GPP TS 24.301 [83] Annex A.

1 Indicates that <reject\_cause> contains a manufacturer-specific cause.

<reject\_cause>: integer type; contains the cause of the failed registration. The value is of type as defined by <cause\_type>.

## 9.1.7 +COPS, Operator Selection

### Description

This command enables accessories to access the network registration information, and the selection and registration of the GSM/UMTS network operator.

The Modem is registered in the Home network.

The Enhanced Operator Name String (EONS) feature enables the Modem to return the operator name displayed on the handset.

This feature allows the SIM card to store a mapping of MCC/MNC code pairs to the displayed operator name. As a result, several operators can share a single network while having their handsets display their own name as the network operator.

Testing the enhanced ONS feature requires a "SIM ONS" SIM card.

## Syntax

Command	Possible Response(s)
AT+COPS=[<mode>[,<format>,<oper>[,<AcT>]]]]	OK or +CME ERROR: <err>
AT+COPS?	+COPS: <mode>[,<format>,<oper>[,<AcT>]] OK or +CME ERROR: <err>
AT+COPS=?	+COPS: [list of supported (<stat>,long alphanumeric <oper>,short alphanumeric <oper>,numeric <oper>[,<AcT>])s][,.(list of supported <mode>s),(list of supported <format>s)] OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 3Min

## Defined Values

<mode>: integer type

- 0 automatic (<oper> field is ignored); Default value
- 1 manual (<oper> field shall be present, and <AcT> optionally)
- 2 deregister from network
- 3 set only <format> (for read command +COPS?), do not attempt registration/deregistration (<oper> and <AcT> fields are ignored); this value is not applicable in read command response
- 4 manual/automatic (<oper> field shall be present); if manual selection fails, automatic mode (<mode>=0) is entered

<format>: integer type

- 0 long format alphanumeric <oper>; Default value
- 1 short format alphanumeric <oper>

2 numeric <oper>

<oper>: string type; <format> indicates if the format is alphanumeric or numeric; long alphanumeric format can be upto 16 characters long and short format up to 8 characters (refer GSM MoU SE.13 [9]); numeric format is the GSM Location Area Identification number (refer 3GPP TS 24.008 subclause 10.5.1.3) which consists of a three BCD digit country code coded as in ITU-T Recommendation E.212 [10] Annex A, plus a two BCD digit network code, which is administration specific; returned <oper> shall not be in BCD format, but in IRA characters converted from BCD; hence the number has structure: (country code digit 3)(country code digit 2)(country code digit 1)(network code digit 3)(network code digit 2)(network code digit 1)

<stat>: integer type

- 0 unknown
- 1 available
- 2 current
- 3 forbidden

<AcT>: integer type; access technology selected

- 0 GSM
- 1 GSM Compact
- 2 UTRAN
- 3 GSM w/EGPRS (see NOTE 1)
- 4 UTRAN w/HSDPA (see NOTE 2)
- 5 UTRAN w/HSUPA (see NOTE 2)
- 6 UTRAN w/HSDPA and HSUPA (see NOTE 2)
- 7 E-UTRAN
- 8 CDMA
- 9 CDMA&EVDO
- 10 EVDO
- 11 eMTC
- 12 NB-IoT

Note1: 3GPP TS 44.060 [71] specifies the System Information messages which give the information about whether the serving cell supports EGPRS.

Note2: 3GPP TS 25.331 [74] specifies the System Information blocks which give the information about whether the serving cell supports HSDPA or HSUPA.

## 9.1.8 +CPLS, Selection of Preferred PLMN List

### Description

This command is used to select one PLMN selector with Access Technology list in the SIM card or active application in the UICC (GSM or USIM), that is used by +CPOL command.

### Syntax

Command	Possible Response(s)
AT+CPLS=[<list>]	OK or +CME ERROR: <err>
AT+CPLS?	+CPLS: <list> OK
AT+CPLS=?	+CPLS: (list of supported <list>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<list>: integer type

- 0 User controlled PLMN selector with Access Technology EFPLMNwAcT, if not found in the SIM/UICC then PLMN preferred list EFPLMNsel (this file is only available in SIM card or GSM application selected in UICC)
- 1 Operator controlled PLMN selector with Access Technology EFOPLMNwAcT
- 2 HPLMN selector with Access Technology EFHPLMNwAcT

## 9.1.9 +CPOL, Preferred Operators

### Description

This command is used to edit the PLMN selector lists in the SIM card or active application in the UICC (GSM or USIM).

If no list has been previously selected, the EFPLMNwAcT - user controlled PLMN selector with Access Technology list, is the one accessed by default.

### Syntax

Command	Possible Response(s)
AT+CPOL=[<index>][,<format>,<oper>][,<GSM_AcT>,<GSM_Compact_AcT>,<UTRAN_AcT>,<EUTRAN_AcT>]]]	OK or +CME ERROR: <err>
AT+CPOL?	+CPOL: <index1>,<format>,<oper1>[,<GSM_AcT1>,<GSM_Compact_AcT1>,<UTRAN_AcT1>,<E-UTRAN_AcT1>] [<CR><LF>+CPOL: <index2>,<format>,<oper2>[,<GSM_AcT2>,<GSM_Compact_AcT2>,<UTRAN_AcT2>,<E-UTRAN_AcT2>] [...]] OK or +CME ERROR: <err>
AT+CPOL=?	+CPOL: (list of supported<index>s),(list of supported<format>s) OK or +CME ERROR: <err>

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<indexn>: integer type; the order number of operator in the SIM/USIM preferred operator list

<format>: integer type

- 0 long format alphanumeric <oper>; Default value
- 1 short format alphanumeric <oper>
- 2 numeric <oper>

<opern>: string type; <format> indicates if the format is alphanumeric or numeric (see +COPS)

<GSM\_AcTn>: integer type; GSM access technology:

- 0 access technology not selected
- 1 access technology selected

<GSM\_Compact\_AcTn>: integer type; GSM compact access technology

- 0 access technology not selected
- 1 access technology selected

<UTRAN\_AcTn>: integer type; UTRAN access technology

- 0 access technology not selected
- 1 access technology selected

<E-UTRAN\_AcTn>: integer type; E-UTRAN access technology

- 0 access technology not selected
- 1 access technology selected

## 9.1.10 +GTRAT, Selection of Radio Access Technology

### Description

This command is used to manually select Radio Access Technology (RAT) to register network. After you input this set command, the executed result will be returned immediately then device attempts to register specified RAT. In case of GSM / UMTS, GSM/LTE or UMTS/LTE Dual-Mode is selected additionally a preferred RAT can be configured, which is stored in NVRAM selecting which RAT shall be attached first. In case of GSM/UMTS/LTE Triple Mode is selected, additionally a first preferred RAT and a second preferred RAT can be configured to set the searching order of available RATs.

Set command is used to set RAT and preferred RAT value used for further network registration (at+cops=0).

Read command returns the previously set of <Act> and <PreferredAct> values.

Test command returns the range of supported <Act> and <PreferredAct> values.

### Syntax

Command	Possible Response(s)
AT+GTRAT=<AcT> [,<PreferredAct1>[,	OK

Command	Possible Response(s)
<PreferredAct2>]]	or +CME ERROR: <err>
AT+GTRAT?	+GTRAT : <Act>[,<PreferredAct1>[,<PreferredAct2>]] OK
AT+GTRAT=?	+GTRAT: (list of supported <AcT>s),(list of supported <PreferredAct1>s),(list of supported <PreferredAct2>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	Yes	< 1s

### Defined Values

<AcT>: integer type; indicates the radio access technology and may be

- 0 GSM
- 3 LTE
- 5 LTE/GSM
- 10 Automatic

<PreferredAct1>: integer type; Selected parameter must be a part of <Act>

- 0 GSM is preferred
- 3 LTE is preferred

<PreferredAct2>: integer type; Selected parameter must be a part of <Act>

- 0 GSM is secondary preferred
- 3 LTE is secondary preferred

## 9.1.11 +GTACT, Select RAT and BAND

### Description

This command allows to switch between all the allowed RATs and BANDs for air interface access.

After you input this set command, the executed result will be returned immediately then device attempts to register specified RAT and bands

## Syntax

Command	Possible Response(s)
AT+GTACT=[<rat>[, [<PreferredAct1>], [<PreferredAct2>] [, <band_1>[, <band_2>[, .....[, <band_n>]]]]]]	OK or +CME ERROR: <err>
AT+GTACT?	+GTACT: [<rat>[, [<PreferredAct1>], [<PreferredAct2>] [, <band_1>[, <band_2>[, .....[, <band_n>]]]]]]
AT+GTACT=?	+GTACT: (list of supported <Rat>s), (list of supported <PreferredAct1>s), (list of supported <PreferredAct2>s), (list of supported <gsm_band>s), (list of supported <umts_band>s), (list of supported <lte_band>s), (list of supported <cdma_band>s), (list of supported <evdo_band>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<rat>: integer type

- 0 GSM
- 2 LTE
- 5 LTE/GSM
- 10 Automatic

<PreferredAct1>: integer type; Selected parameter must be a part of <Act>

- 0 GSM is preferred
- 3 LTE is preferred

<PreferredAct2>: integer type; Selected parameter must be a part of <Act>

- 0 GSM is preferred

3 LTE is preferred

<Band\_1>,<Band\_2>....<Band\_n>: integer type

<gsm\_band>:

900 selection of 900 MHz band

1800 selection of 1800 MHz band

<lte\_band>:

101 BAND\_LTE\_1

103 BAND\_LTE\_3

105 BAND\_LTE\_5

108 BAND\_LTE\_8

134 BAND\_LTE\_34

139 BAND\_LTE\_39

140 BAND\_LTE\_40

141 BAND\_LTE\_41

Note 1: This command gives a flexibility to configure Either RAT/Preferred RAT/BAND. So user can configure only RAT or Band also.

Note 2: If only Band has to be configured then first 3 parameter has to be blank. So the command looks like:

AT+GTACT=,,,160, 155 (ex: to configure LTE band 60 and LTE band 55 ).

Note 3: If the RAT information is not provided then the second and third parameter will be ignored as it belongs to Preferred RAT. In case of Dual mode only one parameter (2nd param) is valid and third parameter will be ignored. Ex: AT+GTACT= 3, 0, 1 => here 1 will be ignored.

Note 4: For triple mode preferred act1 and preferred act2 will be taken as mentioned in the table below. All other combinations except these will be rejected.

Note 5: LTE parameters should be used only for the LTE platforms. In other case the behavior is not defined.

Note 6: Band changes for one particular RAT will not affect the other RAT configuration.

Ex: Setting LTE bands will not change anything on GSM/UMTS bands.

RAT Combination Table For Triple Mode:

Preferred Act1	Preferred Act2	RAT Combination List		
Not stated	Not stated	RAT_LTE	RAT_UMTS	RAT_GSM
0	Not stated	RAT_GSM	RAT_LTE	RAT_UMTS

Preferred Act1	Preferred Act2	RAT Combination List		
1	Not stated	RAT_UMTS	RAT_LTE	RAT_GSM
2	Not stated	RAT_LTE	RAT_UMTS	RAT_GSM
0	1	RAT_GSM	RAT_UMTS	RAT_LTE
0	2	RAT_GSM	RAT_LTE	RAT_UMTS
1	0	RAT_UMTS	RAT_GSM	RAT_LTE
1	2	RAT_UMTS	RAT_LTE	RAT_GSM
2	0	RAT_LTE	RAT_GSM	RAT_UMTS
2	1	RAT_LTE	RAT_UMTS	RAT_GSM

### 9.1.12 +GTCELLLOCK, Configure Cell lock information

#### Description

GTCELLLOCK command is used to force UE to register on the specified cell. (Fixed cell and frequency)

#### Syntax

Command	Possible Response(s)
AT+GTCELLLOCK=<mode>[,<rat>,<type>,<earfcn>[,<PCI>]]	OK or +CME ERROR: <error>
AT+GTCELLLOCK?	+GTCELLLOCK: <mode>[,<rat>,<type>,<earfcn>[,<PCI>]] OK
AT+GTCELLLOCK=?	+GTCELLLOCK: (list of supported < mode >s), (list of supported < rat >s),(list of supported < type>s), (list of supported < earfcn >s), (list of supported < PCI >s) OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	Yes	Yes	No	< 1s

## Defined Values

< mode >: integer type;

- 0 Disable this function
- 1 Enable this function

< rat >: integer type;

- 0 LTE
- 1 GSM

< type >: integer type;

- 0 Lock PCI
- 1 Lock frequency

< earfcn >: integer type;

the range is 0-

< PCI >: integer type;

the range is 0-503 for LTE.

Note 1: If User want to lock the PCI registered before powering off, please input AT+GTCELLLOCK=1

Note 2: If user want to change different SIM card, please disable this feature first.

## 9.1.13 +GTCCINFO, Get Cell Current Information

### Description

This command acquires the current information of cell.

Note: make sure execute +GTSCANSTAT command first then execute this command to get valid information

### Syntax

Command	Response/Action
AT+GTCCINFO?	+GTCCINFO: 1.GSM (a maximum of ten GSM cells are supported) GSM service cell: <IsServiceCell>,<rat>,<mcc>,<mnc>,<lac>,<cellid>,<arfcn>,<basic>,<band>,<txpwr>, <dtx_used>,<c1>,<c2>,<access_tech>,<amr_acs>,<maio>,<hsn>,<rxlevsub>,<rxlevf ull>,<rxqualsub>,<rxqualfull>,<rxlev>,<rsqi>,<ber_lev>

Command	Response/Action
	<p>GSM neighbor cell:</p> <pre>&lt;IsServiceCell&gt;,&lt;rat&gt;,&lt;mcc&gt;,&lt;mnc&gt;,&lt;lac&gt;,&lt;cellid&gt;,&lt;arfcn&gt;,&lt;basic&gt;,&lt;c1&gt;,&lt;c2&gt;,&lt;c31&gt;,&lt;c32&gt;,&lt;rxlev&gt;,&lt;rssr&gt;</pre> <p>2.UMTS ( a maximum of ten GSM cells are supported )</p> <p>UMTS service cell:</p> <pre>&lt;IsServiceCell&gt;,&lt;rat&gt;,&lt;mcc&gt;,&lt;mnc&gt;,&lt;lac&gt;,&lt;cellid&gt;,&lt;uarfcn&gt;,&lt;psc&gt;,&lt;band&gt;,&lt;ecno&gt;,&lt;rscp&gt;,&lt;rac&gt;,&lt;rxlev&gt;,&lt;reserved&gt;,&lt;Ec/Io_lev&gt;</pre> <p>UMTS neighbor cell:</p> <pre>&lt;IsServiceCell&gt;,&lt;rat&gt;,&lt;mcc&gt;,&lt;mnc&gt;,&lt;lac&gt;,&lt;cellid&gt;,&lt;uarfcn&gt;,&lt;psc&gt;,&lt;cell_type&gt;,&lt;rank_pos&gt;,&lt;ranking_status&gt;,&lt;ecno&gt;,&lt;pathloss&gt;,&lt;rxlev&gt;,&lt;rscp&gt;</pre> <p>3.LTE/eMTC/NB-IoT ( a maximum of ten LTE cells are supported )</p> <p>LTE/eMTC/NB-IoT service cell:</p> <pre>&lt;IsServiceCell&gt;,&lt;rat&gt;,&lt;mcc&gt;,&lt;mnc&gt;,&lt;tac&gt;,&lt;cellid&gt;,&lt;earfcn&gt;,&lt;physicalcellId&gt;,&lt;band&gt;,&lt;bandwidth&gt;,&lt;rssnr_value&gt;,&lt;rxlev&gt;,&lt;rsrp&gt;,&lt;rsrq&gt;</pre> <p>LTE/eMTC/NB-IoT neighbor cell:</p> <pre>&lt;IsServiceCell&gt;,&lt;rat&gt;,&lt;mcc&gt;,&lt;mnc&gt;,&lt;tac&gt;,&lt;cellid&gt;,&lt;earfcn&gt;,&lt;physicalcellId&gt;,&lt;bandwidth&gt;,&lt;rxlev&gt;,&lt;rsrp&gt;,&lt;rsrq&gt;</pre> <p>OK</p> <p>4.CDMA/EVDO ( a maximum of ten GSM cells are supported )</p> <p>CDMA/EVDO service cell:</p> <pre>&lt;IsServiceCell&gt;,&lt;rat&gt;,&lt;SystemID&gt;,&lt;NetworkID&gt;,&lt;BaselD&gt;,&lt;ZONE_ID&gt;,&lt;Pilot_PN&gt;,&lt;Pilot_Strength&gt;,&lt;Channel&gt;,&lt;Longitude&gt;,&lt;Latitude&gt;</pre> <p>CDMA/EVDO neighbor cell:</p> <pre>&lt;IsServiceCell&gt;,&lt;rat&gt;,&lt;SystemID&gt;,&lt;NetworkID&gt;,&lt;BaselD&gt;,&lt;ZONE_ID&gt;,&lt;Pilot_PN&gt;,&lt;Pilot_Strength&gt;,&lt;Channel&gt;,&lt;Longitude&gt;,&lt;Latitude&gt;</pre>

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 3s

## Defined Values

<IsServiceCell>: integer type

- 1 Service Cell
- 2 Not Service Cell

<rat>: integer type; access technology

- 0 Invalid network
- 1 GSM
- 2 WCDMA
- 3 TDSCDMA
- 4 LTE
- 5 eMTC
- 6 NB-IoT
- 7 CDMA
- 8 EVDO

<cell\_id>: integer type and range is 0-0xFFFFFFFF

<mcc>: integer type; Mobile Country Code

<mnc>: integer type; Mobile Network Code

<lac>: integer type and range is 0-0xFFFF; Location Area Code

<arfcn>: integer type and range is 0-65535; Absolute Radio Frequency Channel Number

<basic>: integer type; Base station identification code

<band>: integer type. Note: <band>= BAND\_INVALID if not register network.

When register GSM:

- 900: 900 MHz band
- 1800: 1800 MHz band
- 1900: 1900 MHz band
- 850: 850 MHz band
- 450: 450 MHz band
- 480: 480 MHz band
- 380: 380 MHz band

410: 410 MHz band

710: 710 MHz band

810: 810 MHz band

750: 750 MHz band

When register WCDMA:

BAND\_UMTS\_I - BAND\_UMTS\_XXII.

When register TDSCDMA:

BAND\_UMTS\_TDD\_A - BAND\_UMTS\_TDD\_F.

When register LTE:

BAND\_LTE\_1 - BAND\_LTE\_43.

<rxlev>: integer type and range is 0-255.

For GSM:

0 less than 110 dBm.

1 110 dBm to 109 dBm.

2 109 dBm to 108 dBm.

:

62 49 dBm to 48 dBm.

63 greater than 48 dBm.

99 not known or not detectable

For WCDMA or TDSCDMA:

0 Rscp < -120dbm

1 -120dbm <= Rscp < -119dbm

:

96 -25dbm <= Rscp

For LTE:

0 RSRP < -140dbm

1 -140dbm <= RSRP < -139dbm

:

96 -45dbm <= RSRP < -44dbm

97 -44dbm <= RSRP

<txpwr>: integer type and range is 0-255; TX power

<DrxUsed>: integer type and range is 0-255;

<c1>: integer type;

<c2>: integer type;

<access\_tech>: integer type and range is 0-255; Access technology

- 0 GSM
- 1 GPRS
- 2 EGPRS
- 3 EGPRS PCR
- 4 EGPRS EPCR
- 5 UMTS
- 6 DTM
- 7 EGPRS DTM
- 8 LTE
- 9 UNDEFINED.

<Maio>: integer type and range is 0-63; Mobile allocation index offset.

<amr\_acs>: integer type and range is 0-255; AMR active codec.

<hsn>: integer type and range is 0-63; Hopping sequence number

<RxlevSub>: integer type and range is 0-255;

<RxlevFull>: integer type and range is 0-255;

<RxqualSub>: integer type and range is 0-255;

<RxqualFull>: integer type and range is 0-255;

<AmrActiveCodec>: integer type and range is 0-255; Amr Active Codec

- 1 4.75 kbit/s codec rate
- 2 5.15 kbit/s codec rate
- 3 5.90 kbit/s codec rate
- 4 6.70 kbit/s codec rate
- 5 7.40 kbit/s codec rate
- 6 7.95 kbit/s codec rate
- 7 10.2 kbit/s codec rate
- 8 12.2 kbit/s codec rate

<c31>: integer type and range is 0-255;

<c32>: integer type and range is 0-255;

<dl\_uarfcn>: integer type and range is 0-0xFFFF; Downlink uarfcn

<psc>: integer type and range is 0-0xFFFF; Primary scrambling code

<ecno>: integer type and range is 0-255;

<rac>: integer type and range is 0-255; Route area code

<service\_qual>: integer type and range is 0-0xFFFF

<cell\_type>: integer type and range is 0-255

- 0 Cell belongs to the Active set (CELL\_DCH)
- 1 Cell belongs to the Virtual Active set (CELL\_DCH)
- 2 Cells in the SIB 11/12 "BA"-list
- 3 Cell is a detected UMTS cell (CELL\_DCH)
- 4 Cell is a UMTS neighbor cell in GSM mode
- 5 Cell is a UMTS neighbor cell (all states but CELL\_DCH)
- 6 Cell is a UMTS neighbor cell (all states but CELL\_DCH)

<rank\_pos>: integer type and range is 0-255; Cell reselection ranking of the cell (0 for the best cell) and this value is used to order UMTS and GSM cells for the presentation

<ranking\_value>: integer type and range is 0-255; Reason why the cell was not ranked

- 0 Cell is available
- 1 No measurement results available
- 2 Cell is barred
- 3 Wrong PLMN
- 4 Removed due to H criteria priority (HCS active)
- 5 Removed due to HCS priority
- 6 Removed due to cell selection criteria

<pathloss>: integer type and range is 0-0xFF and 0xFF if not Available.

<tac>: integer type and range is 0-0xFFFF; Tracking Area Code.

<earfcn>: integer type and range is 0-0xFFFFFFFF; EUTRA Absolute Radio Frequency Channel Number

<physicalcellid>: integer type and range is 0-0xFFFFFFFF; physical cell Id

<bandwidth>: integer type and range is 0-255;

<rssnr\_value>: integer type and range is -100-100; Radio Signal Strength Noise Ratio

- 100:  $RSSNR \leq -50\text{dB}$ ;
- 99:  $-50\text{dB} < RSSNR \leq -49.5\text{dB}$ ;
- 98:  $49.5\text{dB} < RSSNR \leq -49\text{dB}$ ;
- .....
- 1:  $-1\text{dB} < RSSNR \leq -0.5\text{dB}$ ;
- 0:  $-0.5\text{dB} < RSSNR \leq 0\text{dB}$ ;
- 1:  $0\text{dB} < SSNR \leq 0.5\text{dB}$ ;
- .....
- 98:  $49\text{dB} < RSSNR \leq 49.5\text{dB}$ ;
- 99:  $49.5\text{dB} < RSSNR \leq 50\text{dB}$ ;

100: 50dB < RSSNR;

255: Invalid value. not known or not detectable

<rsrp> : integer type and range is 0-255; Reference Signal Receive Power.

Note: 0 means less than -140 dBm or not detectable

<rsrq> : integer type and range is 0-255; Reference Signal Receive Quality

0 RSRQ < -19.5dB

1 -19.5dB <= RSRQ < -19.0dB

:

33 -3.5dB <= RSRQ < -3.0dB

34 -3.0dB <= RSRQ

<rssi>: integer type and range is 0-255; Received Signal Strength Indicator.

Note: 0 means less than -110 dBm or not detectable

<rscp>: integer type and range is 0-255; Received Signal Code Power

Note: 0 means less than -120 dBm or not detectable.

<ber\_lev>: integer type and range is 0-255; bit error rate level

0 .. BER < 0,2 %

1 .. 0,2 % < BER < 0,4 %

2 .. 0,4 % < BER < 0,8 %

3 .. 0,8 % < BER < 1,6 %

4 .. 1,6 % < BER < 3,2 %

5 .. 3,2 % < BER < 6,4 %

6 .. 6,4 % < BER < 12,8 %

7 .. 12,8 % < BER

<Ec/Io\_lev>: integer type and range is 0-49; CPICH Ec/Io level

0 CPICH Ec/Io < -24dB;

1 -24dB <= CPICH Ec/Io < -23.5dB;

.....

49 0dB<= CPICH Ec/Io dB;

<SystemID>: integer type and range is 0-65535;

<NetworkID>: integer type and range is 0-65535;

<BaseID>: integer type and range is 0-65535;

<ZONE\_ID>: integer type and range is 0-65535;

<Pilot\_PN>: integer type and range is 0-65535;

<Pilot\_Strength>: integer type and range is 0-65535;

<Channel>: integer type and range is 0-65535;

<Longitude>: integer type and range is -648000 -- 648000, unit: second;

<Latitude>: integer type and range is -324000 -- 324000, unit: second;

## 9.1.14 +COPN, Read Operator Names

### Description

This Execution command returns the list of operator names from the ME. Each operator code <numeric\_n> that has an alphanumeric equivalent <alpha\_n> in the ME memory shall be returned.

### Syntax

Command	Possible Response(s)
AT+COPN	+COPN: <numeric1>,<alpha1> [<CR><LF>+COPN: <numeric2>,<alpha2> [...]] OK or +CME ERROR: <err>
AT+COPN=?	OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	No	Yes	Yes	< 1s

### Defined Values

<numericn>: string type; operator in numeric format (see +COPS)

<alphan>: string type; operator in long alphanumeric format (see +COPS)

Note: If matching PLMN name is not found then numeric PLMN id (MCCMNC) will be displayed

## 9.1.15 +CEMODE, UE modes of operation for EPS

### Description

This command is used to set the MT to operate according to the specified mode of operation for EPS.

### Syntax

Command	Possible Response(s)
AT+CEMODE=[<mode>]	OK or +CME ERROR: <err>
AT+CEMODE?	+CEMODE: <mode> OK
AT+CEMODE=?	+CEMODE: (list of supported <mode>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<mode>: integer type; indicates the mode of operation. The default value is depended on the target products.

- 0 PS mode 2 of operation
- 1 CS/PS mode 1 of operation.
- 2 CS/PS mode 2 of operation.
- 3 PS mode 1 of operation

NOTE: The definition for UE modes of operation can be found in 3GPP TS 24.301 [83]

## 9.1.16 +MCELL, Module Cell Description

### Description

This command displays information about the Cellular Network. The information is divided throughout 21 screens, each of them with different parameters data.

Note: screen\_num just support 21 and 26;

## Syntax

Command	Syntax	Response/Action	Remarks
Set	+MCELL=<mode>, <screen_num>	OK or +CME ERROR: <err>	The Set command will return "OK" only. The relevant <screen_info> will return back with +MCELL format few seconds later.
Read	+MCELL?	OK	The Read command just returns OK and does nothing.
Test	+MCELL=?	+MCELL: (list of supported <mode>s), (list of supported <screen_num>s) OK	The Test command returns the possible <mode> & <screen_num> values.

## Attributes

The following table shows the +MCELL parameters.

<Parameter>	Description
<mode>	0 One shot requested.
<screen_num>	The requested screen number - An integer number. 1 Serving Idle Information screen 2 Circuit Switched Serving Cell Information screen 3 Miscellaneous Information screen 4 Uplink Data Transfer screen 5 Downlink Data Transfer screen 6 Neighbor 1 Cell Information screen 7 Neighbor 2 Cell Information screen 8 Neighbor 3 Cell Information screen 9 Neighbor 4 Cell Information screen 10 Neighbor 5 Cell Information screen 11 Neighbor 6 Cell Information screen 12 Neighbor Cells Summary screen 13 Re-selection screen 14 Hopping Information screen

<Parameter>	Description
	15 PDP1 Context Information screen 16 PDP2 Context Information screen 17 PDP3 Context Information screen 18 PDP4 Context Information screen 19 Serving Cell paging parameters 20 Optional SYSINFOS 21 Serving and Neighbor Cells Information screen 22 Serving Cell Information screen 23 Neighbor Cells Information screen 24 The LAC and Cell ID of Serving and Neighbor Cells I 26 Serving and Neighbor Cells Information screen

### 9.1.17 +MCELL Indication

#### Description

After AT+MCELL command, the information about the Cellular Network will return back by this +MCELL indication format few seconds later.

+MCELL: <screen\_title><CR><LF><screen\_info><CR><LF>

#### Syntax

<Parameter>	Description
<screen_title>	The requested screen title is written on the first line of each screen.
<screen_info>	The requested screen information.

<screen title>	Description	<screen num>
Serving Idle/PI	Idle/Packet Idle mode; Serving Cell Information screen.	1
Serving CS/TBF	Circuit Switched mode; Serving Cell Information screen.	2
Serving Misc	Idle/Packet Idle mode; Miscellaneous Information screen.	3

<screen title>	Description	<screen num>
Uplink Transfer	Dedicated/TBF modes; Uplink Data Transfer screen.	4
Downlink Transfer	Dedicated/TBF modes; Downlink Data Transfer screen.	5
Adjacent Cell x	Neighbor Cell Information screen. x - index cell.	6-11
Neighbors	Neighbor Cells Summary screen.	12
Reselection	Re-selection screen.	13
Hopping Info	Dedicated/TBF modes; Hopping Information screen.	14
PDP Context	PDP Context Information screen	15-18
GPRS-Parameters	Idle/Packet Idle mode; GPRS parameters.	19
SysInfos	Idle/Packet Idle mode; Optional SYSINFO.	20
Serving and Neighbors	Serving and Neighbor Cells Information screen	21
Serving Cell	Serving Cell Information screen	22
Neighbor Cells	Neighbor Cells Information screen	23
Serving and Neighbors	The LAC and Cell ID of Serving and Neighbor Cells I	24

Example:

AT+MCELL=0,21

OK

MCC:460,MNC:0,LAC:09339,Cell ID:03600,BSIC:027,(P)BCCH  
ARFCN:0076,RxLev:057,RxDbm:-53

MCC:460,MNC:0,LAC:09339,Cell ID:04361,BSIC:041,(P)BCCH  
ARFCN:0082,RxLev:035,RxDbm:-75

MCC:460,MNC:0,LAC:09339,Cell ID:04362,BSIC:038,(P)BCCH  
ARFCN:0060,RxLev:009,RxDbm:-101

MCC: -1,MNC:255,LAC:00000,Cell ID:65535,BSIC:255,(P)BCCH  
ARFCN:0000,RxLev:000,RxDbm:-110

MCC: -1,MNC:255,LAC:00000,Cell ID:65535,BSIC:255,(P)BCCH  
ARFCN:0000,RxLev:000,RxDbm:-110

MCC: -1,MNC:255,LAC:00000,Cell ID:65535,BSIC:255,(P)BCCH  
ARFCN:0000,RxLev:000,RxDbm:-110

MCC: -1,MNC:255,LAC:00000,Cell ID:65535,BSIC:255,(P)BCCH

ARFCN:0000,RxLev:000,RxDbm:-110

AT+MCELL=0,26

MCC:460,MNC:0,LAC:09339,Cell ID:03600,BSIC:027,(P)BCCH

ARFCN:0076,RxLev:057,RxDbm:-53

MCC:460,MNC:0,LAC:09339,Cell ID:04361,BSIC:041,(P)BCCH

ARFCN:0082,RxLev:035,RxDbm:-75

MCC:460,MNC:0,LAC:09339,Cell ID:04362,BSIC:038,(P)BCCH

ARFCN:0060,RxLev:009,RxDbm:-101

OK

## 10 Hardware Information

### 10.1 UART Parameter Commands

#### 10.1.1 +IPR, Fixed DTE Rate

##### Description

This command specifies the data rate at which the DCE will accept commands. The full range of data rate values may be reduced dependent on HW or other criteria.

##### Syntax

Command	Possible Response(s)
AT+IPR=<baud_rate>	OK or +CME ERROR: <err>
AT+IPR?	+IPR: <baud_rate> OK
AT+IPR=?	+IPR: (list of supported <baud_rate>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	Yes	< 1s

## Defined Values

<baud\_rate>: integer type; e.g. 0 (default), 1200, 2400, 4800, 9600, 14400, 19200, 28800, 33600, 38400, 57600, 115200, 230400, 460800, 921600.

Note: <baud\_rate>=0 means automatic detection. And the supported auto baud rate detect as following: 1200, 2400, 4800, 9600, 14400, 19200, 28800, 33600, 38400, 57600, 115200, 230400

Note: the supported baud rate depends on the target.

### 10.1.2 +CBAUD, Baud Rate Regulation

#### Description

This command sets the uniquely UART baud rate. The baud rate of the modem will be change/set to the request value <rate>.

Specifying a value of 0, 1 or 9 allows operation only at rates automatically detectable by the modem. The specified rate takes effect following the issuing of any result code(s) associated with the current command line.

In auto baud rate detection, an AT command must be sent to the modem firstly. After received any AT command, the module will lock on the single detected baud rate (this AT command will be lost and cannot get response from the modem). A +CBAUD Read command can feedback the currently in-use baud rate.

The module cannot be changed to auto baud without send AT+CBAUD=0, 1 or 9 command or after power cycle.

The parameter can't be saved after a power cycle.

Note:

For L610, the auto baud rate detection supports the following baud rates: 1200, 2400, 4800, 9600, 14400, 19200, 28800, 33600, 38400, 57600, 115200, 230400.

## Syntax

Command	Possible Response(s)
AT+CBAUD=<n>	OK or +CME ERROR: <err>
AT+CBAUD?	+CBAUD: <rate> OK
AT+CBAUD=?	+CBAUD: (list of supported <n>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<n>	<rate>
0	Auto baud rate
1	Auto baud rate
2	1200
3	2400
4	4800
5	9600
6	14400
7	19200
8	28800
9	Auto baud rate
10	33600
11	38400
12	57600
13	115200
14	230400
15	460800
16	921600

Note: the supported baud rate and default baud rate depends on the target. Suggest use 0 as default setting.

### 10.1.3 &K, RTS/CTS Flow Control

#### Description

This command configures the flow control. RTS (Request To Send) is an input line. The RTS signal is received from the terminal and a low level indicates that the modem can send more data. CTS (Clear To Send) is an output line. The CTS signal is sent to the terminal and a low level indicates that more data can be sent to the modem.

The RTS and CTS line together make up what is called RTS/CTS or “hardware” flow control. Both lines are used when “hardware flow control” is enabled in both the terminal and the modem devices. When the terminal is ready and able to receive data, it puts the RTS line in an active (low) condition to indicate this to the modem. If the terminal is not able to receive data (typically because its receive buffer is almost full), it puts the RTS line in an inactive (high) condition as a signal to the modem to stop sending data. When the terminal is ready to receive more data (for example, after data has been removed from its receive buffer), it places this line back in the active condition. The RTS line complements the CTS line. The modem puts the CTS line in an active condition to tell the terminal that it is ready to receive the data. Likewise, if the modem is unable to receive data, it places the CTS line in an inactive condition.

#### Syntax

Command	Possible Response(s)
AT&K<param>	OK or +CME ERROR: <err>
AT&K?	&K: <param> OK
AT&K=?	&K: (list of supported <param>s) OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<param>: integer type

- 0 Disable all terminal/Module control. Default value
- 3 Enable CTS/RTS terminal/ Module flow control

## 10.1.4 +IFC, RTS/CTS Flow Control

### Description

This parameter controls the operation of the local flow control between the terminal and the modem during the data state when V.42 error control is used, or when fallback to non-error control mode is specified to include buffering and flow control. It accepts two numeric subparameters:

- <DCE\_by\_DTE>: Specifies the method to be used by the terminal to control the flow of received data from the modem.
- <DTE\_by\_DCE>: Specifies the method to be used by the modem to control the flow of transmitted data from the terminal.

### Syntax

Command	Possible Response(s)
+IFC=[<DCE_by_DTE>[,<DTE_by_DCE>]]	OK or ERROR
AT+IFC?	+IFC: [<DCE_by_DTE>[,<DTE_by_DCE>]] OK
AT+IFC=?	+IFC: (list of supported <DCE_by_DTE>s,list of supported <DTE_by_DCE>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<DCE\_by\_DTE>: integer type

0 None

2 Circuit 133 (Ready for Receiving)

<DTE\_by\_DCE>: integer type

0 None

2 Circuit 106 (Clear to Send/Ready for Sending)

## 10.1.5 &C, Circuit 109 Behavior

### Description

This parameter determines how the state of the DCD line relates to the detection of the received line signal from the distant end. Changing the parameters will take effect immediately in both the command and online command states.

The DCD line is an output line that indicates the following:

In Circuit Switch Data mode an active (low) indicates that a valid carrier (data signal) was detected by the modem (CONNECT message is received), and inactive (high) indicates idle. The AT&C command always puts the DCD command ON, when set to 0. If the AT&C command is set to 1 then the "+++" escape command sets the DCD signal to an inactive state and the ATO command is set to active. AT&C set to 2 sets the DCD signal OFF.

In GPRS mode, the DCD line indicates the PDP context status. PDP context active sets the DCD to active (low); PDP context inactive sets the DCD to inactive (high). DCD is activated only when the PDP context is achieved. DCD is de-activated when the PDP context is off.

In Local Link mode, the DCD line indicates the Local Link data status.

When AT&C is set to 0, the DCD signal is always ON. When AT&C is set to 1, the DCD is activated in online mode. When AT&C is set to 2, the DCD is activated only when the PDP context is achieved (temporary IP address is received).

### Syntax

Command	Possible Response(s)
AT&C<param>	OK or +CME ERROR: <err>
AT&C?	&C: <param>

Command	Possible Response(s)
	OK
AT&C=?	&C: (list of supported <param>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<param>: integer type; And the default value is 1.

0 DCD is forced ON at all times.

1 DCD is set to ON when a CSD carrier is detected or a GPRS external session is being established or the modem enters PPP mode TE is about to send an LCP configure-request to the modem (GPRS connection is not yet established).

DCD is set to OFF when No CSD carrier is detected or the modem has lost its GPRS connection with the network (PDP context was deactivated and the IP address is cancelled).

2 DCD is set to ON when the modem establishes a GPRS connection with the network (PDP context is activated and the IP address is received from the network).

DCD is set to OFF when the modem has lost its GPRS connection with the network (PDP context was deactivated and the IP address is cancelled).

## 10.1.6 &D, Circuit 108 (Data Terminal Ready) behaviour

### Description

This parameter determines how the DCE responds when circuit 108/2 is changed from the ON to

the OFF condition during online data state.

### Syntax

Command	Possible Response(s)
AT&D[<value>]	OK or

Command	Possible Response(s)
	+CME ERROR: <err>
AT&D?	&D: <value> OK
AT&D=?	&D: (list of supported <value>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<value>: integer type

- 0 DCE ignores circuit 108/2. Default value
- 1 Upon an on-to-off transition of circuit 108/2, the DCE enters online command state and issues an OK result code; The call remains connected.
- 2 Upon an on-to-off transition of circuit 108/2, the DCE instructs the underlying DCE to perform an orderly clear-down of the call.  
  
The disposition of any data in the DCE pending transmission to the remote DCE is controlled by the +ETBM parameter (see 6.5.6) if implemented; otherwise, this data is sent before the call is cleared, unless the remote DCE clears the call first (in which case pending data is discarded). The DCE disconnects from the line. Automatic answer is disabled while circuit 108/2 remains off.

### For MUX and MUX\_INIT case:

- 0-3 Ignores DTR changes
- 4 Drops the MUX application and returns to PRE\_MUX state

# 11 GPRS

## 11.1 GPRS Functionality

GSM 07.07 defines commands that a TE may use to control a GPRS ME via a non-multiplexed

character-stream interface. This places certain limitations on the functionality of the interface. For example, it is not possible for the ME to send control information to the TE or for the TE to send commands to the ME whilst the interface is in the online data state, unless the layer 2 protocol itself supports this feature (GSM 07.60-12). However, Modem-specific escape mechanism (DTR) is provided to enable the TE to switch the Modem into limited online command state.

The use of a multiplexed interface, (GSM 07.10), is not considered here (See "Multiplexer Feature"). The Modem-specific escape mechanism use DTR as an escape signal (following &D parameters) and designed for limited non network related commands. This specific mechanism purpose is to give the user a way to retrieve the signal strength. The time limit of consecutive DTR toggles is a minimum of 90 seconds. The Modem-specific is not designed to support online command and data states both at the same time, therefore any wrong or extreme usage can cause unexpected behaviors. The basic GPRS concept is be "always connected" and there is no charge for being connected (only per real data transferred).

## 11.2 GPRS Commands

This section defines commands that a terminal may use to control a GPRS ME. GPRS MTs vary widely in functionality. A class A ME might support multiple PDP-types as well as circuit-switched data, and use multiple external networks QoS profiles. At the other extreme, a class C ME might support only a single PDP-type using a single external network, and rely on the HLR to contain the PDP context definition. A comprehensive set of GPRS-specific commands is defined below to provide the flexibility needed by the more complex ME. The commands are designed to be expandable to accommodate new PDP types and interface protocols, merely by defining new values for many of the parameters. Multiple contexts may be activated if the interface link-layer protocol is able to support them. The commands use the extended information and error message capabilities described in this specification. For MTs of intermediate complexity, most commands have simplified forms where certain parameters may be omitted. For the simplest MTs, and for backwards compatibility with existing communications software, it is possible to control access to the GPRS using existing modem-compatible commands. This "modem compatible" mode of operation is described below.

### 11.2.1 +CGCLASS, GPRS Mobile Station Class

#### Description

This command is used to set the Modem to operate according to the specified GPRS mobile class.

If the requested class is not supported, an ERROR or +CME ERROR response is returned. Extended error responses are enabled by the +CMEE command.

## Syntax

Command	Possible Response(s)
AT+CGCLASS=<class>	OK or +CME ERROR: <err>
AT+CGCLASS?	+CGCLASS: <class> OK
AT+CGCLASS=?	+CGCLASS: (list of supported <class>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	No	< 1s

## Defined Values

<class>: string type; indicates the mode of operation. The default value is manufacturer specific.

- A Class-A mode of operation (A/Gb mode), or CS/PS mode of operation (lu mode) (highest mode of operation)
- B Class-B mode of operation (A/Gb mode), or CS/PS mode of operation (lu mode)
- CG Class-C mode of operation in PS only mode (A/Gb mode), or PS mode of operation (lu mode)
- CC Class-C mode of operation in CS only mode (A/Gb mode), or CS (lu mode) (lowest mode of operation)



### NOTE:

<class> A means that the MT would operate simultaneous PS and CS service

<class> B means that the MT would operate PS and CS services but not simultaneously in A/Gb mode

<class> CG means that the MT would only operate PS services

<class> CC means that the MT would only operate CS services



Command	Possible Response(s)
	[...]
AT+CGDCONT=?	+CGDCONT: (range of supported <cid>s),<PDP_type>,,,(list of supported <d_comp>s),(list of supported <h_comp>s),(list of supported <IPv4AddrAlloc>s),(list of supported <request_type>s),(list of supported <P-CSCF_discovery>s),(list of supported <IM_CN_Signalling_Flag_Ind>s)[<CR><LF> +CGDCONT: (range of supported <cid>s),<PDP_type>,,,(list of supported <d_comp>s),(list of supported <h_comp>s),(list of supported <IPv4AddrAlloc>s),(list of supported <request_type>s),(list of supported <P-CSCF_discovery>s),(list of supported <IM_CN_Signalling_Flag_Ind>s)

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	Yes	< 1s

### Defined Values

<cid>: integer type; specifies a particular PDP context definition. The parameter is local to the TE-MT interface and is used in other PDP context-related commands. The range of permitted values is returned by the test form of the command.

NOTE 1: The <cid>s for network-initiated PDP contexts will have values outside the ranges indicated for the <cid> in the test form of the commands +CGDCONT and +CGDSCONT.

<PDP\_type>: string type; specifies the type of packet data protocol. The default value is manufacturer specific.

X.25 ITU-T/CCITT X.25 layer 3 (Obsolete)

IP Internet Protocol (IETF STD 5 [103])

IPV6 Internet Protocol, version 6 (see RFC 2460 [106])

IPV4V6 Virtual <PDP\_type> introduced to handle dual IP stack UE capability. (See 3GPP TS 24.301 [83])

OSPIH Internet Hosted Octect Stream Protocol (Obsolete)

PPP Point to Point Protocol (IETF STD 51 [104])

NOTE 2: Only IP, IPV6 and IPV4V6 values are supported for EPS services.

<APN>: string type; a logical name that is used to select the GGSN or the external packet data network. If the value is null or omitted, then the subscription value will be requested.

<PDP\_addr>: string type; identifies the MT in the address space applicable to the PDP. When +CGPIAF is supported, its settings can influence the format of this parameter returned with the read form of +CGDCONT.

NOTE 3: The value of this parameter is ignored with the set command. The parameter is included in the set command for backwards compatibility reasons only.

<d\_comp>: integer type; controls PDP data compression (applicable for SNDTCP only) (refer 3GPP TS 44.065 [61])

- 0 off
- 1 on (manufacturer preferred compression)
- 2 V.42bis
- 3 V.44

<h\_comp>: integer type; controls PDP header compression (refer 3GPP TS 44.065 [61] and 3GPP TS 25.323 [62])

- 0 off
- 1 on (manufacturer preferred compression)
- 2 RFC 1144 [105] (applicable for SNDTCP only)
- 3 RFC 2507 [107]
- 4 RFC 3095 [108] (applicable for PDCP only)

<IPv4AddrAlloc>: integer type; controls how the MT/TA requests to get the IPv4 address information

- 0 IPv4 address allocation through NAS signalling
- 1 IPv4 address allocated through DHCP

<request\_type>: integer type; indicates the type of PDP context activation request for the PDP context, see 3GPP TS 24.301 (subclause 6.5.1.2) and 3GPP TS 24.008 (subclause 10.5.6.17). According to 3GPP TS 24.008 (subclause 4.2.4.2.2 and subclause 4.2.5.1.4) and 3GPP TS 24.301 (subclause 5.2.2.3.3 and subclause 5.2.3.2.2), a separate PDP context must be established for emergency bearer services.

NOTE 4: If the PDP context for emergency bearer services is the only activated context, only emergency calls are allowed, see 3GPP TS 23.401 subclause 4.3.12.9.

- 0 PDP context is for new PDP context establishment or for handover from a non-3GPP access network

(how the MT decides whether the PDP context is for new PDP context establishment or for handover is implementation specific)

- 1 PDP context is for emergency bearer services
- 2 PDP context is for new PDP context establishment
- 3 PDP context is for handover from a non-3GPP access network

<P-CSCF\_discovery>: integer type; influences how the MT/TA requests to get the P-CSCF address, see 3GPP TS 24.229 annex B and annex L.

- 0 Preference of P-CSCF address discovery not influenced by +CGDCONT
- 1 Preference of P-CSCF address discovery through NAS signaling
- 2 Preference of P-CSCF address discovery through DHCP

<IM\_CN\_Signalling\_Flag\_Ind>: integer type; indicates to the network whether the PDP context is for IM CN subsystem-related signaling only or not.

- 0 UE indicates that the PDP context is not for IM CN subsystem-related signaling only
- 1 UE indicates that the PDP context is for IM CN subsystem-related signaling only

### 11.2.3 +CGQMIN, Quality of Service Profile (Min Acceptable)

#### Description

This command enables the terminal to specify the minimum acceptable profile which is checked by the ME against the negotiated profile returned in the Activate PDP Context Accept message.

#### Syntax

Command	Possible Response(s)
AT+CGQMIN=<cid>[,<precedence>[,<delay>[,<reliability.>[,<peak>[,<mean>]]]]]	OK or +CME ERROR: <err>
AT+CGQMIN?	+CGQMIN: <cid>,<precedence>,<delay>,<reliability>,<peak>,<mean>[<CR><LF> +CGQMIN: <cid>,<precedence>,<delay>,<reliability.>,<peak>,<mean>[.. .]] OK or

Command	Possible Response(s)
	+CME ERROR: <err>
AT+CGQMIN=?	+CGQMIN: <PDP_type>,(list of supported <precedence>s),(list of supported <delay>s),(list of supported <reliability>s),(list of supported <peak>s),(list of supported <mean>s) OK or +CME ERROR: <err>

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<cid>: integer type; specifies a particular PDP context definition (see the +CGDCONT and +CGDSCONT commands).

<PDP\_type>: string type; specifies the type of packet data protocol (see the +CGDCONT command). The following parameters are defined in 3GPP TS 23.107 [46]:

<precedence>: integer type; specifies the precedence class

<delay>: integer type; specifies the delay class

<reliability>: integer type; specifies the reliability class

<peak>: integer type; specifies the peak throughput class

<mean>: integer type; specifies the mean throughput class

## 11.2.4 +CGQREQ, Quality of Service Profile (Requested)

### Description

This command enables the terminal to specify a Quality of Service Profile that is used when the ME sends an Activate PDP Context Request message to the network.

## Syntax

Command	Possible Response(s)
AT+CGQREQ=<cid>[,<precedence>[,<delay>[,<reliability>[,<peak>[,<mean>]]]]]	OK or +CME ERROR: <err>
AT+CGQREQ?	+CGQREQ: <cid>,<precedence>,<delay>,<reliability>,<peak>,<mean> OK
AT+CGQREQ=?	+CGQREQ: <PDP_type>,(list of supported<precedence>s),(list of supported <delay>s),(list of supported <reliability>s),(list of supported <peak>s),(list of supported <mean>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<cid>: integer type; specifies a particular PDP context definition (see the +CGDCONT and +CGDSCONT commands).

<PDP\_type>: string type; specifies the type of packet data protocol (see the +CGDCONT command). The following parameters are defined in 3GPP TS 23.107 [46]:

<precedence>: integer type; specifies the precedence class

<delay>: integer type; specifies the delay class

<reliability>: integer type; specifies the reliability class

<peak>: integer type; specifies the peak throughput class

<mean>: integer type; specifies the mean throughput class

## 11.2.5 +CGATT, Packet Domain Attach or Detach

### Description

The execution command is used to attach the MT to, or detach the MT from, the Packet Domain service.

After the command has completed, the MT remains in V.250 command state. If the MT is already in the requested state, the command is ignored and the OK response is returned. If the requested state cannot be achieved, an ERROR or +CME ERROR response is returned. Extended error responses are enabled by the +CMEE command.

### Syntax

Command	Possible Response(s)
AT+CGATT=<state>	OK or +CME ERROR: <err>
AT+CGATT?	+CGATT: <state> OK
AT+CGATT=?	+CGATT: (list of supported <state>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	<15s

### Defined Values

<state>: integer type; indicates the state of PS attachment

- 0 detached
- 1 attached

## 11.2.6 D\*99, Request GPRS Service "D"

### Description

This command enables the ME to perform the actions necessary for establishing communication between the terminal and the external Packet Data Network (PDN).

The ITU V.25ter 'D' (Dial) command causes the ME to enter the ITU V.25ter Online Data state and together with the terminal, to start the specified layer 2 protocol. The ME returns CONNECT to confirm acceptance of the command prior to entering the ITU V.25ter Online Data state. No further commands

may follow on the AT command line.

The detailed behavior after the Online Data state has been entered is dependent on the PDP type, and is described briefly. GPRS attachment and PDP context activation procedures may take place prior to, or during the PDP startup if they have not already been performed using the +CGATT and +CGACT commands.

When the layer 2 protocols have terminated, either as a result of an orderly shutdown of the PDP or an error, the ME enters the ITU V.25ter command state and returns the NO CARRIER final result code.

If <called address> is supported and provided, the ME automatically sets up a virtual call to the specified address after the PDP context has been activated.

If <L2P> and <cid> are supported, the +CGDCONT, +CGQREQ and other such commands may then be used in the modem initialization AT command string to set values for PDP type, APN, QoS and so on.

If <L2P> is not supported, or is supported but omitted, the ME uses a layer 2 protocol appropriate to the PDP type.

If <cid> is not supported, or is supported but omitted, the ME attempts to activate the context using one of the following:

- Any information provided by the terminal during the PDP start up procedure. For example, the terminal may provide a PDP type and/or PDP address to the ME.
- A prior knowledge, for example, the ME may implement only one PDP type.

Using the "Empty PDP type" No PDP address or APN is sent in this case and only one PDP context subscription record is present in the HLR for this subscriber.

This command may be used in both normal and modem compatibility modes.

## Syntax

Command	Possible Response(s)
ATD*<GPRS_SC>[* [<called_address>] [*<L2P>][*<cid>]]]#	CONNECT or ERROR

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	<30s

## Defined Values

<GPRS\_SC>: string type; GPRS Service Code to identify a request to use GPRS.

<called\_address>: string type; to identify the called party in the address space applicable to the PDP. For communications software that does not support arbitrary characters in the dial string, a numeric equivalent may be used. Also, the comma character "," may be used as a substitute for the period character ".".

For PDP type OSP: IHOSS, the following syntax may be used for

<called\_address>: string type; [<host>] [@[<port>] [@[<protocol>]]] where <host>, <port> and <protocol> are defined in "+CGDCONT, Define PDP Context".

For communications software that does not support arbitrary characters in the dial string, a numeric value equivalent to the host name may be used. However, this should be avoided if at all possible.

<L2P>: string type; to indicate the layer 2 protocol to be used.

For communications software that does not support arbitrary characters in the dial string, the following numeric equivalents are used:

- 0 NULL
- 1 PPP
- 2 PAD
- 3 X25
- 9 yyyy M-xxxx

Other values are reserved and result in an ERROR response to the Set command.

Note: V.250 (and certain communications software) do not permit arbitrary characters in the dial string. The

<L2P> and <called\_address> strings are therefore specified as containing digits (0-9) only.

<cid>: integer type; to specify a particular PDP context definition (See "+CGDCONT, Define PDP Context").

## 11.2.7 +CGACT, PDP Context Activate or Deactivate

### Description

The execution command is used to activate or deactivate the specified PDP context (s). After the command has completed, the MT remains in V.250 command state. If any PDP context is already in the requested state, the state for that context remains unchanged. If the requested state for any specified context cannot be achieved, an ERROR or +CME ERROR response is returned. Extended error responses are enabled by the +CMEE command. If the MT is not PS attached when the activation form of the command is executed, the MT first performs a PS attach and then attempts to activate the

specified contexts. If the attach fails then the MT responds with ERROR or, if extended error responses are enabled, with the appropriate failure-to-attach error message.

For EPS, if an attempt is made to disconnect the last PDN connection, then the MT responds with ERROR or, if extended error responses are enabled, a +CME ERROR.

## Syntax

Command	Possible Response(s)
AT+CGACT=[<state>[,<cid>[,<cid>[,]]]]	OK or NO CARRIER or +CME ERROR: <err> or : +CGACT: <cid>,<stat>,<ip><CR><LF> +CGACT: <cid>,<stat>,<ip><CR><LF> +CGACT: <cid>,<stat>,<ip><CR><LF> ... OK
AT+CGACT?	+CGACT: <cid>,<state><CR><LF> +CGACT: <cid>,<state><CR><LF> +CGACT: <cid>,<state> OK
AT+CGACT=?	+CGACT: (list of supported <state>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	<30s

## Defined Values

<state>: integer type; indicates the state of PDP context activation. The default value is manufacturer specific.

0 deactivated

1 activated

<cid>: integer type; specifies a particular PDP context definition (see the +CGDCONT and +CGDSCONT commands).

## 11.2.8 +CGPADDR, GPRS Addresses

### Description

The execution command returns a list of PDP addresses for the specified context identifiers. If no <cid> is specified, the addresses for all defined contexts are returned.

### Syntax

Command	Possible Response(s)
AT+CGPADDR[=<cid>[,<cid>[,]]]	+CGPADDR: <cid>[,<PDP_addr_1>[,<PDP_addr_2> ] [<CR><LF>+CGPADDR: <cid>[,<PDP_addr_1>[,<PDP_addr_2>]]][...] OK
AT+CGPADDR=?	+CGPADDR: (list of defined <cid>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<cid>: integer type; specifies a particular PDP context definition (see the +CGDCONT and +CGDSCONT commands).

<PDP\_addr\_1> and <PDP\_addr\_2>: each is a string type that identifies the MT in the address space

applicable to the PDP. The address may be static or dynamic. For a static address, it will be the one set by the +CGDCONT and +CGDSCONT commands when the context was defined.

For a dynamic address it will be the one assigned during the last PDP context activation that used the context definition referred to by <cid>. Both <PDP\_addr\_1> and <PDP\_addr\_2> are omitted if none is available. Both <PDP\_addr\_1> and <PDP\_addr\_2> are included when both IPv4 and IPv6 addresses

are assigned, with <PDP\_addr\_1> containing the IPv4 address and <PDP\_addr\_2> containing the IPv6 address.

The string is given as dot-separated numeric (0-255) parameter of the form: a1.a2.a3.a4 for IPv4 and a1.a2.a3.a4.a5.a6.a7.a8.a9.a10.a11.a12.a13.a14.a15.a16 for IPv6.

When +CGPIAF is supported, its settings can influence the format of the IPv6 address in parameter <PDP\_addr\_1> or <PDP\_addr\_2> returned with the execute form of +CGPADDR.

## 11.2.9 +GTDNS, Request DNS Addresses

### Description

This command is used to obtain the primary and secondary DNS address when PDP context specified by profile id is activated.

### Syntax

Command	Possible Response(s)
AT+GTDNS=<cid>	+GTDNS: <cid>,<Primary_DNS_addr>,<Secondary_DNS_addr> OK
AT+GTDNS?	+GTDNS: <cid1>,<Primary_DNS_addr1>,<Secondary_DNS_addr1> +GTDNS: <cid2>,<Primary_DNS_addr2>,<Secondary_DNS_addr2> ..... +GTDNS: <cidn>,<Primary_DNS_addrn>,<Secondary_DNS_addrn> OK
AT+GTDNS=?	+GTDNS: (list of defined <cid>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<cid>: integer type; specifies a particular PDP context definition (see the +CGDCONT and +CGDSCONT commands).

<Primary\_DNS\_addr>: String type. Primary DNS address

<Secondary\_DNS\_addr>: String type. Secondary DNS address

### 11.2.10 +CGCMOD, PDP Context Modify

#### Description

This command is used to modify the specified PDP context (s) with respect to QoS profiles and TFTs.

#### Syntax

Command	Possible Response(s)
AT+CGCMOD=[<cid>[,<cid>[,...]]]	OK or +CME ERROR: <err>
AT+CGCMOD=?	+CGCMOD: (list of <cid>s associated with active contexts) OK

#### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<cid>: integer type; specifies a particular PDP context definition (see the +CGDCONT and +CGDSCONT commands).

### 11.2.11 +CGDATA, Enter Data State

#### Description

This execution command causes the MT to perform whatever actions are necessary to establish communication between the TE and the network using one or more GPRS PDP types. This may include performing a GPRS attach and one or more PDP context activation. If the parameters are accepted, MT

displays the intermediate result code CONNECT on TE and enters the online data state; thereafter data transfer may proceed. No other commands following +CGDATA in the command line will be processed.

### Syntax

Command	Possible Response(s)
AT+CGDATA=[<L2P>,[<cid>,[<cid>[,...]]]]	CONNECT It follows data transfer or +CME ERROR: <err>
AT+CGDATA=?	+CGDATA: (list of supported <L2P>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

### Defined Values

<L2P>: string type; indicates the layer 2 protocol to be used between the TE and MT

- NULL none, for PDP type OSP:IHOSS (Obsolete)
- PPP Point-to-point protocol for a PDP such as IP
- PAD character stream for X.25 character (triple X PAD) mode (Obsolete)
- X25 X.25 L2 (LAPB) for X.25 packet mode (Obsolete)
- M-xxxx manufacturer-specific protocol (xxxx is an alphanumeric string)

Note: If the value is omitted, the layer 2 protocol is unspecified. Other values are reserved and will result in an ERROR response.

<cid>: integer type; specifies a particular PDP context definition (see the +CGDCONT and +CGDSCONT commands).

## 11.2.12 +MGAUTH, Set type of authentication

### Description

This command is used to set the type of PPP authentication (PAP/CHAP) and username and password

for the specified PDP context.



**Note:**

If Host has specified the authentication type when it makes a PPP connection, the setting of +MGAUTH will be not taking effect. or else the setting of +MGAUTH will be taking effect.

## Syntax

Command	Possible Response(s)
AT+MGAUTH=<cid>,<auth>[,<name>,<pwd>]	OK  or  +CME ERROR: <err>
AT+MGAUTH?	+MGAUTH: <cid>,<auth>  ...  OK  or  OK
AT+MGAUTH=?	+MGAUTH: (list of supported <cid>s),(list of supported <auth>s),(max length of supported <name>),(max length of supported <pwd>)  OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	Yes	< 1s

## Defined Values

<cid>: integer type; specifies a particular PDP context definition (see the +CGDCONT and +CGDSCONT commands).

<auth>: integer type; Authentication may be:

- 0 Authentication protocol is not used (NONE)

- 1 Password Authentication Protocol (PAP)
- 2 Challenge-Handshake Authentication Protocol (CHAP)
- 3 PAP and CHAP

<name>: string type; User name and the maximum length: 64 bytes

<pwd>: string type; Password and the maximum length: 64 bytes

### 11.2.13 +CGEQOS, Define EPS Quality Of Service

#### Description

The set command allows the TE to specify the EPS Quality of Service parameters <cid>, <QCI>, [<DL\_GBR> and <UL\_GBR>] and [<DL\_MBR> and <UL\_MBR>] for a PDP context or Traffic Flows(see 3GPP TS 24.301 [83] and 3GPP TS 23.203 [85]). When in UMTS/GPRS the MT applies a mapping function to UMTS/GPRS Quality of Service.

A special form of the set command, +CGEQOS= <cid> causes the values for context number <cid> to become undefined.

The read command returns the current settings for each defined QoS.

The test command returns the ranges of the supported parameters as compound values.

#### Syntax

Command	Possible Response(s)
AT+CGEQOS=[<cid>[,<QCI>[,<DL_GBR>,<UL_GBR>[,<DL_MBR>,<UL_MBR>]]]]	OK or +CME ERROR: <err>
AT+CGEQOS?	+CGEQOS: <cid>,<QCI>, [<DL_GBR>,<UL_GBR>],[<DL_MBR>,<UL_MBR>] [<CR>>LF>+CGEQOS: <cid>,<QCI>, [<DL_GBR>,<UL_GBR>],[<DL_MBR>,<UL_MBR>] [...]]
AT+CGEQOS=?	+CGEQOS: (range of supported <cid>s),(list of supported <QCI>s),(list of supported <DL_GBR>s),(list of supported <UL_GBR>s),(list of supported <DL_MBR>s),(list of supported <UL_MBR>s)

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<cid>: integer type; specifies a particular EPS Traffic Flows definition in EPS and a PDP Context definition in UMTS/GPRS (see the +CGDCONT and +CGDSCONT commands).

<QCI>: integer type; specifies a class of EPS QoS (see 3GPP TS 23.203 [85] and 3GPP TS 24.301 [83]).

0 QCI is selected by network

[1 – 4] value range for guaranteed bit rate Traffic Flows

[5 – 9] value range for non-guaranteed bit rate Traffic Flows

[128 – 254] value range for Operator-specific QCIs

The QCI values 65, 66, 69 and 70 are not allowed to be requested by the UE. If the TE requests a QCI parameter 65, 66, 69 or 70, the MT responds with result code +CME ERROR: 181 (unsupported QCI value).

<DL\_GBR>: integer type; indicates DL GBR in case of GBR QCI. The value is in kbit/s. This parameter is omitted for a non-GBR QCI (see 3GPP TS 24.301 [83]).

<UL\_GBR>: integer type; indicates UL GBR in case of GBR QCI. The value is in kbit/s. This parameter is omitted for a non-GBR QCI (see 3GPP TS 24.301 [83]).

<DL\_MBR>: integer type; indicates DL MBR in case of GBR QCI. The value is in kbit/s. This parameter is omitted for a non-GBR QCI (see 3GPP TS 24.301 [83]).

<UL\_MBR>: integer type; indicates UL MBR in case of GBR QCI. The value is in kbit/s. This parameter is omitted for a non-GBR QCI (see 3GPP TS 24.301 [83]).

# 12 Fibocom Proprietary Commands

## 12.1 Set Profile Commands

### 12.1.1 +GTUSBMODE, Set USB Configuration Profile

#### Description

This command changes the USB configuration profile of the module. There are two main profiles:

AT+NCM profile for legacy AT command and MBIM profile for Windows 8.1/Windows 10 supporting. The

new profile is activated after a reset or power cycle.

### Syntax

Command	Possible Response(s)
AT+GTUSBMODE=<mode>	OK or +CME ERROR: <err>
AT+GTUSBMODE?	+GTUSBMODE: <mode> OK
AT+GTUSBMODE=?	+GTUSBMODE: (list of supported <mode>s) OK

### Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	Yes	Yes	No	< 1s

### Defined Values

<mode>: integer type and supported mode depends on the target device and they may be as below:

- 1 Reserve
- 2 ECM+5ACM(2EP)
- 3 MBIM
- 4 MBIM+2ACM
- 5 MBIM+3ACM
- 6 MBIM+GNSS
- 7 MBIM+GNSS+2ACM
- 8 NCM+3ACM
- 9 NCM+ACM(2EP)
- 10 NCM+2ACM(2EP)
- 11 3ACM+3NCM
- 12 4ACM
- 13 7ACM

- 14 2ACM(2EP)+ACM
- 15 ACM(2EP)+ACM
- 16 MBIM Morphing
- 17 Diag+Modem+AT+Pipe+RMNET+ADB
- 18 Diag+Modem+AT+Pipe+ECM+ADB
- 19 Diag+Modem+Pipe+RMNET+Mystorage
- 20 Modem
- 21 Modem+AT
- 22 Modem+AT+RMNET
- 23 Modem+AT+ECM
- 24 RNDIS+Modem+Diag+ADB
- 31 Modem+NV+MOS+Diag+LOG+AT+AT
- 32 ECM+Modem+NV+MOS+Diag+LOG+AT+AT
- 33 RNDIS+Modem+NV+MOS+Diag+LOG+AT+AT

## 12.1.2 +GTRNDIS, RNDIS Configuration

### Description

This command is used to enable/disable RNDIS function with specified cid.

Note before enable RNDIS function, make sure the PDP context with this specified cid have been activated.

### Syntax

Command	Possible Response(s)
+GTRNDIS=<state>,<cid>	OK or ERROR
+GTRNDIS?	+GTRNDIS: <state>,<cid>,<ip>,<pdns>,<sdns> OK or +GTRNDIS: 0
AT+ GTRNDIS=?	+GTRNDIS: (list of supported <state>s),(list of supported <cid>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
Yes	Yes	Yes	No	< 1s

## Defined Values

<state>: integer type

0 deactivate RNDIS. Default value.

1 active RNDIS

<cid>: integer type; profile id used by RNDIS and specified with AT+CGDCONT

<ip>: string type; IP address assigned by network to RNDIS device via PDP context activate accept

<pdns>: string type; primary DNS assigned by network via PDP context activate accept

<sdns>: string type; secondary DNS assigned by network via PDP context activate accept

# 13 Error Handling and Error Code

## 13.1 Error Handling Commands

### 13.1.1 +CMEE, Report Mobile Equipment Error

#### Description

The Set command disables or enables the use of result code +CME ERROR: <err> as an indication of an error relating to the functionality of the MODEM. When enabled, Modem -related errors cause a +CME ERROR: <err> final result code instead of the regular ERROR final result code. Usually, ERROR is returned when the error is related to syntax, invalid parameters or terminal functionality.

For all Accessory AT commands besides SMS commands, the +CMEE set command disables or enables the use of result code +CME ERROR: <err> as an indication of an error relating to the functionality of the Modem. When enabled, Modem related errors cause a +CME ERROR: <err> final result code instead of the regular ERROR result code.

For all SMS AT commands that are derived from GSM 07.05, the +CMEE Set command disables or enables the use of result code +CMS ERROR: <err> as an indication of an error relating to the functionality of the modem. When enabled, modem -related errors cause a +CMS ERROR: <err> final result code instead of the regular ERROR final result.

## Syntax

Command	Possible Response(s)
AT+CMEE=[<n>]	OK or +CME ERROR: <err> Note: the original setting is not changed if AT+CMEE=
AT+CMEE?	+CMEE: <n> OK
AT+CMEE=?	+CMEE: (list of supported <n>s) OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<n>: integer type

- 0 Disable the +CME ERROR: <err> result code and use ERROR. Default value
- 1 Enable the +CME ERROR: <err> or +CMS ERROR: <err> result codes and use numeric <err> values or +STK ERROR: <err> result codes and use numeric <err> values.
- 2 Enable the +CME ERROR: <err> or +CMS ERROR: <err> result codes and use verbose <err> values or +STK ERROR: <err> result codes and use numeric <err> values.

### 13.1.2 +CEER, Extended Error Report

#### Description

This execution command returns an extended error report containing one or more lines of information text <report>, determined by the manufacturer, providing reasons for the following errors:

- ◆ Failure in the last unsuccessful call setup (originating or answering) or the in-call modification.
- ◆ Last call release.

Typically, the text consists of a single line containing the reason for the error according to information given by GSM network, in textual format.

## Syntax

Command	Possible Response(s)
AT+CEER	+CEER: <category>[,<cause>,<description>] OK
AT+CEER=?	OK

## Attributes

Pin Restricted	Persistent	Sync Mode	Effect Immediately	Time of Duration
No	No	Yes	Yes	< 1s

## Defined Values

<category>: string type

“No report available”

“CC setup error”

“CC modification error”

“CC release”

“SM attach error”

“SM detach”

“SM activation error”

“SM deactivation”

“SS – network error cause”

“SS – network reject cause”


“SS – network GSM cause”

<cause>: contains a digit representing the error cause sent by network or internally

<description>: string type; contains the textual representation of the Cause

## 13.2 CME Error

Parameter	Description
<err>	0, "phone failure" 1, "no connection to phone" 2, "phone-adapter link reserved" 3, "operation not allowed" 4, "operation not supported" 5, "PH-SIM PIN required" 6, "PH-FSIM PIN required" 7, "PH-FSIM PUK required" 10, "SIM not inserted" 11, "SIM PIN required" 12, "SIM PUK required" 13, "SIM failure" 14, "SIM busy" 15, "SIM wrong" 16, "incorrect password" 17, "SIM PIN2 required" 18, "SIM PUK2 required" 19, "incorrect PUK1" 20, "memory full" 21, "invalid index" 22, "not found" 23, "memory failure" 24, "text string too long" 25, "invalid characters in text string" 26, "dial string too long" 27, "invalid characters in dial string" 30, "no network service" 31, "network timeout" 32, "network not allowed - emergency calls only" 40, "network personalization PIN required" 41, "network personalization PUK required"

Parameter	Description
	42, "network subset personalization PIN required"
	43, "network subset personalization PUK required"
	44, "service provider personalization PIN required"
	45, "service provider personalization PUK required"
	46, "corporate personalization PIN required"
	47, "corporate personalization PUK required"
	48, "hidden key required"
	 <b>Note:</b> This key is required when accessing hidden phonebook entries.)
	49, "EAP method not supported"
	50, "Incorrect parameters"
	100, "unknown"
	103, "Illegal MS"
	106, "Illegal ME"
	107, "GPRS services not allowed"
	111, "PLMN not allowed"
	112, "location area not allowed"
	113, "roaming not allowed in this location area"
	114, "GPRS services not allowed in this PLMN"
	116, "MSC temporarily not reachable"
	117, "Network failure"
	132, "Service not supported"
	133, "Service not subscribed"
	134, "service option temporarily out of order"
	135, "NS-api already used"
	148, "Unspecified GPRS error"
	149, "PDP authentication error"
	150, "invalid mobile class"
	244, "Attach failure"
	257, "Invalid error mapping"
	258, "APN not listed in APN Control List (ACL)"
	701, "incorrect security code"
	702, "max attempts reached"

Parameter	Description
	1001, "Unassigned (unallocated) number"
	1003, "No route to destination"
	1006, "Channel unacceptable"
	1008, "Operator determined barring"
	1016, "Normal call clearing"
	1017, "User busy"
	1018, "No user responding"
	1019, "User alerting, no answer"
	1021, "Call rejected"
	1022, "Number changed"
	1026, "Non selected user clearing"
	1027, "Destination out of order"
	1028, "Invalid number format (incomplete number)"
	1029, "Facility rejected"
	1030, "Response to STATUS ENQUIRY"
	1031, "Normal, unspecified"
	1034, "No circuit/channel available"
	1038, "Network out of order"
	1041, "Temporary failure"
	1042, "Switching equipment congestion"
	1043, "Access information discarded"
	1044, "requested circuit/channel not available"
	1047, "Resources unavailable, unspecified"
	1049, "Quality of service unavailable"
	1050, "Requested facility not subscribed"
	1055, "Incoming calls barred within the CUG"
	1057, "Bearer capability not authorized"
	1058, "Bearer capability not presently available"
	1063, "Service or option not available, unspecified"
	1065, "Bearer service not implemented"
	1068, "ACM equal to or greater than ACMmax"
	1069, "Requested facility not implemented"
	1070, "Only restr. digital information bearer capability"

Parameter	Description
	1079, "Service or option not implemented, unspecified"
	1081, "Invalid transaction identifier value"
	1087, "User not member of CUG"
	1088, "Incompatible destination"
	1091, "Invalid transit network selection"
	1095, "Semantically incorrect message"
	1096, "Invalid mandatory information"
	1097, "Message type non-existent or not implemented"
	1098, "Message type not compatible with protocol state"
	1099, "Information element non-existent or not implemented"
	1100, "Conditional IE error"
	1101, "Message not compatible with protocol state"
	1102, "Recovery on timer expiry"
	1111, "Protocol error, unspecified"
	1127, "Interworking, unspecified"
	1279, "Number not allowed"
	1283, "CCBS possible"

### 13.3 CMS Error

Parameter	Description
<err>	1, "Unassigned (unallocated) number"
	8, "Operator determined barring"
	10, "Call barred"
	17, "Network failure"
	21, "Short message transfer rejected"
	22, "Memory capacity exceeded"
	27, "Destination out of service"
	28, "Unidentified subscriber"
	29, "Facility rejected"
	30, "Unknown Subscriber"
	38, "Network out of order"
	41, "Temporary failure"

Parameter	Description
	42, "Congestion"
	47, "Resources unavailable, unspecified"
	50, "Requested facility not subscribed"
	69, "Requested facility not implemented"
	81, "Invalid short message reference value"
	95, "Invalid message, unspecified"
	96, "Invalid mandatory information"
	97, "Message type non-existent or not implemented"
	98, "Message not compatible with short message protocol state"
	99, "Information element non-existent or not implemented"
	111, "Protocol error, unspecified"
	127, "Interworking unspecified"
	128, "Telematic interworking not supported"
	129, "Short message type 0 not supported"
	130, "Cannot replace short message"
	143, "Unspecified TP-PID error"
	144, "Data coding scheme (alphabet) not supported"
	145, "Message class not supported"
	159, "Unspecified TP-DCS error"
	160, "Command cannot be action"
	161, "Command unsupported"
	175, "Unspecified TP-Command error"
	176, "TPDU not supported"
	192, "SC busy"
	193, "No SC subscription"
	194, "SC system failure"
	195, "Invalid SME address"
	196, "Destination SME barred"
	197, "SM Rejected-Duplicate SM"
	198, "TP-VPF not supported"
	199, "TP-VP not supported"
	208, "SIM SMS storage full"
	209, "No SMS storage capability in SIM"

Parameter	Description
	210, "Error in MS"
	211, "Memory Capacity Exceeded"
	212, "SIM Application Toolkit Busy"
	213, "SIM data download error"
	224, "TP_FCS_APPL_ERR_START"
	254, "TP_FCS_APPL_ERR_STOP"
	255, "TP_FCS_UNSPECIFIED"
	300, "ME failure"
	301, "SMS service of ME reserved"
	302, "operation not allowed"
	303, "operation not supported"
	304, "Invalid PDU mode param"
	305, "invalid text mode parameter"
	310, "SIM not inserted"
	311, "SIM PIN required"
	312, "PH-SIM PIN necessary"
	313, "SIM failure"
	314, "SIM busy"
	315, "SIM wrong"
	317, "SIM PIN2 required"
	318, "SIM PUK2 required"
	319, "incorrect PUK1"
	320, "memory failure"
	321, "invalid memory index"
	322, "memory full"
	330, "SMSC address unknown"
	331, "no network service"
	332, "network timeout"
	340, "no +CNMA acknowledgement expected"
	512, "MN_SMS_RP_ACK"
	513, "MN_SMS_TIMER_EXPIRED"
	514, "MN_SMS_FORW_AVAIL_FAILED"
	515, "MN_SMS_FORW_AVAIL_ABORTED"

Parameter	Description
	516, "MS invalid TP-Message-Type-Indicator"
	517, "MS no TP-Status-Report in Phase 1"
	518, "MS no TP-Reject-Duplicate in Phase 1"
	519, "MS no TP-Reply-Path in Phase 1"
	520, "MS no TP-User-Data-Header in Phase 1"
	521, "MS missing TP-Validity-Period"
	522, "MS invalid TP-Service-Centre-Time-Stamp"
	523, "MS missing TP-Destination-Address"
	524, "MS invalid TP-Destination-Address"
	525, "MS missing Service-Centre-Address"
	526, "MS invalid Service-Centre-Address"
	527, "MS invalid alphabet"
	528, "MS invalid TP-User-Data-Length"
	529, "MS missing TP-User-Data"
	530, "MS TP-User-Data too long"
	531, "MS no Command-Request in Phase 1"
	532, "MS Cmd-Req invalid TP-Destination-Address"
	533, "MS Cmd-Req invalid TP-User-Data-Length"
	534, "MS Cmd-Req invalid TP-User-Data"
	535, "MS Cmd-Req invalid TP-Command-Type"
	536, "MN MNR creation failed"
	537, "MS CMM creation failed"
	538, "MS network connection lost"
	539, "MS pending MO SM transfer"
	540, "RP-Error OK"
	541, "RP-Error OK no icon display"
	542, "SMS-PP Unspecified"
	543, "SMS rejected By SMS CONTROL"